



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

SPECfp<sup>®</sup>\_rate2006 = 1070

SPECfp\_rate\_base2006 = 1050

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2014

Hardware Availability: Jun-2014

Software Availability: Nov-2013

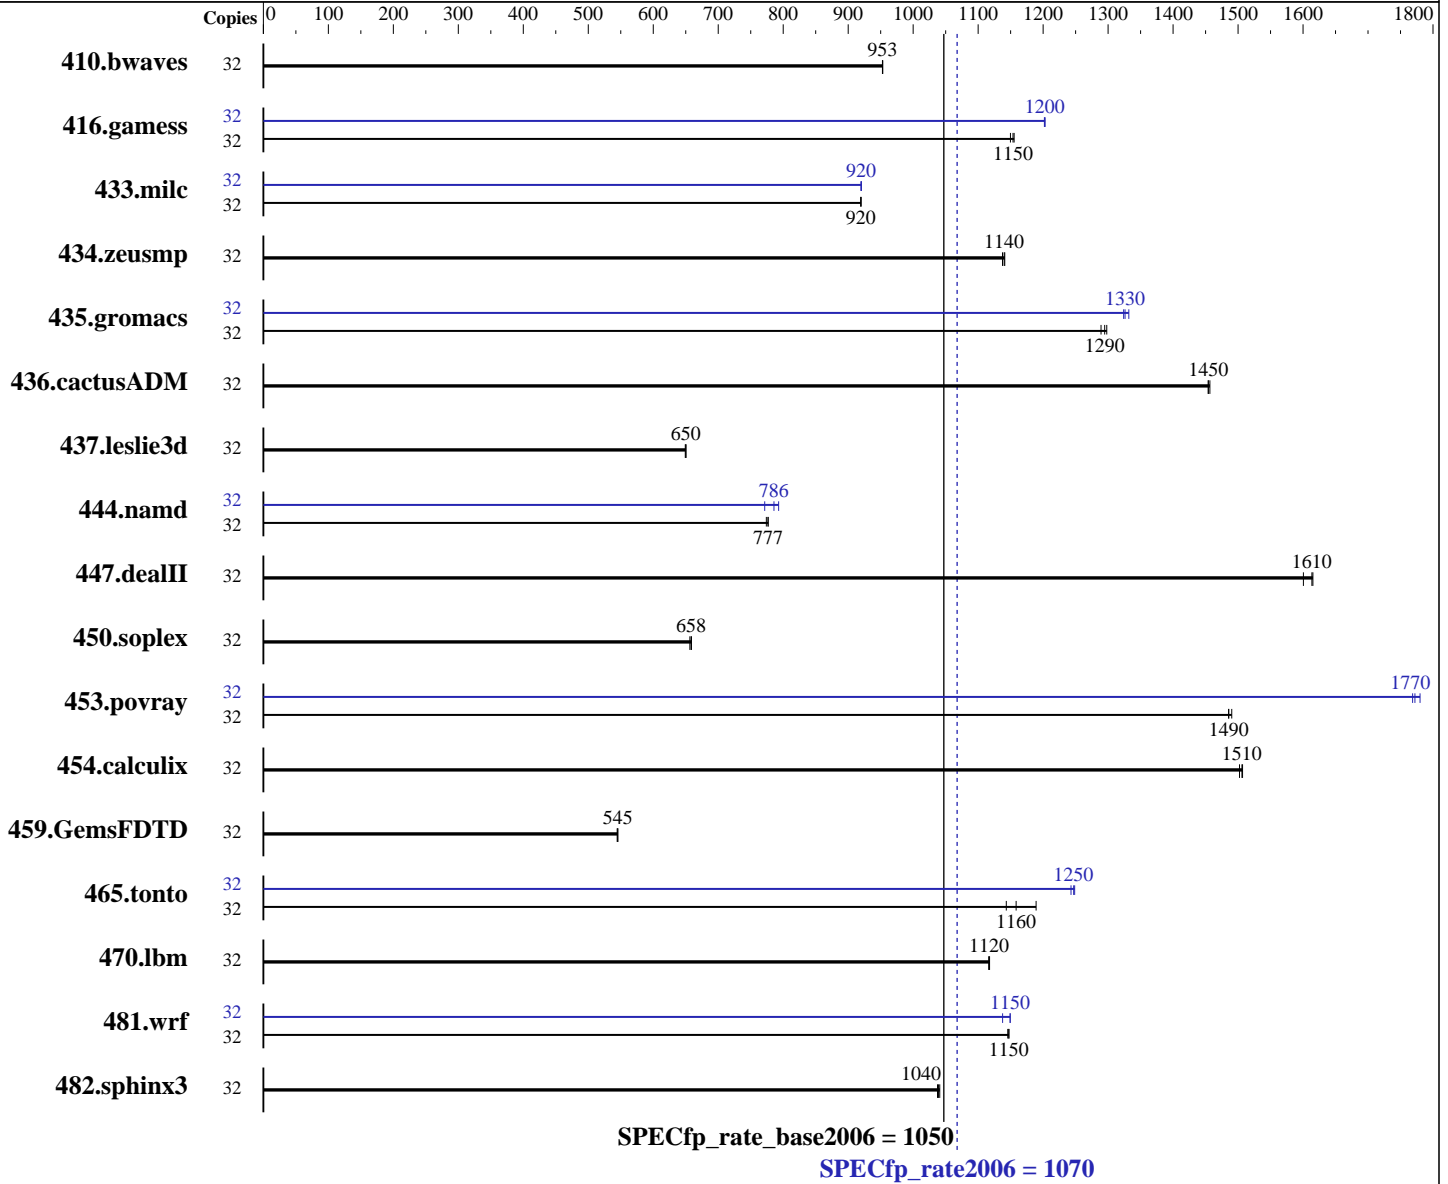

### Hardware

CPU Name: Intel Xeon E5-4627 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip  
 CPU(s) orderable: 4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

SPECfp\_rate2006 = 1070

SPECfp\_rate\_base2006 = 1050

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Aug-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	456	953	<b>456</b>	<b>953</b>	456	953	32	456	953	<b>456</b>	<b>953</b>	456	953		
416.gamess	32	545	1150	<b>543</b>	<b>1150</b>	542	1160	32	<b>521</b>	<b>1200</b>	521	1200	521	1200		
433.milc	32	319	919	<b>319</b>	<b>920</b>	319	920	32	<b>319</b>	<b>920</b>	319	920	319	920		
434.zeusmp	32	256	1140	255	1140	<b>255</b>	<b>1140</b>	32	256	1140	255	1140	<b>255</b>	<b>1140</b>		
435.gromacs	32	176	1300	<b>176</b>	<b>1290</b>	177	1290	32	172	1330	173	1320	<b>172</b>	<b>1330</b>		
436.cactusADM	32	263	1460	<b>263</b>	<b>1450</b>	263	1450	32	263	1460	<b>263</b>	<b>1450</b>	263	1450		
437.leslie3d	32	<b>463</b>	<b>650</b>	463	649	463	650	32	<b>463</b>	<b>650</b>	463	649	463	650		
444.namd	32	330	777	332	774	<b>330</b>	<b>777</b>	32	333	772	<b>327</b>	<b>786</b>	324	793		
447.dealII	32	<b>227</b>	<b>1610</b>	227	1620	229	1600	32	<b>227</b>	<b>1610</b>	227	1620	229	1600		
450.soplex	32	405	659	407	656	<b>405</b>	<b>658</b>	32	405	659	407	656	<b>405</b>	<b>658</b>		
453.povray	32	115	1490	114	1490	<b>115</b>	<b>1490</b>	32	96.3	1770	<b>96.1</b>	<b>1770</b>	95.6	1780		
454.calculix	32	175	1510	176	1500	<b>175</b>	<b>1510</b>	32	175	1510	176	1500	<b>175</b>	<b>1510</b>		
459.GemsFDTD	32	622	545	<b>623</b>	<b>545</b>	624	544	32	622	545	<b>623</b>	<b>545</b>	624	544		
465.tonto	32	275	1140	<b>272</b>	<b>1160</b>	265	1190	32	<b>253</b>	<b>1250</b>	252	1250	253	1240		
470.lbm	32	393	1120	394	1120	<b>394</b>	<b>1120</b>	32	393	1120	394	1120	<b>394</b>	<b>1120</b>		
481.wrf	32	312	1150	312	1150	<b>312</b>	<b>1150</b>	32	314	1140	<b>311</b>	<b>1150</b>	311	1150		
482.sphinx3	32	601	1040	<b>600</b>	<b>1040</b>	599	1040	32	601	1040	<b>600</b>	<b>1040</b>	599	1040		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2\_14.0\_aug2013/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

SPECfp\_rate2006 = 1070

SPECfp\_rate\_base2006 = 1050

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

### Platform Notes (Continued)

running on Larry-KongIVB Tue Aug 12 22:53:13 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4627 v2 @ 3.30GHz
 4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB
```

```
From /proc/meminfo
MemTotal:      529089016 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux Larry-KongIVB 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 12 16:35

```
SPEC is set to: /cpu2006.1.2_14.0_aug2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_larrykongivb-lv_root ext4 264G 100G 151G 40% /
```

```
Additional information from dmidecode:
BIOS IBM  -[KOE141AUS-1.50]- 05/03/2014
Memory:
 31x Micron 36JSF2G72PZ-1G9E1 16 GB 1867 MHz 2 rank
 16x Not Specified Not Specified
  1x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2\_14.0\_aug2013/libs/32:/cpu2006.1.2\_14.0\_aug2013/libs/64:/cpu2006.1.2\_14.0\_aug2013/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2014

**Hardware Availability:** Jun-2014

**Software Availability:** Nov-2013

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32`

`470.lbm: basepeak = yes`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Aug-2014

**Hardware Availability:** Jun-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3750 M4  
(Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1050**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Aug-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 10 16:12:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 September 2014.