



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = 101

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = 96.4

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

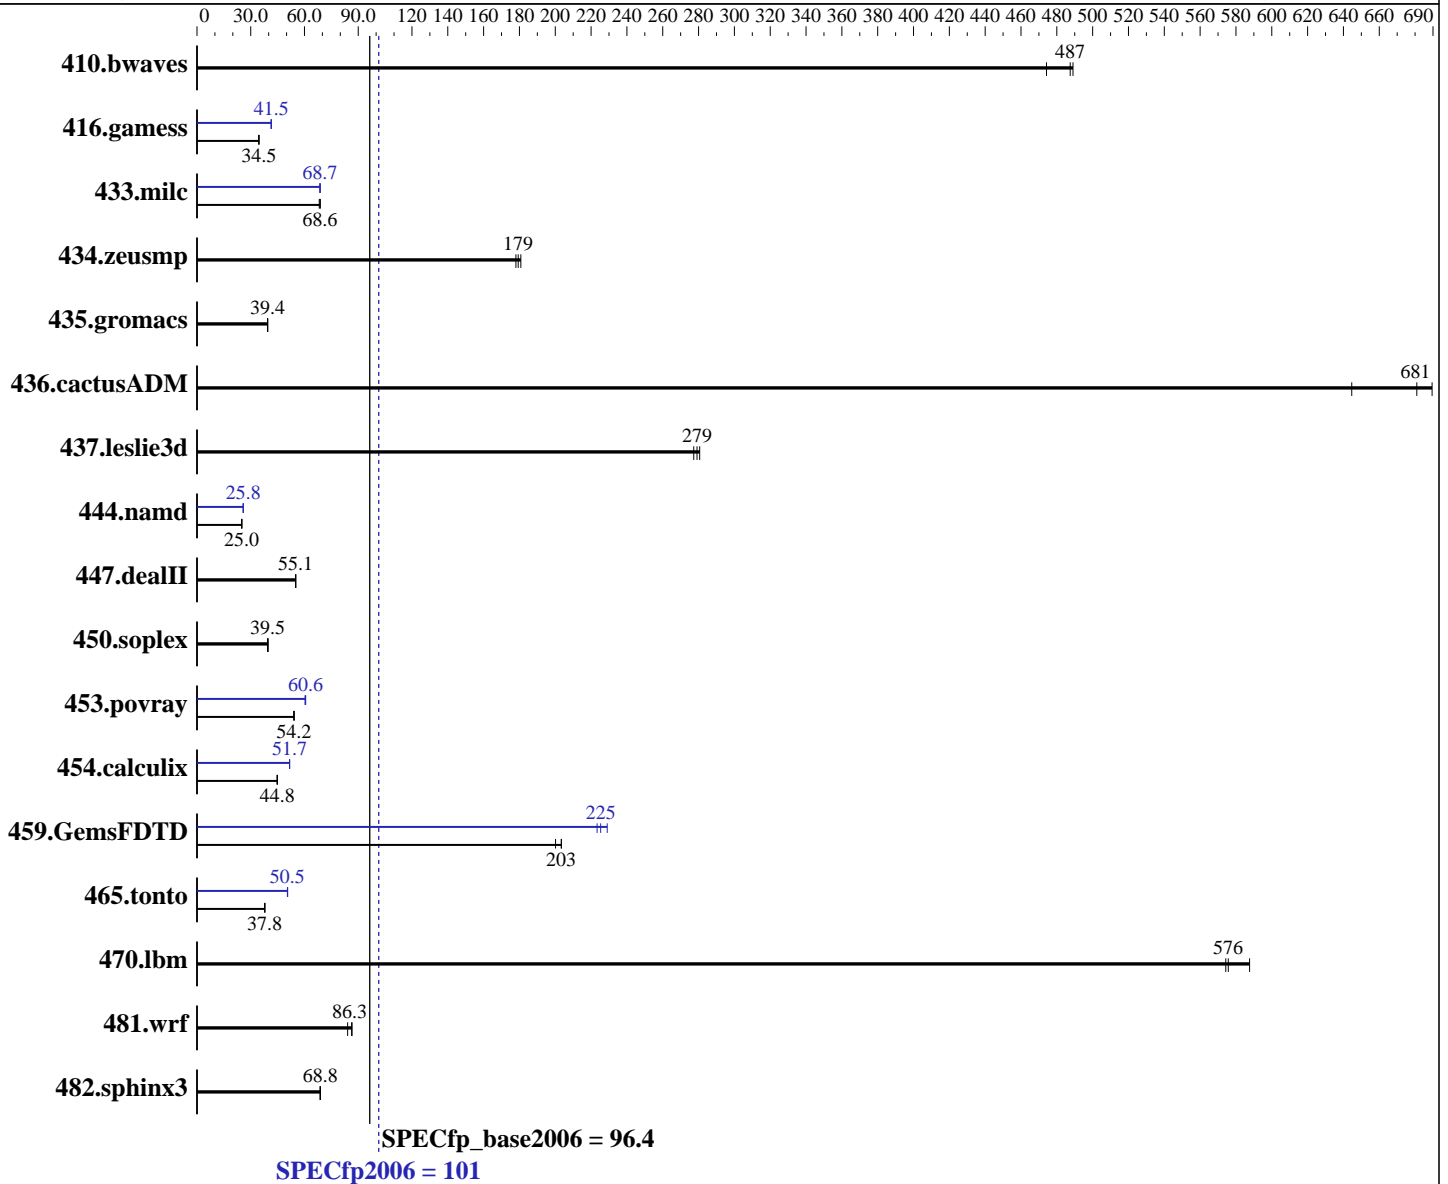

Hardware	Software
CPU Name: Intel Xeon E5-2630 v3	Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz	3.10.0-123.el7.x86_64
CPU MHz: 2400	Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
FPU: Integrated	Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip	Auto Parallel: Yes
CPU(s) orderable: 1,2 chip	File System: xfs
Primary Cache: 32 KB I + 32 KB D on chip per core	
Secondary Cache: 256 KB I+D on chip per core	
Continued on next page	Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **101**

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = **96.4**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	27.8	489	27.9	487	28.7	474	27.8	489	27.9	487	28.7	474
416.gamess	567	34.5	569	34.4	565	34.7	472	41.4	472	41.5	472	41.5
433.milc	135	68.2	134	68.6	133	68.8	134	68.7	134	68.6	133	68.8
434.zeusmp	51.1	178	50.3	181	50.8	179	51.1	178	50.3	181	50.8	179
435.gromacs	181	39.4	181	39.4	181	39.4	181	39.4	181	39.4	181	39.4
436.cactusADM	17.3	690	17.5	681	18.5	645	17.3	690	17.5	681	18.5	645
437.leslie3d	33.7	279	33.5	281	33.9	277	33.7	279	33.5	281	33.9	277
444.namd	321	25.0	321	25.0	321	25.0	311	25.8	310	25.8	311	25.8
447.dealII	208	55.1	207	55.1	208	55.1	208	55.1	207	55.1	208	55.1
450.soplex	211	39.5	210	39.7	212	39.4	211	39.5	210	39.7	212	39.4
453.povray	98.5	54.0	98.0	54.3	98.2	54.2	87.8	60.6	88.2	60.3	87.7	60.6
454.calculix	184	44.8	184	44.8	184	44.8	160	51.7	160	51.7	160	51.7
459.GemsFDTD	52.2	203	52.2	203	53.0	200	47.5	223	47.1	225	46.3	229
465.tonto	260	37.9	260	37.8	260	37.8	194	50.6	195	50.5	195	50.5
470.lbm	23.4	588	23.9	574	23.9	576	23.4	588	23.9	574	23.9	576
481.wrf	133	84.1	129	86.3	129	86.6	133	84.1	129	86.3	129	86.6
482.sphinx3	284	68.7	283	68.8	283	68.8	284	68.7	283	68.8	283	68.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Custom
 Set Snoop Mode to HS
 Set Hyper-Threading to Disabled
 Set Patrol Scrub to Disable
 Baseboard Management Controller used to adjust the fan speed to 100%
 Sysinfo program /spec14/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Thu Nov 20 08:49:06 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 101

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = 96.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2630 v3 @ 2.40GHz
 2 "physical id"s (chips)
 16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal: 263721496 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 20 08:48

SPEC is set to: /spec14

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal xfs 98G 17G 81G 18% /
```

Additional information from dmidecode:

BIOS Insyde Corp. 1.16 09/02/2014

Memory:

```
8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 101

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = 96.4

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Jun-2014

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 101

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = 96.4

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Jun-2014

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 101

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = 96.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 101

Huawei RH1288 V3 (Intel Xeon E5-2630 v3)

SPECfp_base2006 = 96.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:27:52 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.