



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = **91.5**

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = **86.3**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

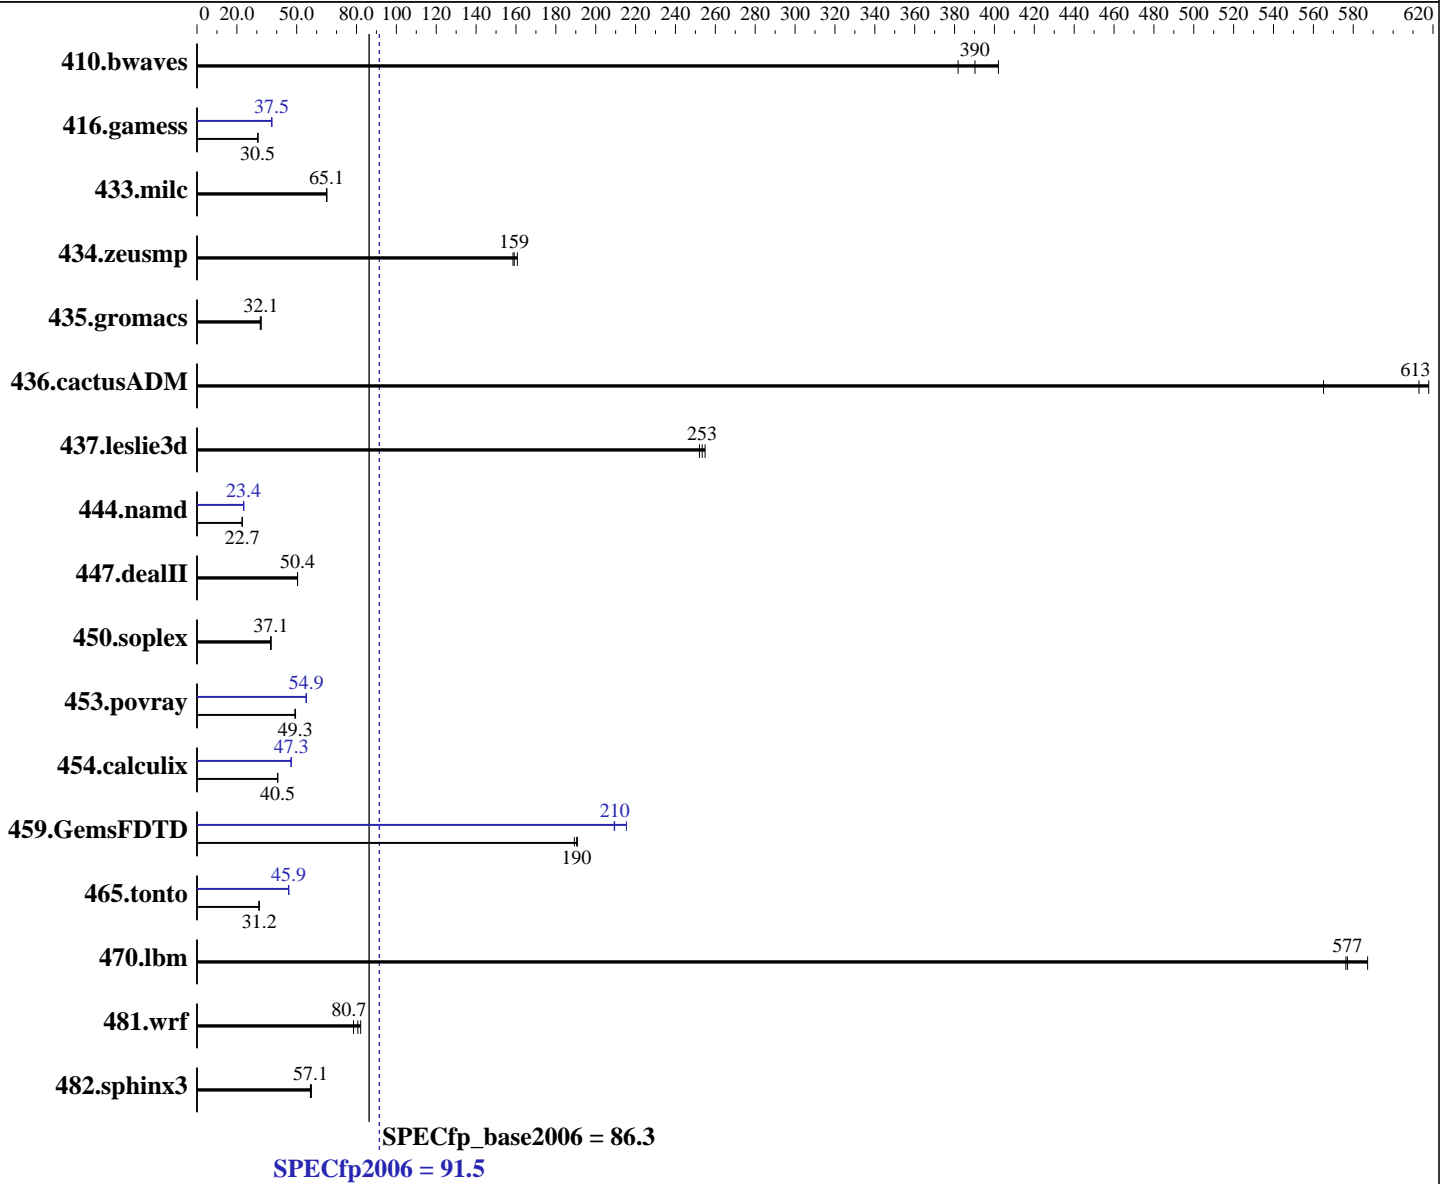

**Hardware**

CPU Name: Intel Xeon E5-2630L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **91.5**

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = **86.3**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.8	402	35.6	382	<b>34.8</b>	<b>390</b>	33.8	402	35.6	382	<b>34.8</b>	<b>390</b>
416.gamess	640	30.6	<b>642</b>	<b>30.5</b>	642	30.5	521	37.6	523	37.4	<b>523</b>	<b>37.5</b>
433.milc	<b>141</b>	<b>65.1</b>	141	64.9	141	65.1	<b>141</b>	<b>65.1</b>	141	64.9	141	65.1
434.zeusmp	<b>57.2</b>	<b>159</b>	57.4	159	56.6	161	<b>57.2</b>	<b>159</b>	57.4	159	56.6	161
435.gromacs	<b>222</b>	<b>32.1</b>	225	31.7	222	32.1	<b>222</b>	<b>32.1</b>	225	31.7	222	32.1
436.cactusADM	21.1	565	19.3	618	<b>19.5</b>	<b>613</b>	21.1	565	19.3	618	<b>19.5</b>	<b>613</b>
437.leslie3d	37.3	252	<b>37.1</b>	<b>253</b>	36.9	255	37.3	252	<b>37.1</b>	<b>253</b>	36.9	255
444.namd	<b>353</b>	<b>22.7</b>	354	22.7	353	22.7	343	23.4	<b>343</b>	<b>23.4</b>	342	23.4
447.dealII	227	50.5	<b>227</b>	<b>50.4</b>	227	50.4	227	50.5	<b>227</b>	<b>50.4</b>	227	50.4
450.soplex	226	36.9	225	37.1	<b>225</b>	<b>37.1</b>	226	36.9	225	37.1	<b>225</b>	<b>37.1</b>
453.povray	<b>108</b>	<b>49.3</b>	108	49.1	108	49.4	<b>97.0</b>	<b>54.9</b>	96.9	54.9	97.2	54.7
454.calculix	<b>204</b>	<b>40.5</b>	204	40.5	204	40.4	<b>175</b>	<b>47.3</b>	174	47.3	175	47.2
459.GemsFDTD	55.6	191	56.1	189	<b>55.7</b>	<b>190</b>	50.7	209	49.3	215	<b>50.6</b>	<b>210</b>
465.tonto	315	31.3	317	31.0	<b>315</b>	<b>31.2</b>	214	46.1	<b>214</b>	<b>45.9</b>	214	45.9
470.lbm	23.8	576	23.4	587	<b>23.8</b>	<b>577</b>	23.8	576	23.4	587	<b>23.8</b>	<b>577</b>
481.wrf	136	82.1	142	78.5	<b>138</b>	<b>80.7</b>	136	82.1	142	78.5	<b>138</b>	<b>80.7</b>
482.sphinx3	<b>342</b>	<b>57.1</b>	340	57.4	343	56.9	<b>342</b>	<b>57.1</b>	340	57.4	343	56.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Custom  
 Set Snoop Mode to HS  
 Set Hyper-Threading to Disabled  
 Set Patrol Scrub to Disable  
 Baseboard Management Controller used to adjust the fan speed to 100%  
 Sysinfo program /spec14/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on localhost.localdomain Wed Nov 26 14:16:22 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 91.5

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = 86.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz
 2 "physical id"s (chips)
 16 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal: 263721496 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 26 14:13

SPEC is set to: /spec14

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal xfs 98G 17G 81G 18% /
```

Additional information from dmidecode:

BIOS Insyde Corp. 1.16 09/02/2014

Memory:

```
8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 91.5

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = 86.3

CPU2006 license: 3175

Test date: Nov-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Jun-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 91.5

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = 86.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 91.5

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = 86.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 91.5

Huawei RH2288 V3 (Intel Xeon E5-2630L v3)

SPECfp\_base2006 = 86.3

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jun-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 27 13:27:52 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 January 2015.