



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp®_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

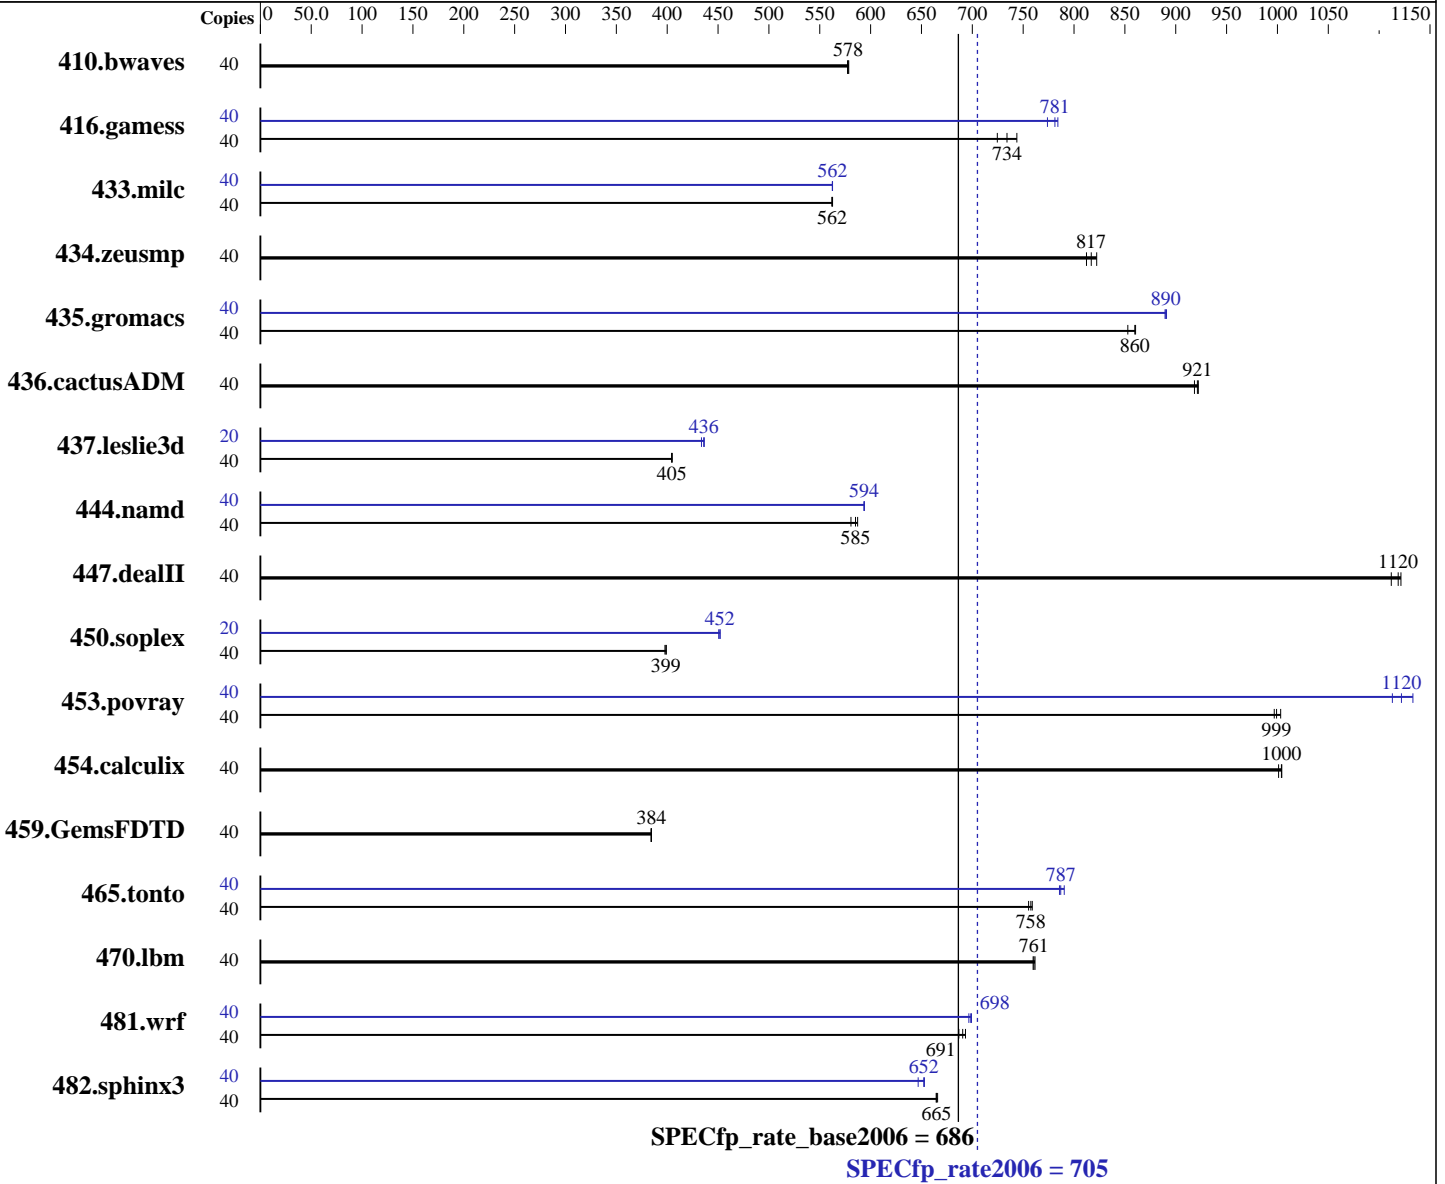

Hardware

CPU Name: Intel Xeon E5-2660 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	940	578	942	577	<u>941</u>	<u>578</u>	40	940	578	942	577	<u>941</u>	<u>578</u>
416.gamess	40	1081	725	<u>1067</u>	<u>734</u>	1053	744	40	1012	774	<u>1003</u>	<u>781</u>	999	784
433.milc	40	653	562	653	563	<u>653</u>	<u>562</u>	40	653	562	<u>653</u>	<u>562</u>	653	563
434.zeusmp	40	448	812	<u>446</u>	<u>817</u>	443	822	40	448	812	<u>446</u>	<u>817</u>	443	822
435.gromacs	40	335	853	<u>332</u>	<u>860</u>	332	861	40	321	891	321	890	<u>321</u>	<u>890</u>
436.cactusADM	40	520	918	<u>519</u>	<u>921</u>	518	922	40	520	918	<u>519</u>	<u>921</u>	518	922
437.leslie3d	40	<u>929</u>	<u>405</u>	929	405	930	404	20	433	434	<u>431</u>	<u>436</u>	431	437
444.namd	40	552	581	<u>548</u>	<u>585</u>	546	587	40	541	593	540	594	<u>540</u>	<u>594</u>
447.dealII	40	412	1110	<u>409</u>	<u>1120</u>	408	1120	40	412	1110	<u>409</u>	<u>1120</u>	408	1120
450.soplex	40	836	399	<u>837</u>	<u>399</u>	839	398	20	369	452	<u>369</u>	<u>452</u>	370	451
453.povray	40	212	1000	<u>213</u>	<u>999</u>	213	997	40	<u>190</u>	<u>1120</u>	188	1130	191	1110
454.calculix	40	329	1000	<u>329</u>	<u>1000</u>	330	1000	40	329	1000	<u>329</u>	<u>1000</u>	330	1000
459.GemsFDTD	40	<u>1104</u>	<u>384</u>	1104	385	1105	384	40	<u>1104</u>	<u>384</u>	1104	385	1105	384
465.tonto	40	519	759	<u>520</u>	<u>758</u>	521	755	40	<u>500</u>	<u>787</u>	501	786	498	790
470.lbm	40	722	762	723	760	<u>723</u>	<u>761</u>	40	722	762	723	760	<u>723</u>	<u>761</u>
481.wrf	40	<u>647</u>	<u>691</u>	644	693	651	687	40	641	697	639	699	<u>640</u>	<u>698</u>
482.sphinx3	40	<u>1173</u>	<u>665</u>	1171	666	1173	665	40	1205	647	1194	653	<u>1195</u>	<u>652</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Cluster On Die set to Enabled
Early Snoop set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

Platform Notes (Continued)

Performance Profile set to Custom
 ClE Support set to Disabled
 Core C3 set to Disabled
 Core C6 set to Disabled
 Thermal Profile set to High Fan Speed
 Memory Power Savings set to Disabled
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on RD550 Tue Nov 4 21:35:19 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB
```

```
From /proc/meminfo
MemTotal:      264412180 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RD550 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 4 21:34

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  730G   56G  637G   9% /
```

Additional information from dmidecode:
 BIOS LENOVO PB1TS110 10/06/2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 705

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Sep-2014

Tested by: Lenovo Group Limited

Software Availability: Jan-2014

Platform Notes (Continued)

Memory:

16x 16 GB

8x NO DIMM NO DIMM

16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)

RD550 support 4 channels and 12 DIMMs per processor, total 8 channels and 24 DIMMs. 16 DIMM slots installed with 16 GB DIMM for this run.

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

482.sphinx3: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD550-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-RD550-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD550 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp_rate2006 = 705

SPECfp_rate_base2006 = 686

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Jan-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:31:28 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.