



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint®\_rate2006 = 1390**

PRIMERGY CX2550 M1, Intel Xeon E5-2699 v3, 2.3 GHz

**SPECint\_rate\_base2006 = 1350**

CPU2006 license: 19


Test date: Nov-2014

Test sponsor: Fujitsu

Hardware Availability: Sep-2014

Tested by: Fujitsu

Software Availability: Nov-2013

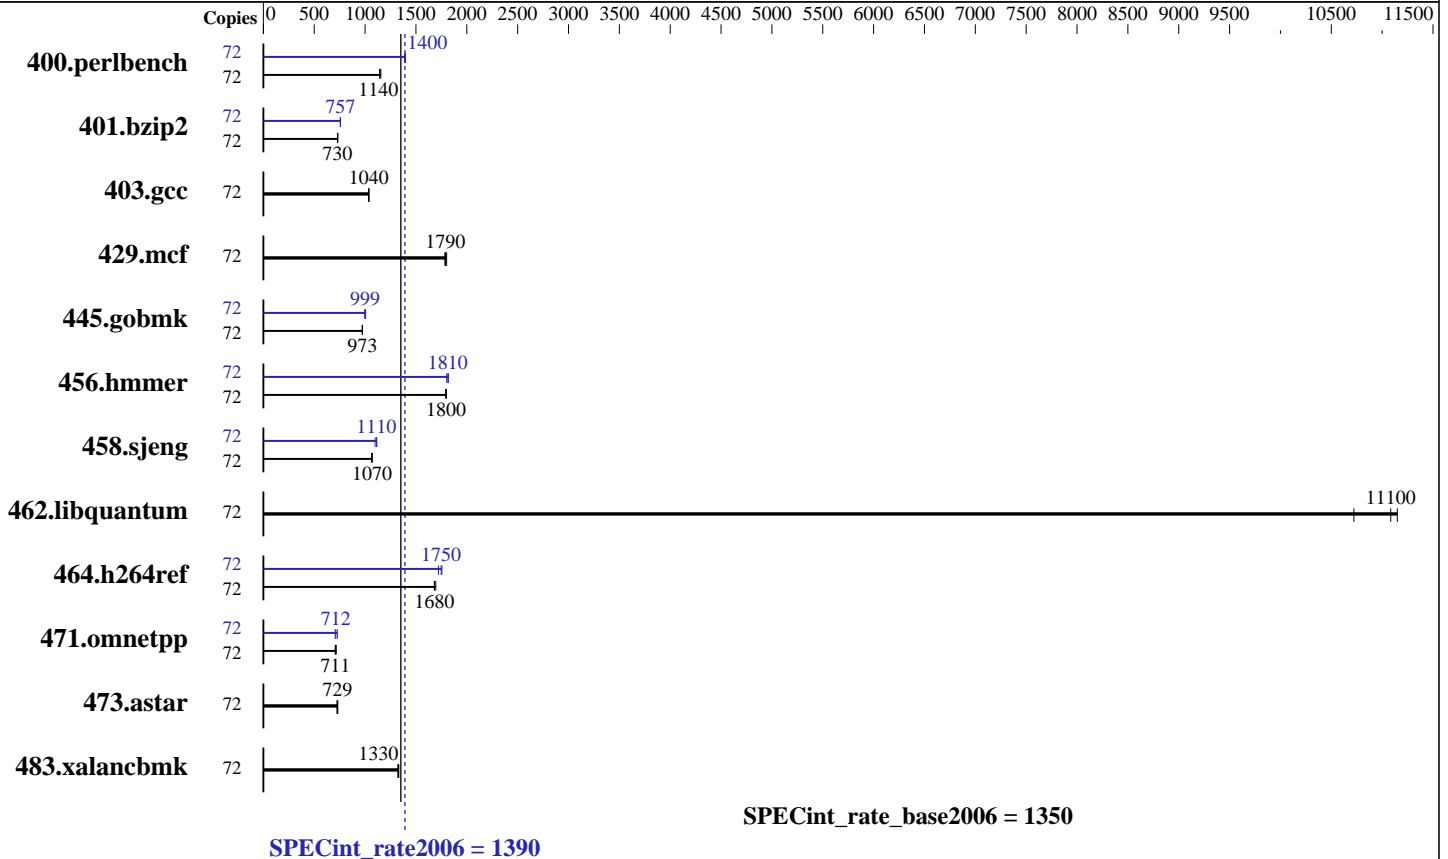

**Hardware**

CPU Name: Intel Xeon E5-2699 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.23.3.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 1390

PRIMERGY CX2550 M1, Intel Xeon E5-2699 v3, 2.3 GHz

SPECint\_rate\_base2006 = 1350

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Nov-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	615	1140	<b>614</b>	<b>1140</b>	609	1150	72	504	1400	<b>504</b>	<b>1400</b>	507	1390
401.bzip2	72	953	729	<b>952</b>	<b>730</b>	949	732	72	917	758	<b>918</b>	<b>757</b>	918	756
403.gcc	72	560	1040	<b>559</b>	<b>1040</b>	559	1040	72	560	1040	<b>559</b>	<b>1040</b>	559	1040
429.mcf	72	364	1800	<b>367</b>	<b>1790</b>	368	1780	72	364	1800	<b>367</b>	<b>1790</b>	368	1780
445.gobmk	72	<b>776</b>	<b>973</b>	775	974	777	973	72	<b>756</b>	<b>999</b>	751	1010	757	998
456.hammer	72	373	1800	375	1790	<b>374</b>	<b>1800</b>	72	<b>370</b>	<b>1810</b>	369	1820	373	1800
458.sjeng	72	814	1070	819	1060	<b>816</b>	<b>1070</b>	72	793	1100	781	1120	<b>784</b>	<b>1110</b>
462.libquantum	72	139	10700	134	11100	<b>135</b>	<b>11100</b>	72	139	10700	134	11100	<b>135</b>	<b>11100</b>
464.h264ref	72	940	1700	<b>947</b>	<b>1680</b>	948	1680	72	<b>912</b>	<b>1750</b>	908	1760	926	1720
471.omnetpp	72	<b>633</b>	<b>711</b>	628	716	637	706	72	637	707	<b>632</b>	<b>712</b>	619	727
473.astar	72	<b>693</b>	<b>729</b>	699	723	691	731	72	<b>693</b>	<b>729</b>	699	723	691	731
483.xalancbmk	72	376	1320	<b>374</b>	<b>1330</b>	373	1330	72	376	1320	<b>374</b>	<b>1330</b>	373	1330

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced  
QPI snoop mode: Cluster on Die  
COD Enable = Enabled, Early Snoop = Disabled  
CPU C1E Support = Disabled  
QPI Link Frequency Select = 6.4 GT/s

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1390**

PRIMERGY CX2550 M1, Intel Xeon E5-2699 v3, 2.3 GHz

**SPECint\_rate\_base2006 = 1350**

**CPU2006 license:** 19

**Test date:** Nov-2014

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2014

**Tested by:** Fujitsu

**Software Availability:** Nov-2013

## General Notes (Continued)

```

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

This result was measured on the PRIMERGY CX2550 M1. The PRIMERGY CX2550 M1 and the PRIMERGY CX2570 M1 are electronically equivalent. For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

```

C benchmarks:
  icc -m32

C++ benchmarks:
  icpc -m32

```

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Base Optimization Flags

```

C benchmarks:
  -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
  -opt-mem-layout-trans=3

C++ benchmarks:
  -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
  -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

```

## Base Other Flags

```

C benchmarks:
  403.gcc: -Dalloca=_alloca

```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1390**

PRIMERGY CX2550 M1, Intel Xeon E5-2699 v3, 2.3 GHz

**SPECint\_rate\_base2006 = 1350**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1390**

PRIMERGY CX2550 M1, Intel Xeon E5-2699 v3, 2.3 GHz

**SPECint\_rate\_base2006 = 1350**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 27 13:33:40 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 January 2015.