



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2420 v2, 2.20 GHz)

SPECint®\_rate2006 = 431

SPECint\_rate\_base2006 = 410

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2015

Hardware Availability: Feb-2014

Software Availability: Sep-2014

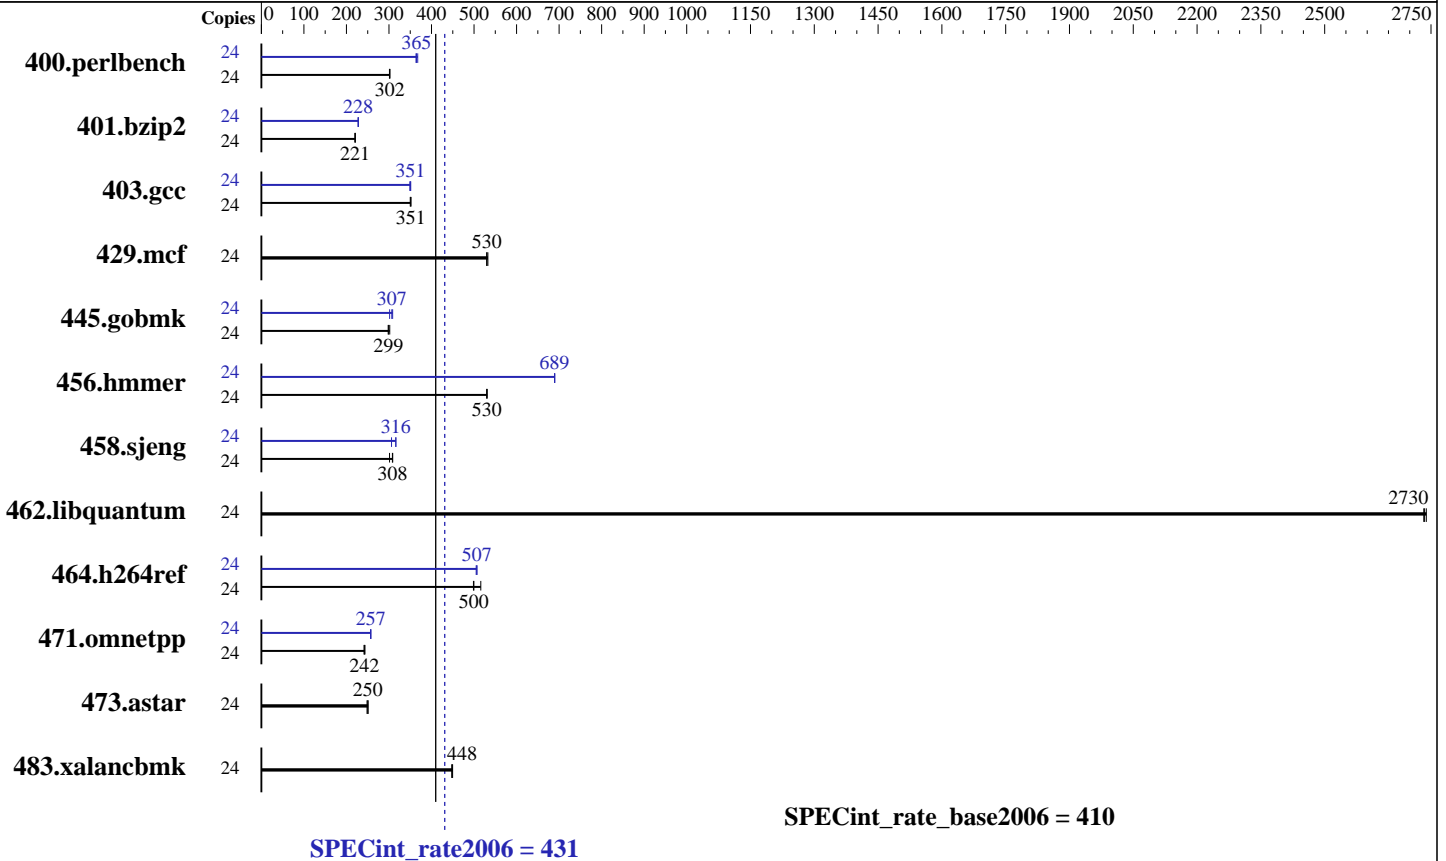

### Hardware

CPU Name: Intel Xeon E5-2420 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL7)  
 Disk Subsystem: 1 x 400 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 431

Lenovo ThinkServer TD340 (Intel Xeon E5-2420 v2, 2.20 GHz)

SPECint\_rate\_base2006 = 410

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Feb-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>777</u>	<u>302</u>	779	301	776	302	24	<u>643</u>	<u>365</u>	638	368	645	364
401.bzip2	24	1049	221	1053	220	<u>1050</u>	<u>221</u>	24	1017	228	1016	228	<u>1017</u>	<u>228</u>
403.gcc	24	552	350	550	352	<u>550</u>	<u>351</u>	24	<u>551</u>	<u>351</u>	554	349	550	351
429.mcf	24	411	533	<u>413</u>	<u>530</u>	413	530	24	411	533	<u>413</u>	<u>530</u>	413	530
445.gobmk	24	844	298	834	302	<u>841</u>	<u>299</u>	24	816	309	835	302	<u>821</u>	<u>307</u>
456.hammer	24	<u>422</u>	<u>530</u>	423	530	422	531	24	325	689	325	690	<u>325</u>	<u>689</u>
458.sjeng	24	<u>943</u>	<u>308</u>	940	309	964	301	24	<u>919</u>	<u>316</u>	918	316	949	306
462.libquantum	24	<u>182</u>	<u>2730</u>	182	2740	182	2730	24	<u>182</u>	<u>2730</u>	182	2740	182	2730
464.h264ref	24	<u>1063</u>	<u>500</u>	1030	516	1065	499	24	1052	505	<u>1049</u>	<u>507</u>	1048	507
471.omnetpp	24	621	241	616	244	<u>619</u>	<u>242</u>	24	<u>583</u>	<u>257</u>	583	257	584	257
473.astar	24	<u>674</u>	<u>250</u>	671	251	678	248	24	<u>674</u>	<u>250</u>	671	251	678	248
483.xalancbmk	24	<u>369</u>	<u>448</u>	368	450	370	448	24	<u>369</u>	<u>448</u>	368	450	370	448

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```

BIOS configuration
ClE Support set to Disabled
CPU C6 report set to Disabled
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on TD340 Sat Jan 10 00:39:12 2015

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2420 v2 @ 2.20GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page

```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 431

Lenovo ThinkServer TD340 (Intel Xeon E5-2420 v2, 2.20 GHz)

SPECint\_rate\_base2006 = 410

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Feb-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

```

caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      197887584 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

```

```

uname -a:
Linux TD340 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Jan 10 00:01

```

SPEC is set to: /usr/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2       xfs       369G      9.8G  359G   3% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS LENOVO A3TS80A 10/16/2014
Memory:
12x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1600 MHz

```

(End of data from sysinfo program)  
TD340 support 3 channels and 6 DIMMs per processor, total 6 channels and 12 DIMMs. All 12 DIMM slots installed with 16 GB DIMM for this run.



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 431**

Lenovo ThinkServer TD340 (Intel Xeon E5-2420 v2,  
2.20 GHz)

**SPECint\_rate\_base2006 = 410**

**CPU2006 license:** 9017

**Test date:** Jan-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB  
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
```

```
-L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD340 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECint\_rate2006 = 431**

**SPECint\_rate\_base2006 = 410**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jan-2015

**Hardware Availability:** Feb-2014

**Software Availability:** Sep-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 431**

Lenovo ThinkServer TD340 (Intel Xeon E5-2420 v2, 2.20 GHz)

**SPECint\_rate\_base2006 = 410**

**CPU2006 license:** 9017

**Test date:** Jan-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Feb-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-TD340-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-TD340-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 27 13:34:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 January 2015.