



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp®\_rate2006 = 892**

PRIMERGY CX2570 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate\_base2006 = 865**

CPU2006 license: 19


Test date: Nov-2014

Test sponsor: Fujitsu

Hardware Availability: Sep-2014

Tested by: Fujitsu

Software Availability: Sep-2014

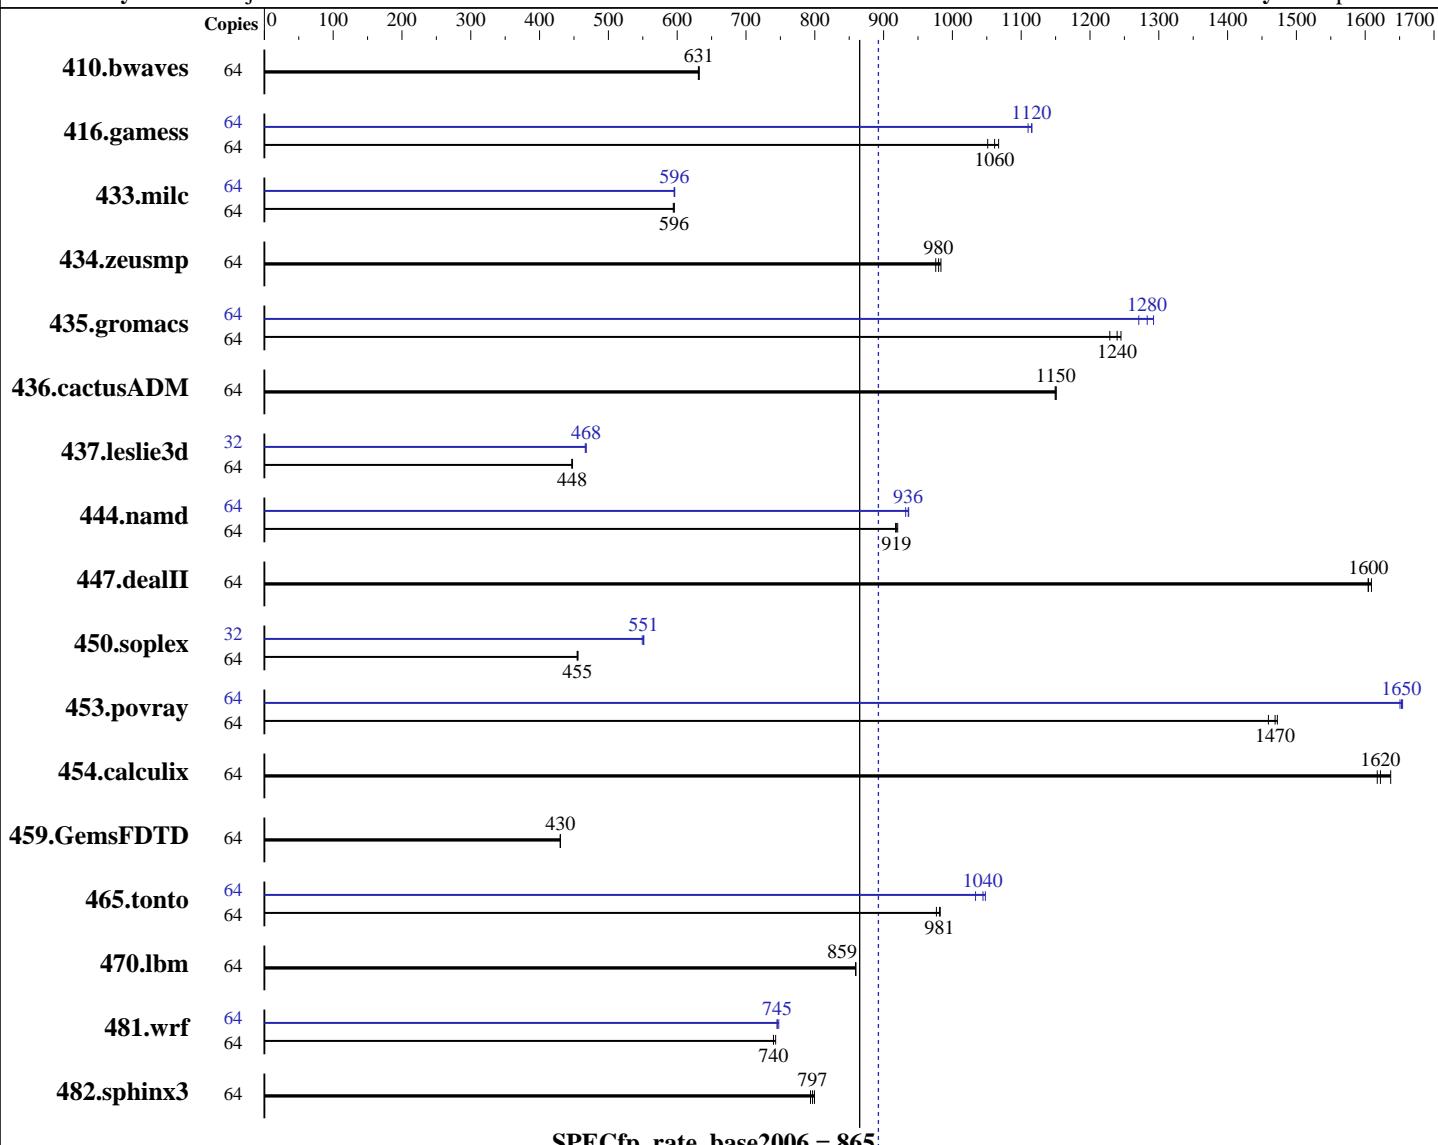

### Hardware

CPU Name: Intel Xeon E5-2698 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: Kernel 3.10.0-123.8.1.el7.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY CX2570 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate2006 = 892**

**SPECfp\_rate\_base2006 = 865**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

L3 Cache: 40 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1379	631	1376	632	<b>1377</b>	<b>631</b>	64	1379	631	1376	632	<b>1377</b>	<b>631</b>
416.gamess	64	<b>1181</b>	<b>1060</b>	1192	1050	1174	1070	64	1129	1110	1123	1120	<b>1124</b>	<b>1120</b>
433.milc	64	986	596	<b>986</b>	<b>596</b>	989	594	64	987	596	985	596	<b>985</b>	<b>596</b>
434.zeusmp	64	597	976	592	983	<b>594</b>	<b>980</b>	64	597	976	592	983	<b>594</b>	<b>980</b>
435.gromacs	64	<b>369</b>	<b>1240</b>	372	1230	367	1250	64	354	1290	360	1270	<b>356</b>	<b>1280</b>
436.cactusADM	64	665	1150	665	1150	<b>665</b>	<b>1150</b>	64	665	1150	665	1150	<b>665</b>	<b>1150</b>
437.leslie3d	64	1346	447	<b>1344</b>	<b>448</b>	1343	448	32	643	468	<b>643</b>	<b>468</b>	645	466
444.namd	64	558	921	<b>559</b>	<b>919</b>	560	917	64	551	932	548	936	<b>548</b>	<b>936</b>
447.dealII	64	<b>456</b>	<b>1600</b>	455	1610	456	1600	64	<b>456</b>	<b>1600</b>	455	1610	456	1600
450.soplex	64	1171	456	1174	455	<b>1172</b>	<b>455</b>	32	486	549	484	551	<b>484</b>	<b>551</b>
453.povray	64	233	1460	<b>232</b>	<b>1470</b>	231	1470	64	206	1650	206	1650	<b>206</b>	<b>1650</b>
454.calculix	64	<b>325</b>	<b>1620</b>	323	1640	326	1620	64	<b>325</b>	<b>1620</b>	323	1640	326	1620
459.GemsFDTD	64	<b>1578</b>	<b>430</b>	1580	430	1578	430	64	<b>1578</b>	<b>430</b>	1580	430	1578	430
465.tonto	64	641	982	<b>642</b>	<b>981</b>	645	977	64	<b>603</b>	<b>1040</b>	609	1030	601	1050
470.lbm	64	<b>1023</b>	<b>859</b>	1023	860	1023	859	64	<b>1023</b>	<b>859</b>	1023	860	1023	859
481.wrf	64	966	740	<b>966</b>	<b>740</b>	962	743	64	956	748	959	745	<b>959</b>	<b>745</b>
482.sphinx3	64	1571	794	<b>1566</b>	<b>797</b>	1560	800	64	<b>1571</b>	<b>794</b>	<b>1566</b>	<b>797</b>	1560	800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Energy Performance = Performance  
 Utilization Profile = Unbalanced

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2570 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate2006 = 892**

**SPECfp\_rate\_base2006 = 865**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

QPI snoop mode: Cluster on Die  
COD Enable = Enabled, Early Snoop = Disabled  
CPU C1E Support = Disabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

This result was measured on the PRIMERGY CX2550 M1. The PRIMERGY CX2550 M1 and the PRIMERGY CX2570 M1 are electronically equivalent.

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2570 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate2006 = 892**

**SPECfp\_rate\_base2006 = 865**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

```
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2570 M1, Intel Xeon E5-2698 v3, 2.3 GHz

**SPECfp\_rate2006 = 892**

**SPECfp\_rate\_base2006 = 865**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Nov-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -auto-ilp32
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2570 M1, Intel Xeon E5-2698 v3, 2.3 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

**SPECfp\_rate2006 = 892**

**SPECfp\_rate\_base2006 = 865**

Test date: Nov-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
             -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 10 18:31:26 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 February 2015.