



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp®\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

CPU2006 license: 11


Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Jan-2015

Hardware Availability: Dec-2014

Software Availability: Nov-2013

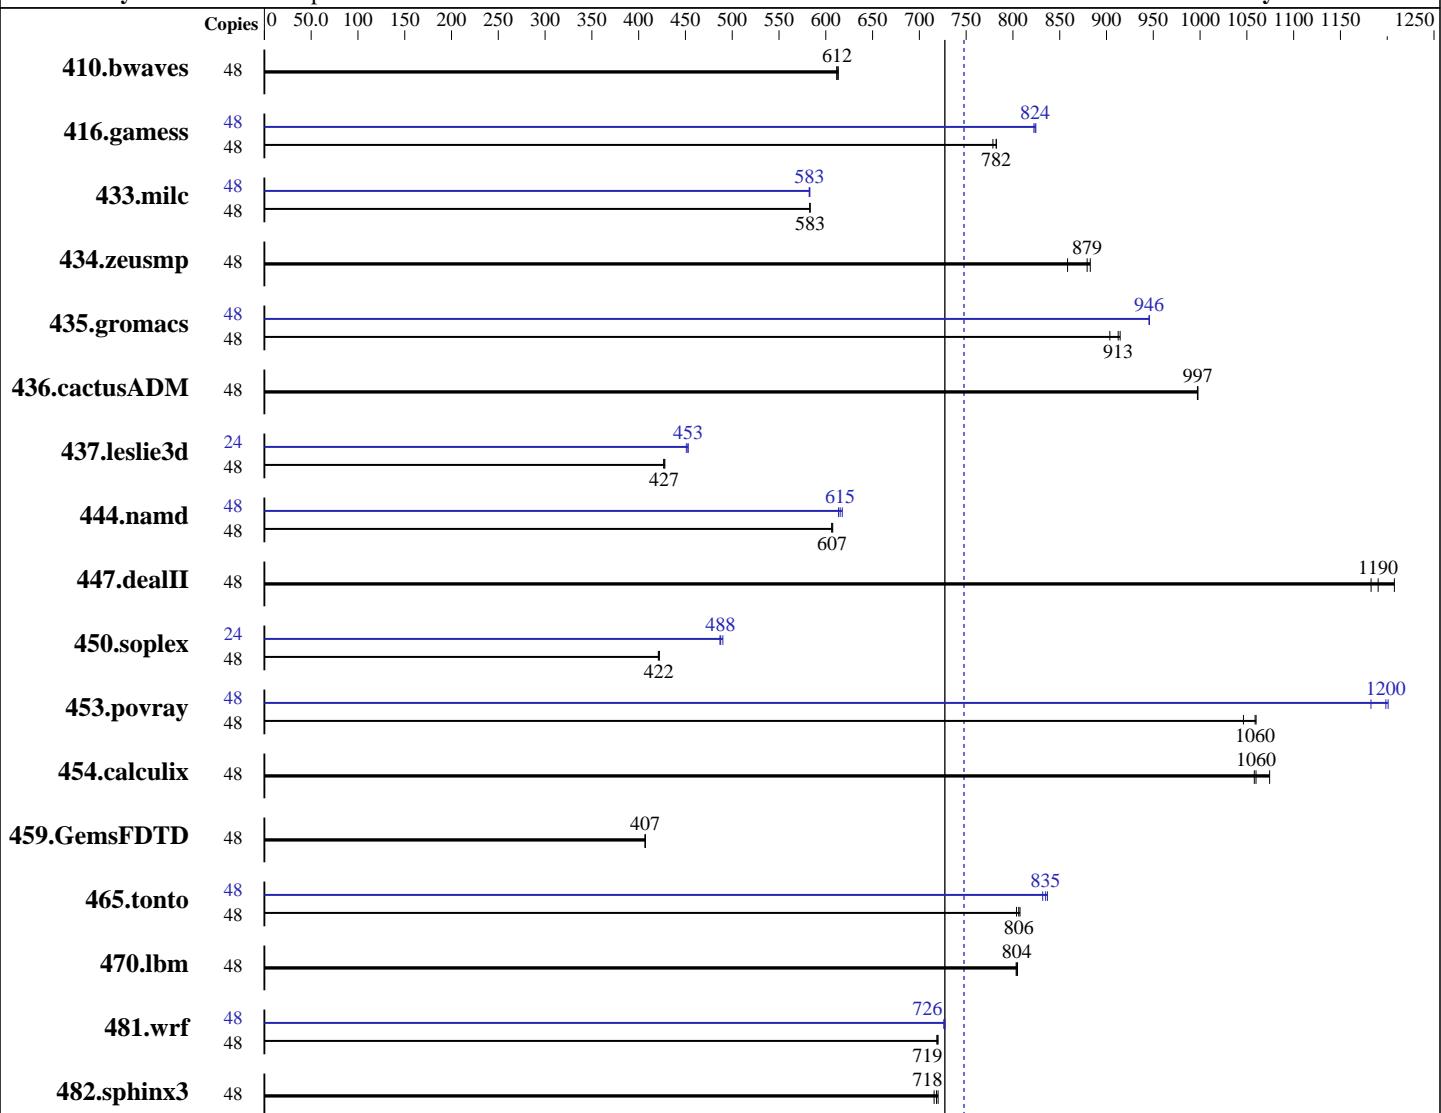

**SPECfp\_rate\_base2006 = 727**

**SPECfp\_rate2006 = 748**

### Hardware

CPU Name: Intel Xeon E5-2658 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: 2.6.32-424.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

CPU2006 license: 11

Test sponsor: Lenovo Group Limited

Tested by: IBM Corporation

Test date: Jan-2015

Hardware Availability: Dec-2014

Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 1 TB SAS, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	<b>1065</b>	<b>612</b>	1063	613	1066	612	48	<b>1065</b>	<b>612</b>	1063	613	1066	612
416.gamess	48	1202	782	1207	779	<b>1202</b>	<b>782</b>	48	1143	822	<b>1141</b>	<b>824</b>	1140	824
433.milc	48	756	583	<b>756</b>	<b>583</b>	756	583	48	<b>757</b>	<b>582</b>	756	583	<b>756</b>	<b>583</b>
434.zeusmp	48	495	883	509	858	<b>497</b>	<b>879</b>	48	495	883	509	858	<b>497</b>	<b>879</b>
435.gromacs	48	379	904	<b>376</b>	<b>913</b>	375	915	48	362	945	<b>362</b>	<b>946</b>	362	946
436.cactusADM	48	<b>575</b>	<b>997</b>	575	997	575	998	48	<b>575</b>	<b>997</b>	575	997	<b>575</b>	998
437.leslie3d	48	1057	427	<b>1056</b>	<b>427</b>	1054	428	24	498	453	500	451	<b>498</b>	<b>453</b>
444.namd	48	635	606	634	607	<b>635</b>	<b>607</b>	48	627	614	623	618	<b>626</b>	<b>615</b>
447.dealII	48	464	1180	455	1210	<b>461</b>	<b>1190</b>	48	464	1180	455	1210	<b>461</b>	<b>1190</b>
450.soplex	48	<b>949</b>	<b>422</b>	951	421	948	422	24	409	490	<b>410</b>	<b>488</b>	411	487
453.povray	48	244	1050	<b>241</b>	<b>1060</b>	241	1060	48	213	1200	<b>213</b>	<b>1200</b>	216	1180
454.calculix	48	369	1070	374	1060	<b>374</b>	<b>1060</b>	48	369	1070	374	1060	<b>374</b>	<b>1060</b>
459.GemsFDTD	48	1251	407	1252	407	<b>1251</b>	<b>407</b>	48	1251	407	1252	407	<b>1251</b>	<b>407</b>
465.tonto	48	<b>586</b>	<b>806</b>	588	804	585	808	48	568	832	<b>566</b>	<b>835</b>	564	837
470.lbm	48	821	803	<b>820</b>	<b>804</b>	819	805	48	821	803	<b>820</b>	<b>804</b>	819	805
481.wrf	48	745	720	746	719	<b>745</b>	<b>719</b>	48	<b>738</b>	<b>726</b>	738	726	737	727
482.sphinx3	48	1307	716	1299	720	<b>1302</b>	<b>718</b>	48	1307	716	1299	720	<b>1302</b>	<b>718</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Fan speed set to 100%  
Operating Mode set to Maximum Performance in BIOS  
Enable COD Preference in BIOS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

**CPU2006 license:** 11

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Jan-2015

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2013

## Platform Notes (Continued)

Disable Early Snoop Preference in BIOS

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on Bonneville-SPECCpu Thu Jan 22 09:49:46 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2658 v3 @ 2.20GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 kB
```

From /proc/meminfo

```
MemTotal:      264119260 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux Bonneville-SPECCpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 21 14:45 last=5

SPEC is set to: /cpu2006.1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/vg_bonnevillespe-lv_root	ext4	356G	14G	324G	4%	/

Additional information from dmidecode:

```
BIOS IBM -[C4E103EUS-1.00]- 11/25/2014
Memory:
 8x NO DIMM Unknown
 16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

**CPU2006 license:** 11

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Jan-2015

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

**CPU2006 license:** 11

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Jan-2015

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2013

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

**CPU2006 license:** 11

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Jan-2015

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2013

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

IBM Flex System x240 M5  
(Intel Xeon E5-2658 v3, 2.20 GHz)

**SPECfp\_rate2006 = 748**

**SPECfp\_rate\_base2006 = 727**

**CPU2006 license:** 11

**Test sponsor:** Lenovo Group Limited

**Tested by:** IBM Corporation

**Test date:** Jan-2015

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.20141021.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.20141021.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:37:03 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 February 2015.