



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp®2006 = 78.3

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_base2006 = 77.0

CPU2006 license: 9017


Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

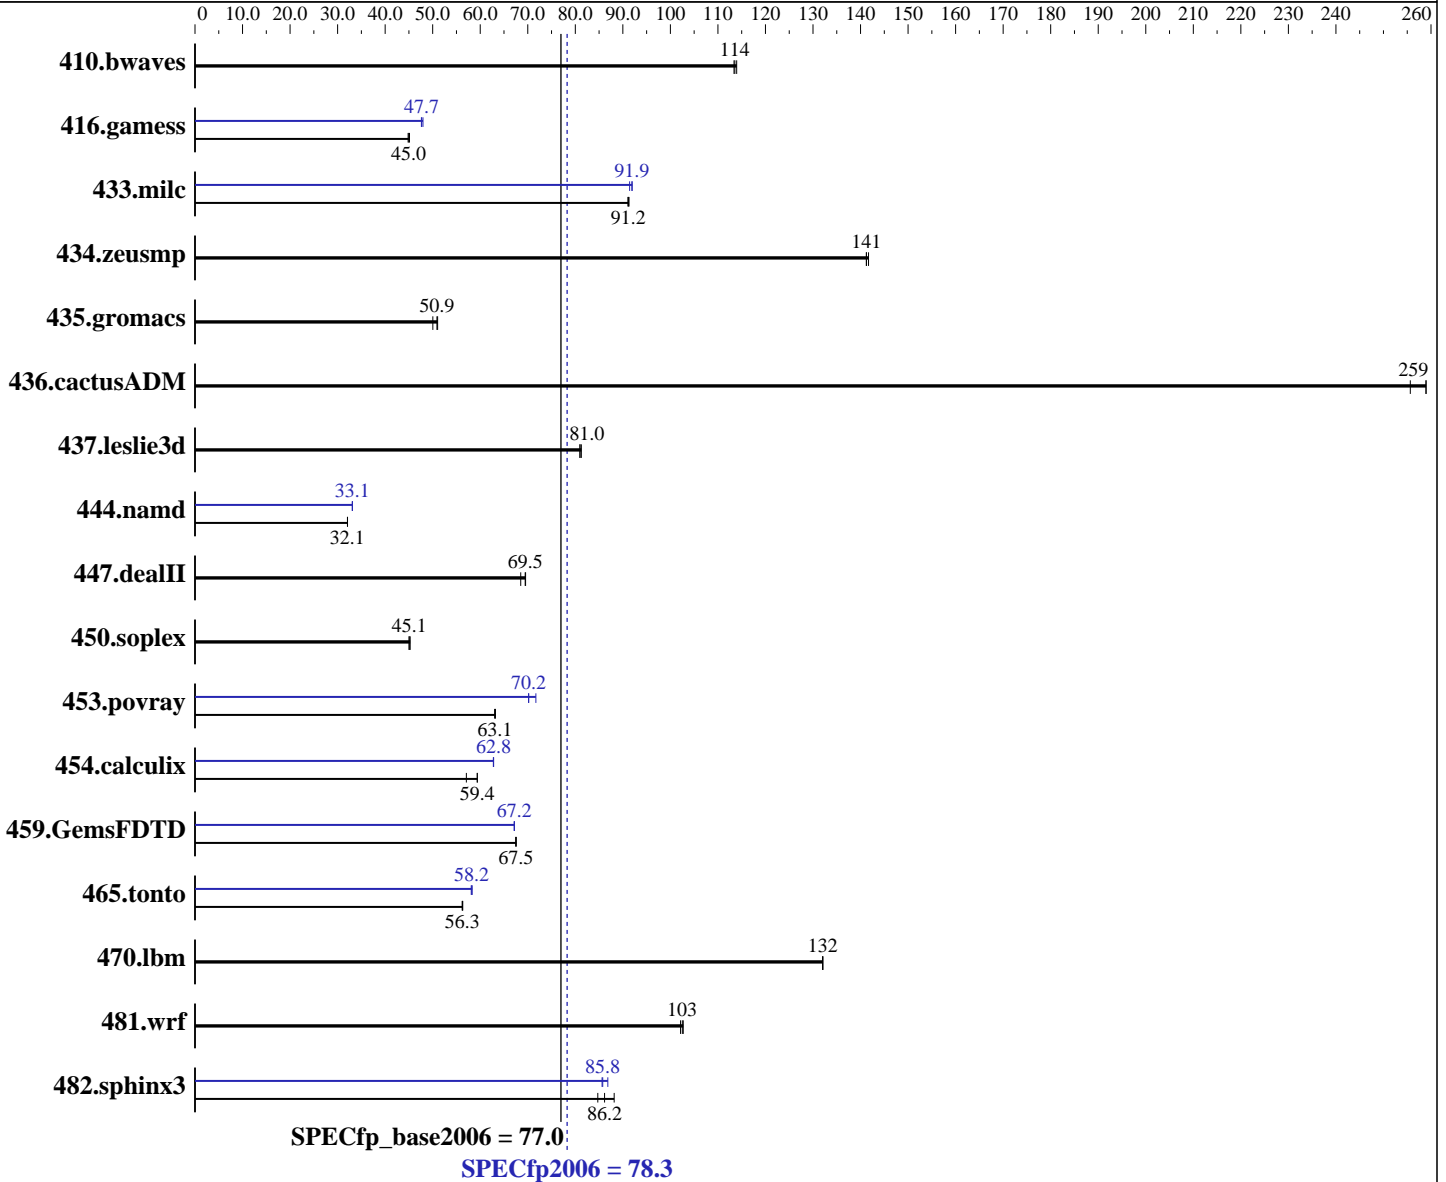

### Hardware

CPU Name: Intel Xeon E3-1286 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp2006 = **78.3**

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_base2006 = **77.0**

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800U-13)  
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	120	113	119	114	<b><u>120</u></b>	<b><u>114</u></b>	120	113	119	114	<b><u>120</u></b>	<b><u>114</u></b>
416.gamess	437	44.8	<b><u>435</u></b>	<b><u>45.0</u></b>	434	45.1	411	47.6	<b><u>411</u></b>	<b><u>47.7</u></b>	408	48.0
433.milc	<b><u>101</u></b>	<b><u>91.2</u></b>	101	91.3	101	91.1	<b><u>99.9</u></b>	<b><u>91.9</u></b>	100	91.4	99.8	92.0
434.zeusmp	<b><u>64.4</u></b>	<b><u>141</u></b>	64.4	141	64.2	142	<b><u>64.4</u></b>	<b><u>141</u></b>	64.4	141	64.2	142
435.gromacs	<b><u>140</u></b>	<b><u>50.9</u></b>	143	50.0	140	51.0	<b><u>140</u></b>	<b><u>50.9</u></b>	143	50.0	140	51.0
436.cactusADM	46.7	256	<b><u>46.1</u></b>	<b><u>259</u></b>	46.1	259	46.7	256	<b><u>46.1</u></b>	<b><u>259</u></b>	46.1	259
437.leslie3d	116	81.3	116	81.0	<b><u>116</u></b>	<b><u>81.0</u></b>	116	81.3	116	81.0	<b><u>116</u></b>	<b><u>81.0</u></b>
444.namd	<b><u>250</u></b>	<b><u>32.1</u></b>	250	32.1	250	32.1	<b><u>242</u></b>	<b><u>33.1</u></b>	242	33.1	242	33.1
447.dealII	167	68.5	<b><u>165</u></b>	<b><u>69.5</u></b>	165	69.5	167	68.5	<b><u>165</u></b>	<b><u>69.5</u></b>	165	69.5
450.soplex	185	45.0	<b><u>185</u></b>	<b><u>45.1</u></b>	184	45.3	185	45.0	<b><u>185</u></b>	<b><u>45.1</u></b>	184	45.3
453.povray	<b><u>84.3</u></b>	<b><u>63.1</u></b>	84.2	63.2	84.4	63.0	74.2	71.7	75.8	70.2	<b><u>75.8</u></b>	<b><u>70.2</u></b>
454.calculix	139	59.4	<b><u>139</u></b>	<b><u>59.4</u></b>	145	57.1	131	62.8	131	62.8	<b><u>131</u></b>	<b><u>62.8</u></b>
459.GemsFDTD	<b><u>157</u></b>	<b><u>67.5</u></b>	157	67.5	157	67.6	158	67.2	158	67.2	<b><u>158</u></b>	<b><u>67.2</u></b>
465.tonto	175	56.2	<b><u>175</u></b>	<b><u>56.3</u></b>	175	56.3	<b><u>169</u></b>	<b><u>58.2</u></b>	169	58.3	169	58.1
470.lbm	104	132	<b><u>104</u></b>	<b><u>132</u></b>	104	132	104	132	<b><u>104</u></b>	<b><u>132</u></b>	104	132
481.wrf	109	103	109	102	<b><u>109</u></b>	<b><u>103</u></b>	109	103	109	102	<b><u>109</u></b>	<b><u>103</u></b>
482.sphinx3	<b><u>226</u></b>	<b><u>86.2</u></b>	230	84.7	221	88.2	<b><u>227</u></b>	<b><u>85.8</u></b>	228	85.6	224	86.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPEC\_ic14/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Fri Jan 30 02:34:48 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp2006 = 78.3**

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

**SPECfp\_base2006 = 77.0**

**CPU2006 license:** 9017

**Test date:** Jan-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

### Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E3-1286 v3 @ 3.70GHz
    1 "physical id"s (chips)
    8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 8192 KB

From /proc/meminfo
MemTotal:      16165980 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 28 19:44

SPEC is set to: /home/SPEC_ic14
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_home ext4      860G      22G  795G   3% /home

Additional information from dmidecode:
BIOS IBM  -[JUE115CUS-1.06]- 11/11/2014
Memory:
  4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

### General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/SPEC_ic14/libs/32:/home/SPEC_ic14/libs/64:/home/SPEC_ic14/sh"
OMP_NUM_THREADS = "4"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 78.3

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

SPECfp\_base2006 = 77.0

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

## General Notes (Continued)

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp2006 = 78.3**

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

**SPECfp\_base2006 = 77.0**

**CPU2006 license:** 9017

**Test date:** Jan-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp2006 = 78.3**

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

**SPECfp\_base2006 = 77.0**

**CPU2006 license:** 9017

**Test date:** Jan-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jul-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-A.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

Lenovo System x3250 M5  
(Intel Xeon E3-1286 v3, 3.70 GHz)

**SPECfp2006 = 78.3**

**SPECfp\_base2006 = 77.0**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jan-2015

**Hardware Availability:** Jul-2014

**Software Availability:** Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Feb 25 11:29:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 February 2015.