



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp®_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2015

Hardware Availability: Jul-2014

Software Availability: Nov-2013

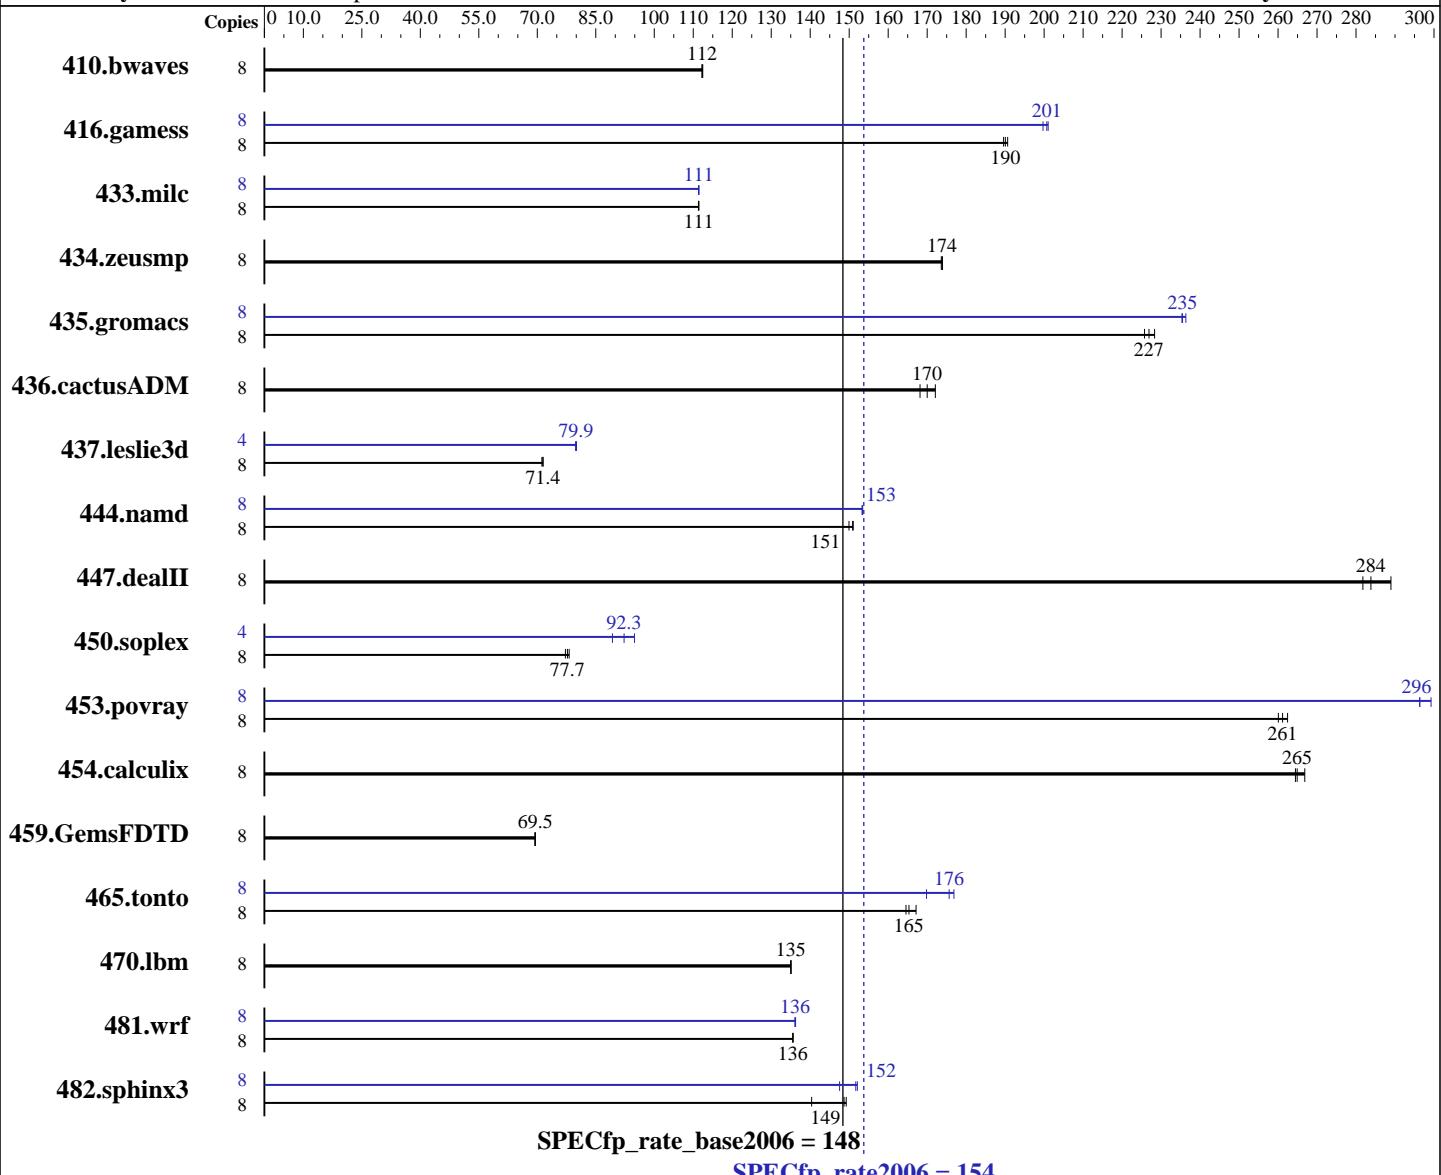

Hardware

CPU Name: Intel Xeon E3-1285 v3
CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz: 3600
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 PC3-12800U-13)
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	969	112	967	112	968	112	8	969	112	967	112	968	112
416.gamess	8	824	190	826	190	822	191	8	781	201	779	201	784	200
433.milc	8	659	111	660	111	659	111	8	659	111	659	111	659	111
434.zeusmp	8	419	174	419	174	419	174	8	419	174	419	174	419	174
435.gromacs	8	252	227	250	228	253	226	8	243	235	242	236	243	235
436.cactusADM	8	556	172	562	170	568	168	8	556	172	562	170	568	168
437.leslie3d	8	1052	71.5	1057	71.2	1053	71.4	4	470	80.1	470	79.9	471	79.8
444.namd	8	425	151	428	150	425	151	8	418	153	418	153	418	153
447.dealII	8	317	289	322	284	325	282	8	317	289	322	284	325	282
450.soplex	8	864	77.2	853	78.2	858	77.7	4	374	89.3	351	94.9	362	92.3
453.povray	8	162	262	163	261	164	260	8	144	296	142	299	144	296
454.calculix	8	247	267	250	264	249	265	8	247	267	250	264	249	265
459.GemsFDTD	8	1222	69.5	1221	69.5	1223	69.4	8	1222	69.5	1221	69.5	1223	69.4
465.tonto	8	476	165	478	165	471	167	8	445	177	464	170	448	176
470.lbm	8	814	135	814	135	814	135	8	814	135	814	135	814	135
481.wrf	8	659	136	659	136	659	136	8	656	136	656	136	657	136
482.sphinx3	8	1049	149	1111	140	1045	149	8	1057	148	1028	152	1025	152

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPEC_ic14/config/sysinfo.rev6818

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Platform Notes (Continued)

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sat Jan 31 03:52:16 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E3-1285 v3 @ 3.60GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 8
    physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:       16165980 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 30 18:57
```

```
SPEC is set to: /home/SPEC_ic14
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_home ext4  860G  12G  805G  2% /home
```

```
Additional information from dmidecode:
BIOS IBM -[JUE115CUS-1.06]- 11/11/2014
Memory:
4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPEC_ic14/libs/32:/home/SPEC_ic14/libs/64:/home/SPEC_ic14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2015

Hardware Availability: Jul-2014

Software Availability: Nov-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2015

Hardware Availability: Jul-2014

Software Availability: Nov-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll12

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M5
(Intel Xeon E3-1285 v3, 3.60 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 148

CPU2006 license: 9017

Test date: Jan-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Feb 25 11:29:32 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 February 2015.