



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp®\_rate2006 = 369

Express5800/R120f-2E (Intel Xeon E5-2660 v3)

SPECfp\_rate\_base2006 = 358

CPU2006 license: 9006


Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

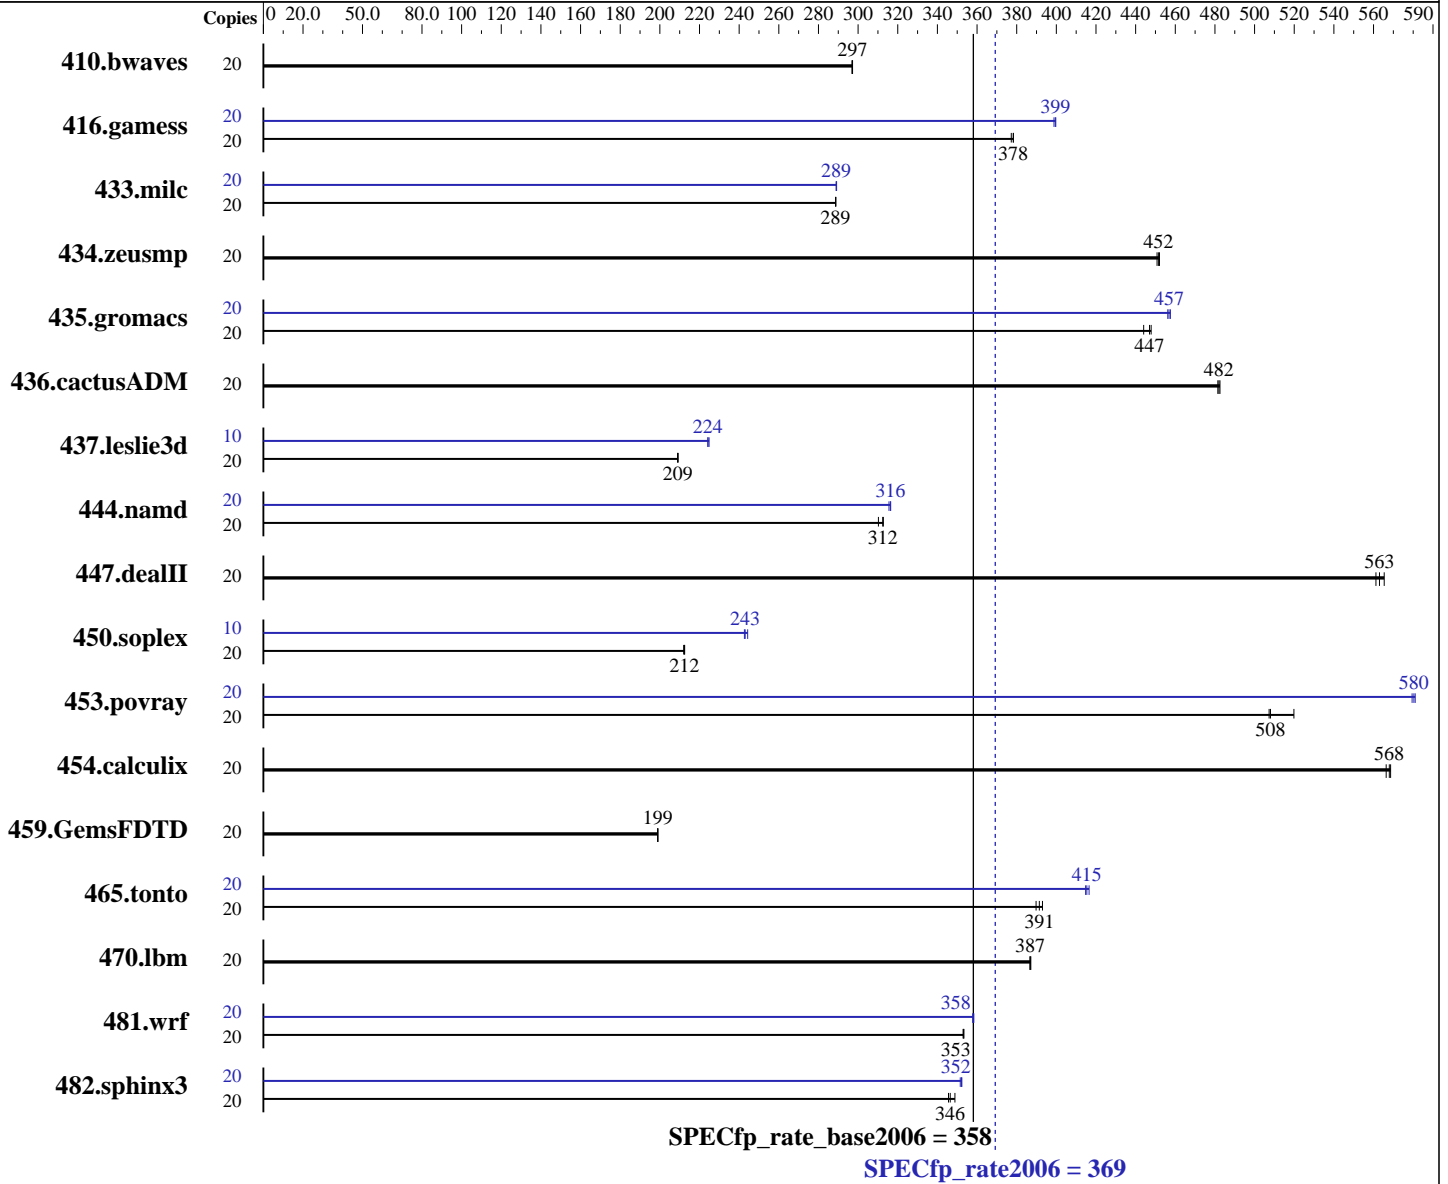

### Hardware

CPU Name: Intel Xeon E5-2660 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 10 cores, 1 chip, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Kernel 2.6.32-431.20.3.el6.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp\_rate2006 = 369

Express5800/R120f-2E (Intel Xeon E5-2660 v3)

SPECfp\_rate\_base2006 = 358

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	20	915	297	<b>915</b>	<b>297</b>	915	297	20	915	297	<b>915</b>	<b>297</b>	915	297
416.gamess	20	<b>1035</b>	<b>378</b>	1038	377	1035	378	20	<b>980</b>	<b>399</b>	982	399	980	400
433.milc	20	<b>636</b>	<b>289</b>	636	289	636	289	20	<b>635</b>	<b>289</b>	635	289	635	289
434.zeusmp	20	404	451	<b>403</b>	<b>452</b>	403	452	20	404	451	<b>403</b>	<b>452</b>	403	452
435.gromacs	20	319	448	322	444	<b>319</b>	<b>447</b>	20	312	458	313	456	<b>313</b>	<b>457</b>
436.cactusADM	20	496	481	495	483	<b>496</b>	<b>482</b>	20	496	481	495	483	<b>496</b>	<b>482</b>
437.leslie3d	20	899	209	900	209	<b>899</b>	<b>209</b>	10	419	224	<b>419</b>	<b>224</b>	418	225
444.namd	20	513	313	<b>513</b>	<b>312</b>	517	310	20	508	316	<b>507</b>	<b>316</b>	507	316
447.dealII	20	<b>406</b>	<b>563</b>	405	565	408	561	20	<b>406</b>	<b>563</b>	405	565	408	561
450.soplex	20	<b>785</b>	<b>212</b>	787	212	785	213	10	341	244	<b>343</b>	<b>243</b>	344	243
453.povray	20	210	507	205	520	<b>209</b>	<b>508</b>	20	183	581	<b>183</b>	<b>580</b>	184	579
454.calculix	20	<b>291</b>	<b>568</b>	291	566	290	569	20	<b>291</b>	<b>568</b>	291	566	290	569
459.GemsFDTD	20	1067	199	1067	199	<b>1067</b>	<b>199</b>	20	1067	199	1067	199	<b>1067</b>	<b>199</b>
465.tonto	20	505	390	<b>503</b>	<b>391</b>	501	393	20	<b>474</b>	<b>415</b>	472	417	475	415
470.lbm	20	710	387	<b>710</b>	<b>387</b>	711	387	20	710	387	<b>710</b>	<b>387</b>	711	387
481.wrf	20	633	353	632	353	<b>632</b>	<b>353</b>	20	<b>624</b>	<b>358</b>	623	358	624	358
482.sphinx3	20	1117	349	<b>1125</b>	<b>346</b>	1128	346	20	1109	352	<b>1107</b>	<b>352</b>	1106	352

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Power Management Policy: Custom  
Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 369

Express5800/R120f-2E (Intel Xeon E5-2660 v3)

SPECfp\_rate\_base2006 = 358

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Platform Notes (Continued)

Patrol Scrub: Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp\_rate2006 = 369**

Express5800/R120f-2E (Intel Xeon E5-2660 v3)

**SPECfp\_rate\_base2006 = 358**

**CPU2006 license:** 9006

**Test date:** Dec-2014

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2015

**Tested by:** NEC Corporation

**Software Availability:** Jul-2014

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 369

Express5800/R120f-2E (Intel Xeon E5-2660 v3)

SPECfp\_rate\_base2006 = 358

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
 -ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 369

Express5800/R120f-2E (Intel Xeon E5-2660 v3)

SPECfp\_rate\_base2006 = 358

CPU2006 license: 9006

Test date: Dec-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Feb 25 11:30:24 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 February 2015.