



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## HITACHI

**SPECint\_rate2006 = 1210**

BladeSymphony BS520H (Intel Xeon E5-2697 v3)

**SPECint\_rate\_base2006 = 1170**

CPU2006 license: 35


**Test date:** Jan-2015

**Test sponsor:** HITACHI

**Hardware Availability:** Dec-2014

**Tested by:** HITACHI

**Software Availability:** Nov-2013

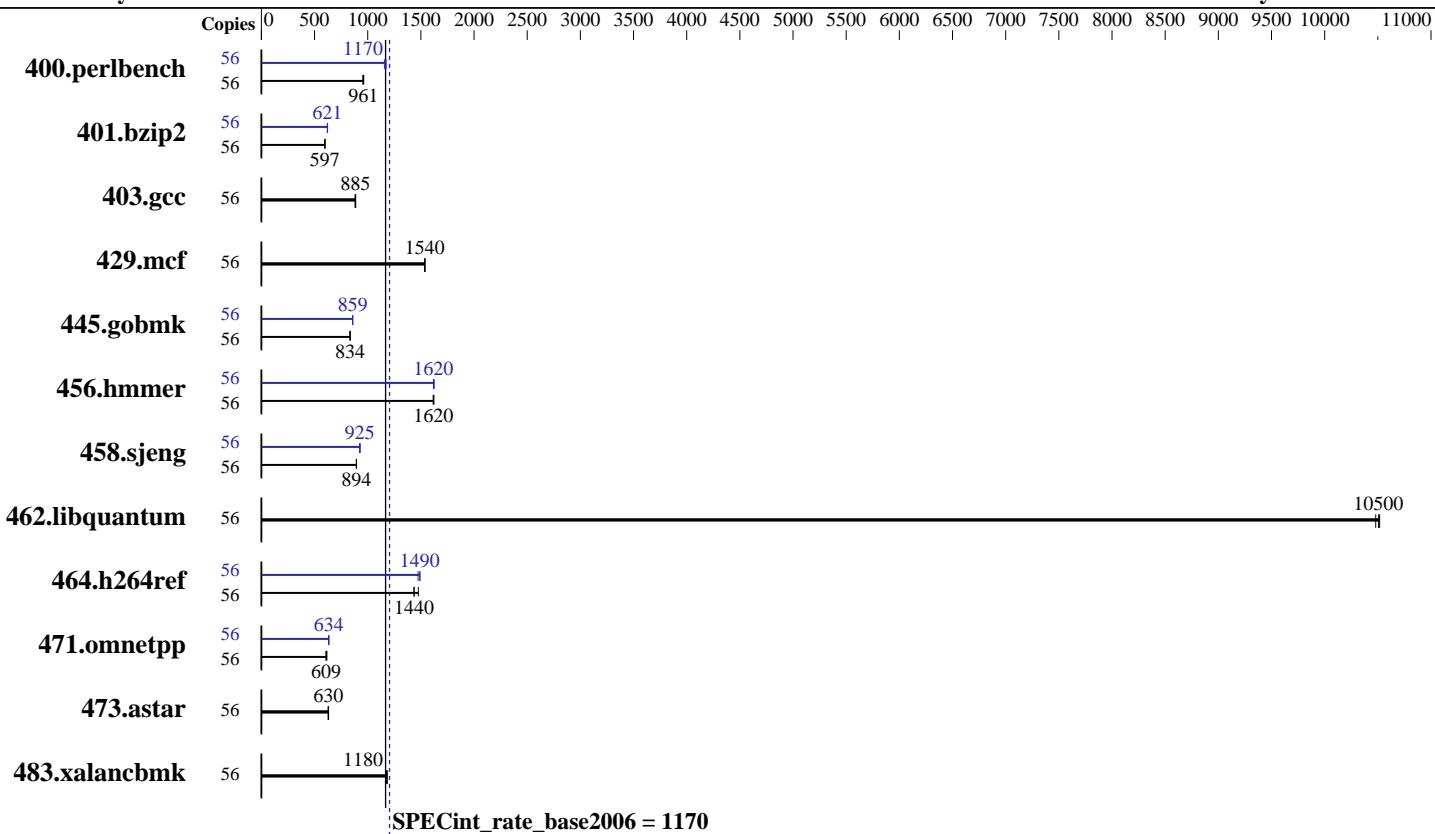

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon E5-2697 v3	Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz	Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
CPU MHz:	2600	Auto Parallel:	No
FPU:	Integrated	File System:	ext4
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1, 2 chips	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V10.0
L3 Cache:	35 MB I+D on chip per chip		
Other Cache:	None		
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)		
Disk Subsystem:	2 x 600 GB SAS, 10000 RPM, RAID1		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2697 v3)

**SPECint\_rate2006 = 1210**

**SPECint\_rate\_base2006 = 1170**

CPU2006 license: 35

Test date: Jan-2015

Test sponsor: HITACHI

Hardware Availability: Dec-2014

Tested by: HITACHI

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	569	962	574	954	<b>569</b>	<b>961</b>	56	473	1160	467	1170	<b>468</b>	<b>1170</b>
401.bzip2	56	<b>905</b>	<b>597</b>	905	597	903	598	56	<b>870</b>	<b>621</b>	871	621	869	622
403.gcc	56	508	887	<b>509</b>	<b>885</b>	512	881	56	508	887	<b>509</b>	<b>885</b>	512	881
429.mcf	56	<b>332</b>	<b>1540</b>	333	1540	332	1540	56	<b>332</b>	<b>1540</b>	333	1540	332	1540
445.gobmk	56	<b>704</b>	<b>834</b>	704	834	705	834	56	685	857	<b>684</b>	<b>859</b>	684	859
456.hammer	56	322	1620	323	1620	<b>323</b>	<b>1620</b>	56	321	1630	323	1620	<b>323</b>	<b>1620</b>
458.sjeng	56	<b>758</b>	<b>894</b>	759	892	757	895	56	733	924	<b>732</b>	<b>925</b>	729	929
462.libquantum	56	<b>110</b>	<b>10500</b>	110	10500	111	10500	56	<b>110</b>	<b>10500</b>	110	10500	111	10500
464.h264ref	56	864	1440	<b>863</b>	<b>1440</b>	840	1480	56	831	1490	<b>832</b>	<b>1490</b>	841	1470
471.omnetpp	56	568	616	<b>575</b>	<b>609</b>	575	608	56	553	633	552	634	<b>552</b>	<b>634</b>
473.astar	56	<b>624</b>	<b>630</b>	622	632	626	628	56	<b>624</b>	<b>630</b>	622	632	626	628
483.xalancbmk	56	328	1180	327	1180	<b>327</b>	<b>1180</b>	56	328	1180	327	1180	<b>327</b>	<b>1180</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Patrol Scrub = Disable  
Per Core P-state = Disable  
COD Preferenc = Enable

```
Sysinfo program /home/speccpu2006/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$
running on 520Hx36564 Sun Jan 18 10:17:09 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
        2 "physical id"s (chips)
        56 "processors"
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

SPECint\_rate2006 = 1210

BladeSymphony BS520H (Intel Xeon E5-2697 v3)

SPECint\_rate\_base2006 = 1170

CPU2006 license: 35

Test date: Jan-2015

Test sponsor: HITACHI

Hardware Availability: Dec-2014

Tested by: HITACHI

Software Availability: Nov-2013

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings   : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      263987312 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux 520Hx36564 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 16 19:12
```

```
SPEC is set to: /home/speccpu2006/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_520hx36564-lv_home ext4  485G  56G  405G  13% /home
```

Additional information from dmidecode:

```
BIOS HITACHI 08-20 01/06/2015
Memory:
 8x NO DIMM Unknown
 16x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/speccpu2006/cpu2006/libs/32:/home/speccpu2006/cpu2006/libs/64:/home/speccpu2006/cpu2006/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2697 v3)

**SPECint\_rate2006 = 1210**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jan-2015

Hardware Availability: Dec-2014

Software Availability: Nov-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

BladeSymphony BS520H, Hitachi Compute Blade 520H and BladeSymphony BS2500 HC0A1 are electronically equivalent.

The results have been measured on a Hitachi Compute Blade 520H.

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2697 v3)

**SPECint\_rate2006 = 1210**

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

**Test date:** Jan-2015

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS520H (Intel Xeon E5-2697 v3)

SPECint\_rate2006 = 1210

SPECint\_rate\_base2006 = 1170

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jan-2015

Hardware Availability: Dec-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>  
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.20150127.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>  
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.20150127.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Feb 25 11:31:34 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 February 2015.