




# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

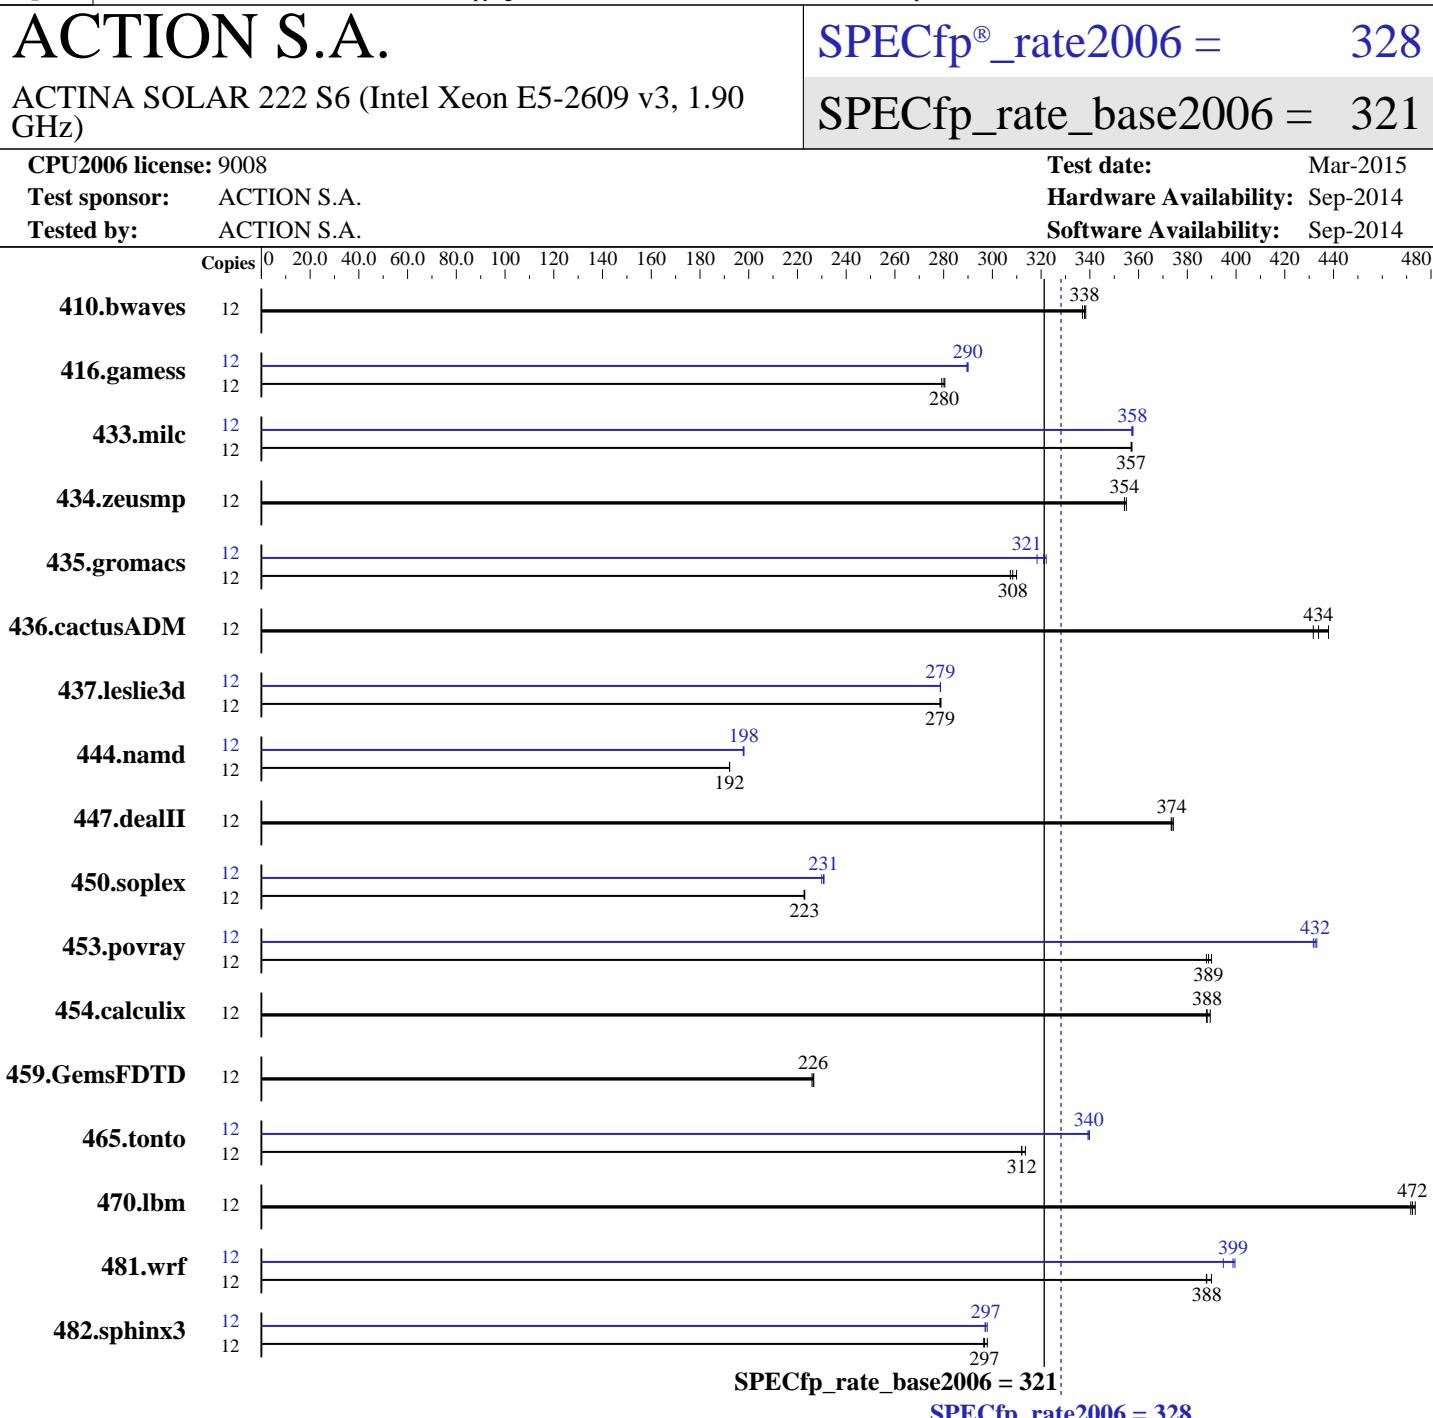

## Hardware

CPU Name: Intel Xeon E5-2609 v3  
 CPU Characteristics:  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Compiler: 3.10.0-123.20.1.el7.x86\_64  
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<b>ACTION S.A.</b>		<b>SPECfp_rate2006 =</b>	<b>328</b>
ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)		<b>SPECfp_rate_base2006 =</b>	<b>321</b>
<b>CPU2006 license:</b>	9008	<b>Test date:</b>	Mar-2015
<b>Test sponsor:</b>	ACTION S.A.	<b>Hardware Availability:</b>	Sep-2014
<b>Tested by:</b>	ACTION S.A.	<b>Software Availability:</b>	Sep-2014
L3 Cache:	15 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	32/64-bit
Memory:	128 GB (16 x 8 GB 1Rx4 PC4-2133P-R, running at 1600 MHz)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 x 240 GB SATA II SSD	Other Software:	None
Other Hardware:	None		

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	484	337	<b>483</b>	<b>338</b>	482	338	12	484	337	<b>483</b>	<b>338</b>	482	338
416.gamess	12	841	279	838	281	<b>839</b>	<b>280</b>	12	<b>811</b>	<b>290</b>	810	290	811	290
433.milc	12	309	357	<b>309</b>	<b>357</b>	308	357	12	<b>308</b>	<b>358</b>	308	358	308	357
434.zeusmp	12	<b>308</b>	<b>354</b>	308	354	308	355	12	<b>308</b>	<b>354</b>	308	354	308	355
435.gromacs	12	279	307	276	310	<b>278</b>	<b>308</b>	12	266	322	269	318	<b>267</b>	<b>321</b>
436.cactusADM	12	332	432	<b>331</b>	<b>434</b>	327	438	12	<b>332</b>	<b>432</b>	<b>331</b>	<b>434</b>	327	438
437.leslie3d	12	<b>405</b>	<b>279</b>	405	279	404	279	12	<b>405</b>	<b>279</b>	405	279	405	279
444.namd	12	<b>501</b>	<b>192</b>	501	192	501	192	12	486	198	<b>486</b>	<b>198</b>	487	198
447.dealII	12	<b>367</b>	<b>374</b>	368	373	367	374	12	<b>367</b>	<b>374</b>	368	373	367	374
450.soplex	12	<b>449</b>	<b>223</b>	449	223	449	223	12	<b>434</b>	<b>231</b>	433	231	435	230
453.povray	12	164	390	<b>164</b>	<b>389</b>	165	388	12	<b>148</b>	<b>432</b>	147	433	148	432
454.calculix	12	254	389	255	388	<b>255</b>	<b>388</b>	12	254	389	255	388	<b>255</b>	<b>388</b>
459.GemsFDTD	12	<b>562</b>	<b>226</b>	563	226	562	227	12	<b>562</b>	<b>226</b>	563	226	562	227
465.tonto	12	378	312	377	314	<b>378</b>	<b>312</b>	12	<b>348</b>	<b>340</b>	348	339	347	340
470.lbm	12	350	472	<b>349</b>	<b>472</b>	348	474	12	350	472	<b>349</b>	<b>472</b>	348	474
481.wrf	12	<b>345</b>	<b>388</b>	344	390	346	388	12	<b>336</b>	<b>399</b>	340	395	335	400
482.sphinx3	12	789	296	785	298	<b>788</b>	<b>297</b>	12	785	298	787	297	<b>787</b>	<b>297</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings

Power Technology = Energy Efficient

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)

**SPECfp\_rate2006 = 328**

**SPECfp\_rate\_base2006 = 321**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

BMC Setting  
Fan Mode = Full Speed

```
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Wed Mar 4 19:02:09 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz
        2 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      131761400 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 7.0 (Maipo)
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.20.1.el7.x86_64 #3 SMP Wed Feb 4
14:55:18 CET 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 4 07:24

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)

**SPECfp\_rate2006 = 328**

**SPECfp\_rate\_base2006 = 321**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Platform Notes (Continued)

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdal       ext4  212G   26G  176G  13%  /
```

Additional information from dmidecode:

BIOS American Megatrends Inc. 1.0a 11/05/2014

Memory:

```
16x 8 GB
1x Micron(data:14/25) 18ASF1G72PZ-2G1A2 8 GB 1600 MHz 1 rank
2x Micron(data:14/30) 18ASF1G72PZ-2G1A2 8 GB 1600 MHz 1 rank
10x Micron(data:14/32) 18ASF1G72PZ-2G1A2 8 GB 1600 MHz 1 rank
1x Micron(data:14/34) 18ASF1G72PZ-2G1A2 8 GB 1600 MHz 1 rank
2x Micron(data:14/35) 18ASF1G72PZ-2G1A2 8 GB 1600 MHz 1 rank
```

(End of data from sysinfo program)

dmidecode does not properly detect memory modules  
16 modules of 8 GB were used to run the test (128 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/lib/32:/cpu2006.1.2/lib/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory  
using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)

**SPECfp\_rate2006 = 328**

**SPECfp\_rate\_base2006 = 321**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)

**SPECfp\_rate2006 = 328**

**SPECfp\_rate\_base2006 = 321**

CPU2006 license: 9008

Test date: Mar-2015

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll12

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)

**SPECfp\_rate2006 = 328**

**SPECfp\_rate\_base2006 = 321**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevC-jan-2015-For-Supermicro-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 222 S6 (Intel Xeon E5-2609 v3, 1.90 GHz)

**SPECfp\_rate2006 = 328**

**SPECfp\_rate\_base2006 = 321**

**CPU2006 license:** 9008

**Test date:** Mar-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 24 17:18:05 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 March 2015.