



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp®_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Jul-2014

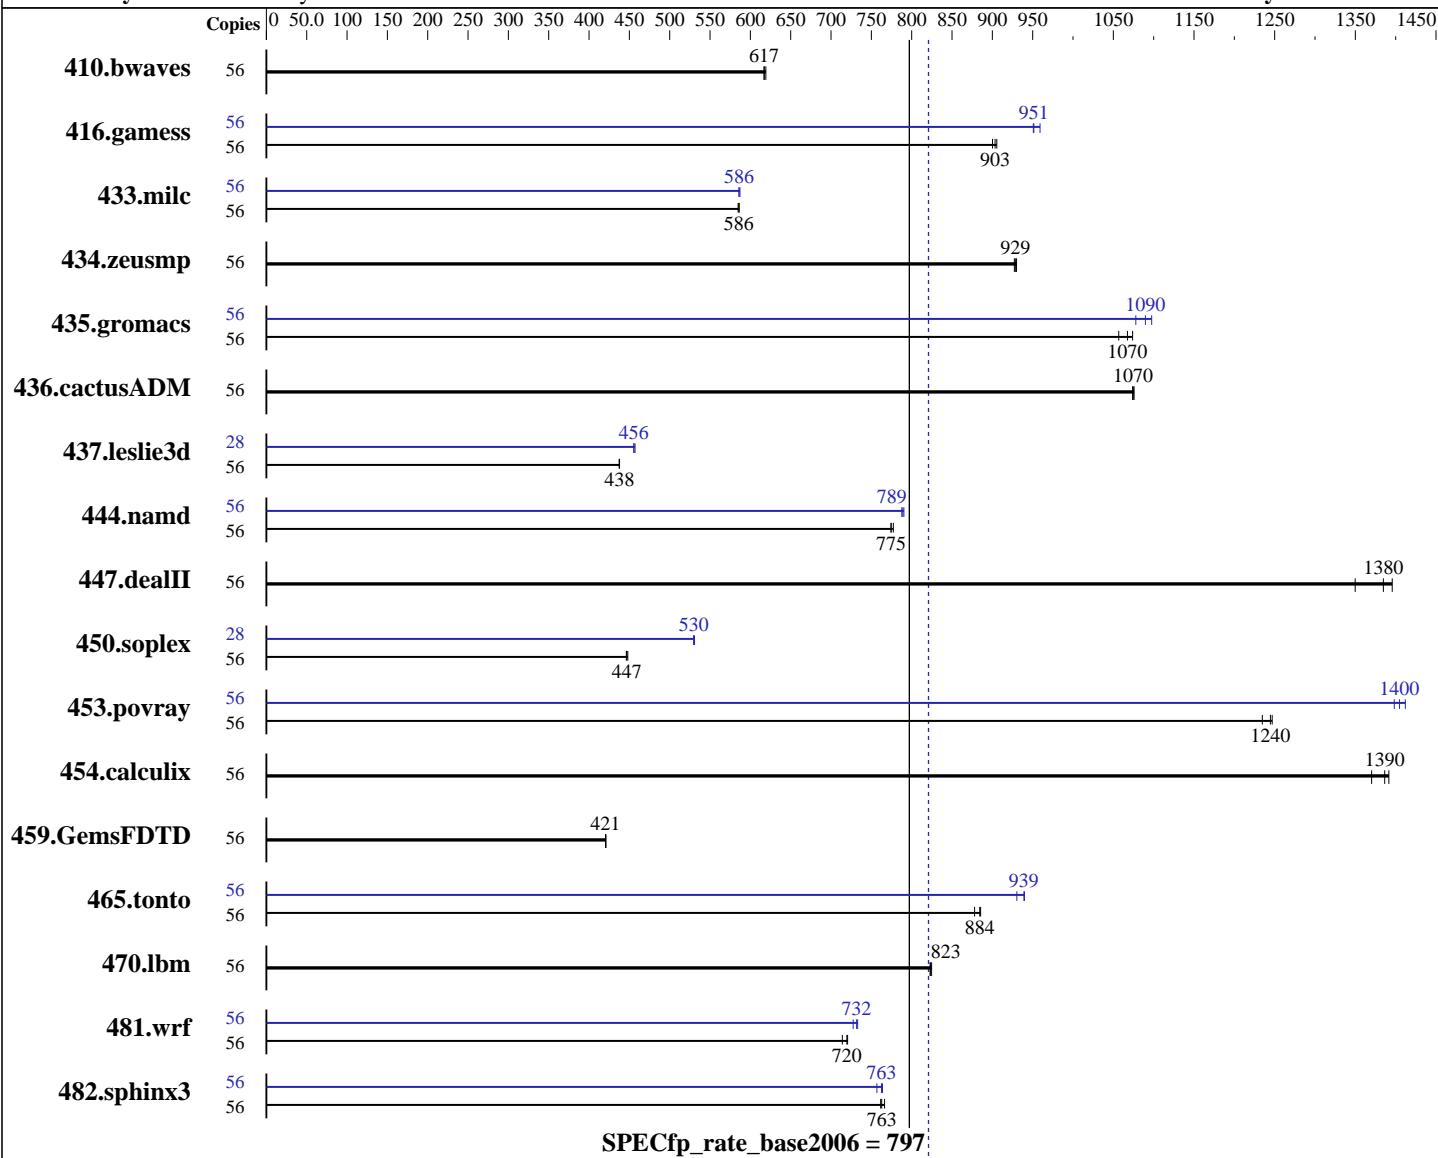

Hardware

CPU Name: Intel Xeon E5-2695 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Compiler: 3.10.0-123.el7.x86_64
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Feb-2015

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Jul-2014

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 300GB SAS, 15K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1229	619	1234	617	1233	617	56	1229	619	1234	617	1233	617
416.gamess	56	1218	900	1214	903	1211	906	56	1153	951	1152	951	1143	959
433.milc	56	877	586	879	585	878	586	56	877	586	877	586	876	587
434.zeusmp	56	549	929	548	930	550	927	56	549	929	548	930	550	927
435.gromacs	56	372	1070	375	1070	378	1060	56	367	1090	364	1100	371	1080
436.cactusADM	56	623	1070	622	1080	623	1070	56	623	1070	622	1080	623	1070
437.leslie3d	56	1202	438	1203	438	1203	437	28	578	456	576	457	578	456
444.namd	56	578	777	580	775	580	774	56	570	788	568	790	569	789
447.dealII	56	475	1350	463	1380	459	1400	56	475	1350	463	1380	459	1400
450.soplex	56	1042	448	1045	447	1047	446	28	440	531	441	530	441	530
453.povray	56	239	1250	241	1230	239	1240	56	211	1410	213	1400	212	1400
454.calculix	56	333	1390	337	1370	332	1390	56	333	1390	337	1370	332	1390
459.GemsFDTD	56	1413	420	1411	421	1413	421	56	1413	420	1411	421	1413	421
465.tonto	56	623	884	628	878	622	885	56	586	940	592	930	587	939
470.lbm	56	933	825	935	823	935	823	56	933	825	935	823	935	823
481.wrf	56	876	714	868	721	869	720	56	855	732	853	733	860	727
482.sphinx3	56	1433	762	1431	763	1424	766	56	1429	764	1442	757	1431	763

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Power Technology set to Energy Efficient
 CPU performance set to HPC
 Energy Performance BIAS setting set to Balanced Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Feb-2015

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Jul-2014

Platform Notes (Continued)

Memory RAS configuration set to Maximum Performance

QPI Snoop Mode set to Cluster-on-Die

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Sat Feb 28 17:42:21 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz
        2 "physical id"s (chips)
        56 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 7
        siblings : 14
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    cache size : 17920 KB
```

```
From /proc/meminfo
    MemTotal:      263702488 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
    Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
    EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Feb 27 06:48

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        xfs   260G  111G  150G  43% /
Additional information from dmidecode:
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Feb-2015

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Jul-2014

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. B200M4.2.2.3d.0.111420141438 11/14/2014

Memory:

16x 0xCE00 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Jul-2014

Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Feb-2015

Hardware Availability: Sep-2014

Software Availability: Jul-2014

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Feb-2015

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Jul-2014

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2695 v3 @ 2.30GHz)

SPECfp_rate2006 = 821

SPECfp_rate_base2006 = 797

CPU2006 license: 9019

Test date: Feb-2015

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Jul-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 24 17:18:54 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 March 2015.