



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3 @ 2.50 GHz)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 2000

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2015

Hardware Availability: Apr-2014

Software Availability: Feb-2015

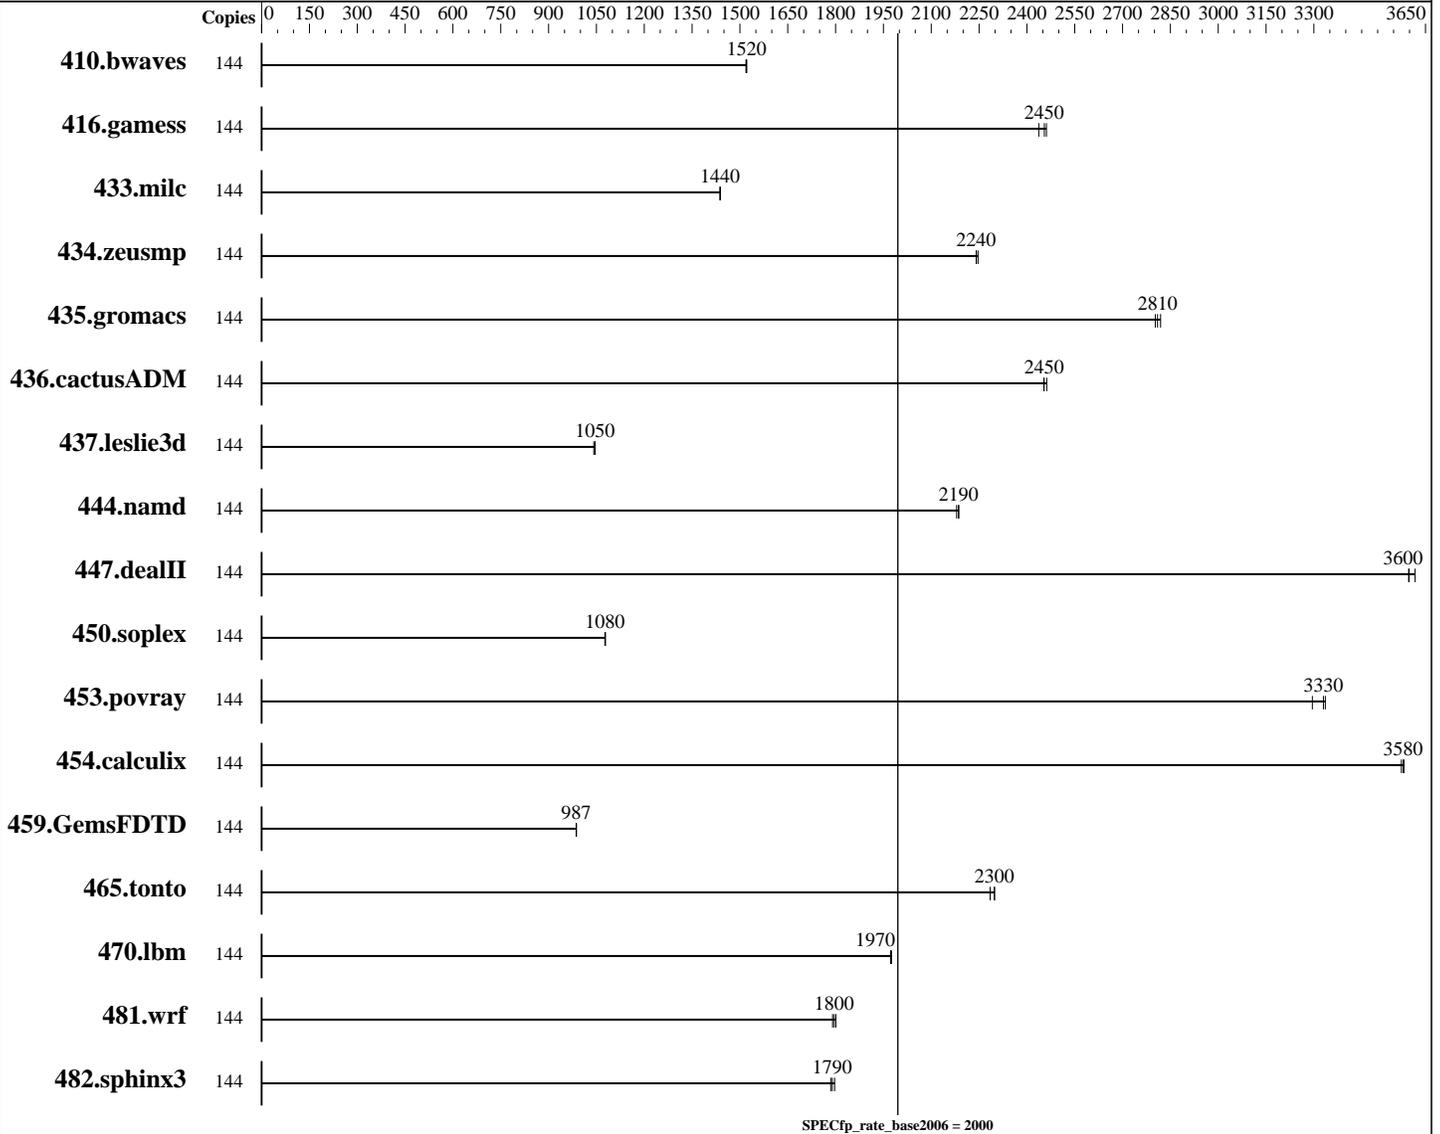

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 Chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default
 Compiler: C/C++: Version 15.0.2.164 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.2.164 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3 @ 2.50 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 2000

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2015

Hardware Availability: Apr-2014

Software Availability: Feb-2015

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB 6Gb/s SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	1287	1520	1288	1520	1287	1520							
416.gamess	144	1157	2440	1149	2450	1146	2460							
433.milc	144	919	1440	919	1440	919	1440							
434.zeusmp	144	585	2240	583	2250	585	2240							
435.gromacs	144	365	2820	366	2810	367	2800							
436.cactusADM	144	701	2450	699	2460	701	2450							
437.leslie3d	144	1299	1040	1294	1050	1295	1050							
444.namd	144	528	2190	528	2190	530	2180							
447.dealII	144	458	3600	458	3600	455	3620							
450.soplex	144	1114	1080	1115	1080	1115	1080							
453.povray	144	232	3300	230	3340	230	3330							
454.calculix	144	332	3580	332	3580	332	3570							
459.GemsFDTD	144	1548	987	1548	987	1548	987							
465.tonto	144	616	2300	617	2300	620	2280							
470.lbm	144	1002	1980	1003	1970	1003	1970							
481.wrf	144	898	1790	893	1800	896	1800							
482.sphinx3	144	1562	1800	1568	1790	1572	1780							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3 @ 2.50 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 2000

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Apr-2015
Hardware Availability: Apr-2014
Software Availability: Feb-2015

Platform Notes

```

CPU performance set to Enterprise
Power Technology set to Performance
CPU Power State C6 set to Disabled
CPU Power State C1 Enhanced set to Disabled
Package C State Limit set to C0/C1 State
Energy Performance policy set to Balanced Performance
Memory Power saving mode set to Disabled
DRAM Clock Throttling Set to Auto
LV DDR Mode set to Performance mode
Closed Loop Thermal Throttling set to Enabled
Memory RAS configuration set to Maximum Performance
Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-cfac Thu Apr 16 09:56:22 2015

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```

```

From /proc/meminfo
MemTotal:      1058822544 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3 @ 2.50 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 2000

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2015

Hardware Availability: Apr-2014

Software Availability: Feb-2015

Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-cfac 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 16 05:40
```

```
SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdpl       xfs   181G   44G  137G  25% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C460M4.2.0.4.20.040420150215 04/04/2015

Memory:

```
64x 0xCE00 M393A2G40DB0-CPB 16 GB 2 rank 1600 MHz
32x NO DIMM NO DIMM 1600 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2/libs/32:/home/cpu2006-1.2/libs/64:/home/cpu2006-1.2/sh"
```

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3 @ 2.50 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 2000

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2015

Hardware Availability: Apr-2014

Software Availability: Feb-2015

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8890 v3 @ 2.50 GHz)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 2000

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2015

Hardware Availability: Apr-2014

Software Availability: Feb-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.20150505.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 5 15:15:56 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 May 2015.