



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®\_rate2006 = Not Run**

**Huawei RH8100 V3 (Intel Xeon E7-8890 v3)**

**SPECfp\_rate\_base2006 = 3870**

**CPU2006 license:** 3175


**Test date:** Apr-2015

**Test sponsor:** Huawei

**Hardware Availability:** May-2015

**Tested by:** Huawei

**Software Availability:** Sep-2014

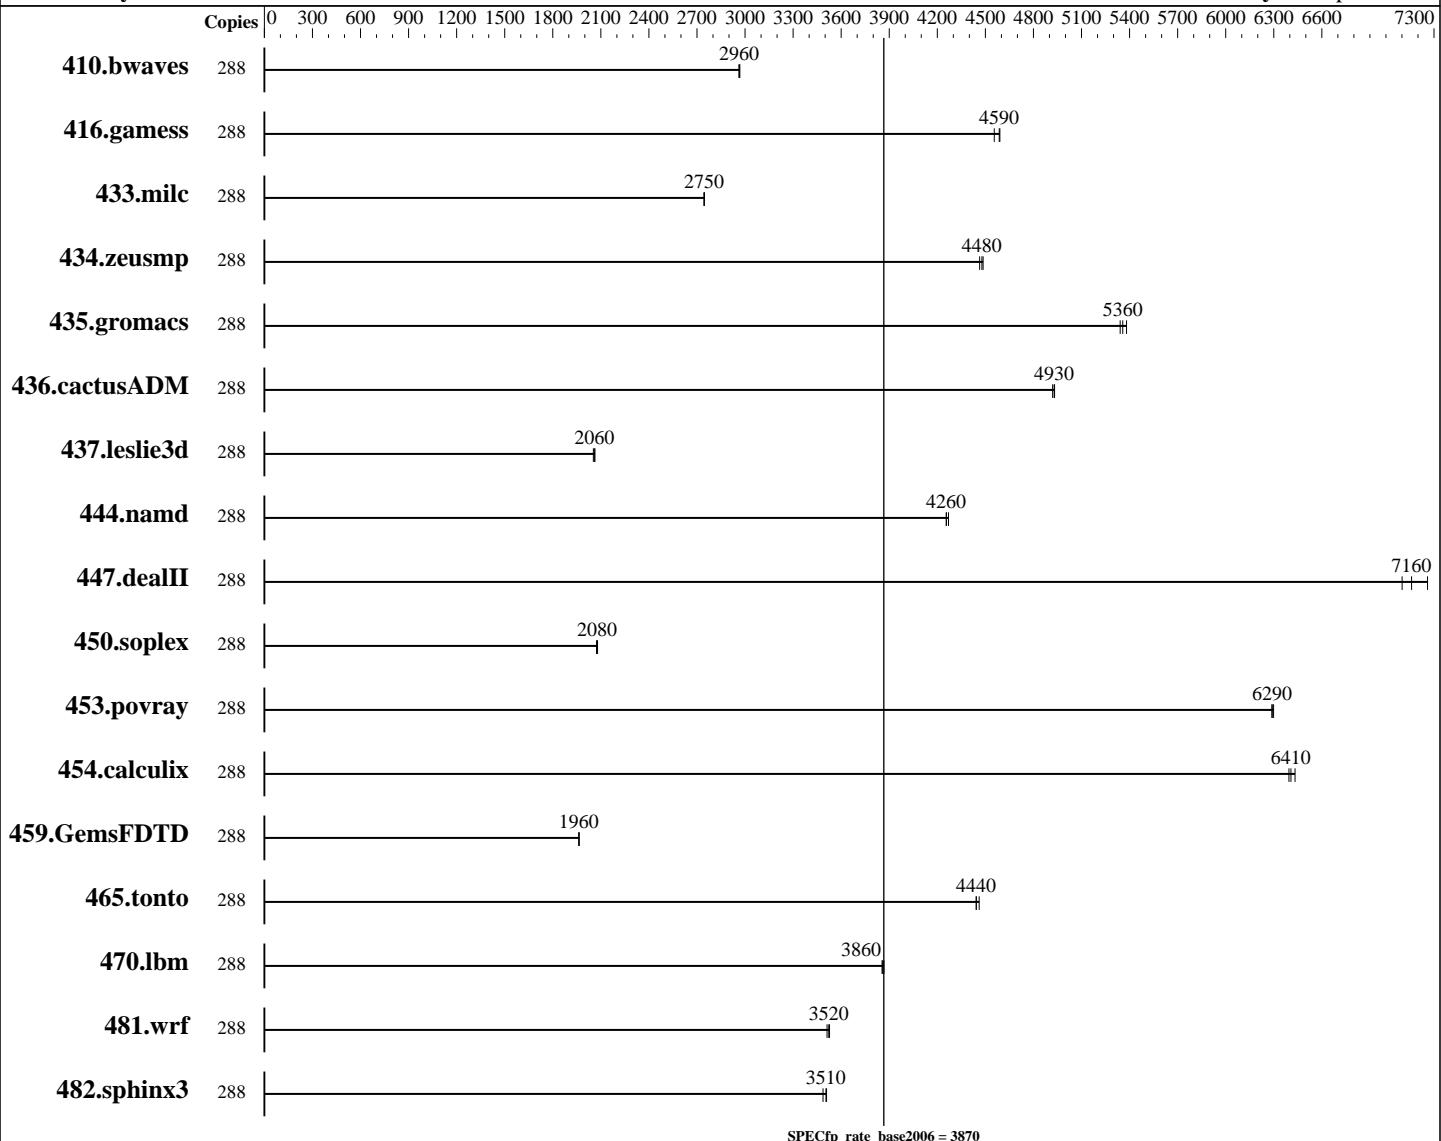

## Hardware

CPU Name: Intel Xeon E7-8890 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 4,6,8 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Compiler: 3.10.0-123.el7.x86\_64  
 C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = Not Run**

Huawei RH8100 V3 (Intel Xeon E7-8890 v3)

**SPECfp\_rate\_base2006 = 3870**

CPU2006 license: 3175

Test date: Apr-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R,  
 running at 1600 MHz)  
 Disk Subsystem: 3 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	288	<b>1321</b>	<b>2960</b>	1319	2970	1321	2960							
416.gamess	288	1238	4560	<b>1230</b>	<b>4590</b>	1228	4590							
433.milc	288	963	2750	964	2740	<b>963</b>	<b>2750</b>							
434.zeusmp	288	584	4490	<b>585</b>	<b>4480</b>	587	4460							
435.gromacs	288	382	5380	<b>384</b>	<b>5360</b>	385	5340							
436.cactusADM	288	700	4920	698	4930	<b>698</b>	<b>4930</b>							
437.leslie3d	288	<b>1314</b>	<b>2060</b>	1312	2060	1319	2050							
444.namd	288	<b>543</b>	<b>4260</b>	543	4260	541	4270							
447.dealII	288	454	7260	464	7100	<b>460</b>	<b>7160</b>							
450.soplex	288	<b>1157</b>	<b>2080</b>	1159	2070	1155	2080							
453.povray	288	<b>244</b>	<b>6290</b>	243	6300	244	6290							
454.calculix	288	<b>371</b>	<b>6410</b>	372	6390	369	6430							
459.GemsFDTD	288	<b>1556</b>	<b>1960</b>	1556	1960	1556	1960							
465.tonto	288	<b>638</b>	<b>4440</b>	638	4440	635	4460							
470.lbm	288	1026	3860	<b>1026</b>	<b>3860</b>	1023	3870							
481.wrf	288	912	3530	916	3510	<b>913</b>	<b>3520</b>							
482.sphinx3	288	1610	3490	<b>1601</b>	<b>3510</b>	1600	3510							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Turbo mode set with:  
 cpupower -c all frequency-set -g performance



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = Not Run**

Huawei RH8100 V3 (Intel Xeon E7-8890 v3)

**SPECfp\_rate\_base2006 = 3870**

**CPU2006 license:** 3175

**Test date:** Apr-2015

**Test sponsor:** Huawei

**Hardware Availability:** May-2015

**Tested by:** Huawei

**Software Availability:** Sep-2014

## Platform Notes

BIOS configuration:

```
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Set DRAM Maintenace to Manual
Set DRAM Maintenace Mode to pTRR
Set Patrol Scrub to Enabled
Set Memory Power Saving to disabled
Sysinfo program /spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on RH8100V3 Mon Apr  6 18:54:09 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
        8 "physical id"s (chips)
        288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      2113343000 kB
HugePages_Total:          0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = Not Run**

Huawei RH8100 V3 (Intel Xeon E7-8890 v3)

**SPECfp\_rate\_base2006 = 3870**

**CPU2006 license:** 3175

**Test date:** Apr-2015

**Test sponsor:** Huawei

**Hardware Availability:** May-2015

**Tested by:** Huawei

**Software Availability:** Sep-2014

## Platform Notes (Continued)

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
```

```
Linux RH8100V3 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 6 09:42
```

```
SPEC is set to: /spec
```

```
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        ext4  452G  131G  298G  31% /spec
```

```
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS American Megatrends Inc. BLISV503 03/16/2014
```

```
Memory:
```

```
64x NO DIMM NO DIMM
128x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 2 TB and the dmidecode description should have two lines reading as:

```
64x NO DIMM NO DIMM
```

```
128x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = Not Run**

Huawei RH8100 V3 (Intel Xeon E7-8890 v3)

**SPECfp\_rate\_base2006 = 3870**

CPU2006 license: 3175

Test date: Apr-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

fort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = Not Run**

Huawei RH8100 V3 (Intel Xeon E7-8890 v3)

**SPECfp\_rate\_base2006 = 3870**

**CPU2006 license:** 3175

**Test date:** Apr-2015

**Test sponsor:** Huawei

**Hardware Availability:** May-2015

**Tested by:** Huawei

**Software Availability:** Sep-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-HSW-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:45:54 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.