



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X  
(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECfp<sup>®</sup>\_rate2006 = 3880

SPECfp\_rate\_base2006 = 3810

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

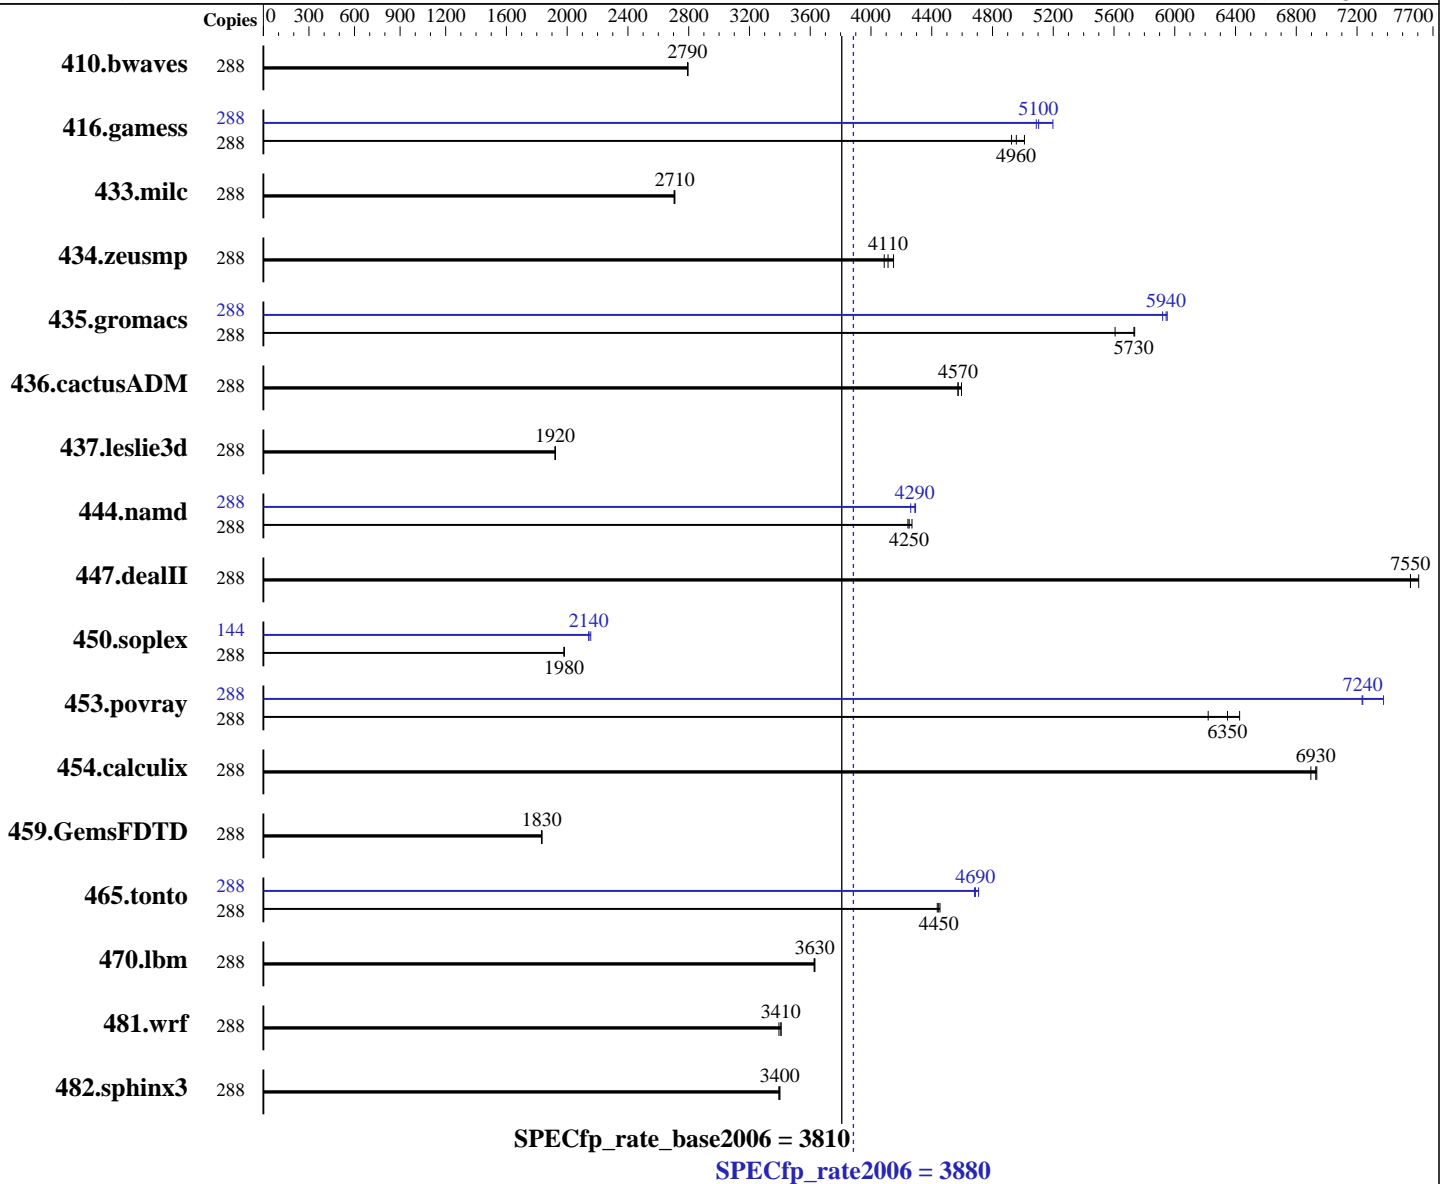

### Hardware

CPU Name: Intel Xeon E7-8890 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 to 16 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP3  
 Kernel 3.0.101-0.47.55-bigsm  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECfp\_rate2006 = 3880

SPECfp\_rate\_base2006 = 3810

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-L, running at 1600 MHz)  
Disk Subsystem: 8 x C8S59A, 900 GB 10K RPM SAS  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Updated libgcc\_s1, glibc, and libstdc++6

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	288	<b>1401</b>	<b>2790</b>	1400	2800	1402	2790	288	<b>1401</b>	<b>2790</b>	1400	2800	1402	2790
416.gamess	288	1145	4930	<b>1138</b>	<b>4960</b>	1125	5010	288	1108	5090	1085	5200	<b>1105</b>	<b>5100</b>
433.milc	288	978	2700	976	2710	<b>976</b>	<b>2710</b>	288	978	2700	976	2710	<b>976</b>	<b>2710</b>
434.zeusmp	288	641	4090	632	4150	<b>637</b>	<b>4110</b>	288	641	4090	632	4150	<b>637</b>	<b>4110</b>
435.gromacs	288	<b>359</b>	<b>5730</b>	367	5610	358	5740	288	346	5950	<b>346</b>	<b>5940</b>	347	5920
436.cactusADM	288	<b>752</b>	<b>4570</b>	749	4600	753	4570	288	<b>752</b>	<b>4570</b>	749	4600	753	4570
437.leslie3d	288	<b>1409</b>	<b>1920</b>	1408	1920	1410	1920	288	<b>1409</b>	<b>1920</b>	1408	1920	1410	1920
444.namd	288	541	4270	544	4240	<b>543</b>	<b>4250</b>	288	<b>539</b>	<b>4290</b>	542	4260	538	4290
447.dealII	288	<b>436</b>	<b>7550</b>	436	7550	433	7610	288	<b>436</b>	<b>7550</b>	436	7550	433	7610
450.soplex	288	1212	1980	1214	1980	<b>1213</b>	<b>1980</b>	144	561	2140	<b>560</b>	<b>2140</b>	557	2160
453.povray	288	246	6220	<b>241</b>	<b>6350</b>	238	6430	288	<b>212</b>	<b>7240</b>	212	7230	208	7370
454.calculix	288	343	6930	<b>343</b>	<b>6930</b>	345	6900	288	343	6930	<b>343</b>	<b>6930</b>	345	6900
459.GemsFDTD	288	<b>1667</b>	<b>1830</b>	1669	1830	1666	1830	288	<b>1667</b>	<b>1830</b>	1669	1830	1666	1830
465.tonto	288	636	4450	<b>637</b>	<b>4450</b>	639	4440	288	602	4710	605	4680	<b>605</b>	<b>4690</b>
470.lbm	288	1092	3630	1090	3630	<b>1090</b>	<b>3630</b>	288	1092	3630	1090	3630	<b>1090</b>	<b>3630</b>
481.wrf	288	<b>944</b>	<b>3410</b>	944	3410	948	3390	288	<b>944</b>	<b>3410</b>	944	3410	948	3390
482.sphinx3	288	1651	3400	1654	3390	<b>1651</b>	<b>3400</b>	288	1651	3400	1654	3390	<b>1651</b>	<b>3400</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
intel\_idle.max\_cstate=1 appended in kernel command line  
Power profile set with:  
cpupower -c all frequency-set -g performance  
Benchmark installed under /dev/shm/cpu2006 and mounted with:  
mount -o bind /dev/shm/cpu2006 /cpu2006  
Transparent Huge Pages enabled with:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X  
(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECfp\_rate2006 = 3880

SPECfp\_rate\_base2006 = 3810

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

## Operating System Notes (Continued)

```

echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
To run the Intel binaries based off the Intel 16.0 compiler (with SLES11 SP3), the following software was updated:
libgcc_s1 (32 and 64-bit versions) to version 4.8.3+r212056-6.3
glibc (32 and 64-bit versions) to version 2.19-17.72
libstdc++6 (32 and 64-bit versions) to version 4.8.3+r212056-6.3

```

## Platform Notes

```

Firmware settings:
Memory RAS Configuration set to Maximum Performance
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on hawk050os1 Tue Oct 27 00:20:10 2015

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
 8 "physical id"s (chips)
288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 4: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 5: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 6: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 7: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```

```

From /proc/meminfo
MemTotal:      2117695720 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**  
(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3880**

**SPECfp\_rate\_base2006 = 3810**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2015

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

## Platform Notes (Continued)

SUSE Linux Enterprise Server 11 (x86\_64)

VERSION = 11

PATCHLEVEL = 3

uname -a:

```
Linux hawk050os1 3.0.101-0.47.55-bigsmpl #1 SMP Thu May 28 08:25:11 UTC 2015
(dc083ee) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 26 10:56 last=S

SPEC is set to: /cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    1010G  246G  764G  25% /dev/shm
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP Bundle: 007.005.000 SFW: 033.161.000 07/18/2015

Memory:

```
103x HP 36ASF2G72LZ-2G1A1 16 GB 2133 MHz, configured at 1600 MHz
12x HP HMA42GL7MFR4N-TF 16 GB 2133 MHz, configured at 1600 MHz
13x HP M386A2G40DB0-CPB 16 GB 2133 MHz, configured at 1600 MHz
64x not defined not defined
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 2 TB and the dmidecode description should have three lines reading as:

```
103x HP 36ASF2G72LZ-2G1A1 16 GB 2133 MHz, configured at 1600 MHz
12x HP HMA42GL7MFR4N-TF 16 GB 2133 MHz, configured at 1600 MHz
13x HP M386A2G40DB0-CPB 16 GB 2133 MHz, configured at 1600 MHz
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**  
(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3880**

**SPECfp\_rate\_base2006 = 3810**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2015

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

## Base Compiler Invocation (Continued)

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
 416.gamess: `-DSPEC_CPU_LP64`  
 433.milc: `-DSPEC_CPU_LP64`  
 434.zeusmp: `-DSPEC_CPU_LP64`  
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
 437.leslie3d: `-DSPEC_CPU_LP64`  
 444.namd: `-DSPEC_CPU_LP64`  
 447.dealII: `-DSPEC_CPU_LP64`  
 450.soplex: `-DSPEC_CPU_LP64`  
 453.povray: `-DSPEC_CPU_LP64`  
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
 459.GemsFDTD: `-DSPEC_CPU_LP64`  
 465.tonto: `-DSPEC_CPU_LP64`  
 470.lbm: `-DSPEC_CPU_LP64`  
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
 482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3880**

**SPECfp\_rate\_base2006 = 3810**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2015

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECfp\_rate2006 = 3880

SPECfp\_rate\_base2006 = 3810

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

**SPECfp\_rate2006 = 3880**

**SPECfp\_rate\_base2006 = 3810**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2015

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-Integrity-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-Integrity-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:17:46 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.