



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp<sup>®</sup>\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

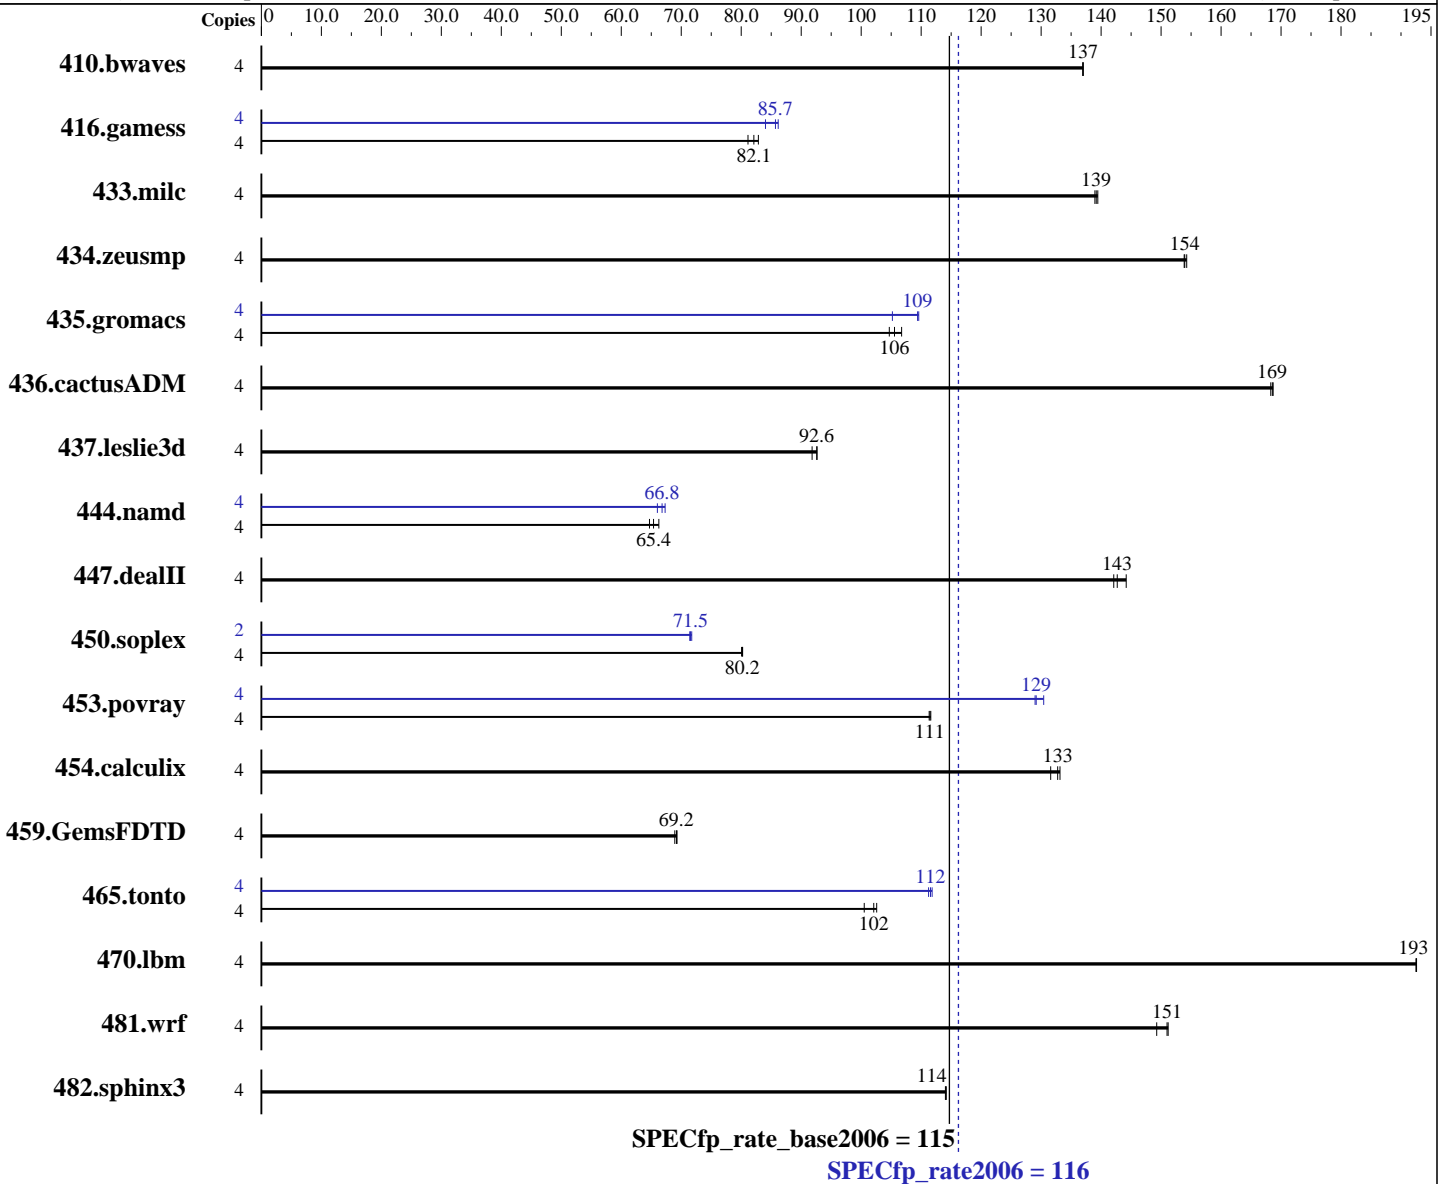

### Hardware

CPU Name: Intel Core i3-6100TE  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (4 x 8 GB 2Rx4 PC4-2133P-U)  
Disk Subsystem: 1 x 200 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	397	137	397	137	<b>397</b>	<b>137</b>	4	397	137	397	137	<b>397</b>	<b>137</b>
416.gamess	4	<b>954</b>	<b>82.1</b>	965	81.1	945	82.9	4	932	84.0	<b>914</b>	<b>85.7</b>	909	86.2
433.milc	4	<b>264</b>	<b>139</b>	264	139	263	139	4	<b>264</b>	<b>139</b>	264	139	263	139
434.zeusmp	4	<b>236</b>	<b>154</b>	236	154	237	154	4	<b>236</b>	<b>154</b>	236	154	237	154
435.gromacs	4	268	107	<b>271</b>	<b>106</b>	273	105	4	261	110	<b>261</b>	<b>109</b>	271	105
436.cactusADM	4	284	168	283	169	<b>284</b>	<b>169</b>	4	284	168	283	169	<b>284</b>	<b>169</b>
437.leslie3d	4	<b>406</b>	<b>92.6</b>	410	91.8	406	92.6	4	<b>406</b>	<b>92.6</b>	410	91.8	406	92.6
444.namd	4	<b>491</b>	<b>65.4</b>	484	66.3	496	64.7	4	<b>480</b>	<b>66.8</b>	486	66.0	477	67.3
447.dealII	4	317	144	<b>321</b>	<b>143</b>	322	142	4	317	144	<b>321</b>	<b>143</b>	322	142
450.soplex	4	416	80.2	417	80.1	<b>416</b>	<b>80.2</b>	2	234	71.4	<b>233</b>	<b>71.5</b>	232	71.7
453.povray	4	191	111	<b>191</b>	<b>111</b>	191	112	4	<b>165</b>	<b>129</b>	163	130	165	129
454.calculix	4	<b>249</b>	<b>133</b>	248	133	251	132	4	<b>249</b>	<b>133</b>	248	133	251	132
459.GemsFDTD	4	616	68.9	612	69.3	<b>613</b>	<b>69.2</b>	4	616	68.9	612	69.3	<b>613</b>	<b>69.2</b>
465.tonto	4	392	101	384	103	<b>386</b>	<b>102</b>	4	354	111	352	112	<b>353</b>	<b>112</b>
470.lbm	4	285	193	285	193	<b>285</b>	<b>193</b>	4	285	193	285	193	<b>285</b>	<b>193</b>
481.wrf	4	299	149	296	151	<b>296</b>	<b>151</b>	4	299	149	296	151	<b>296</b>	<b>151</b>
482.sphinx3	4	684	114	<b>683</b>	<b>114</b>	683	114	4	684	114	<b>683</b>	<b>114</b>	683	114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on X11SSZ-01 Sun Nov 29 22:16:16 2015

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Core(TM) i3-6100TE CPU @ 2.70GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 2
  siblings     : 4
  physical 0   : cores 0 1
cache size     : 4096 KB
```

```
From /proc/meminfo
MemTotal:      32763244 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux X11SSZ-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 29 07:14
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   183G  43G  140G  24% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

### Platform Notes (Continued)

BIOS American Megatrends Inc. 1.0a 11/09/2015

Memory:

4x Micron 16ATF1G64AZ-2G1A2 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Nov-2015  
**Hardware Availability:** Sep-2015  
**Software Availability:** Sep-2015

## Peak Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-M2  
(X11SSZ-QF , Intel Core i3-6100TE)

SPECfp\_rate2006 = 116

SPECfp\_rate\_base2006 = 115

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Nov-2015  
Hardware Availability: Sep-2015  
Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 16 10:40:01 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 December 2015.