



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C, Intel Xeon E5-2680 v4)

SPECfp<sup>®</sup>2006 = 119

SPECfp\_base2006 = 113

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

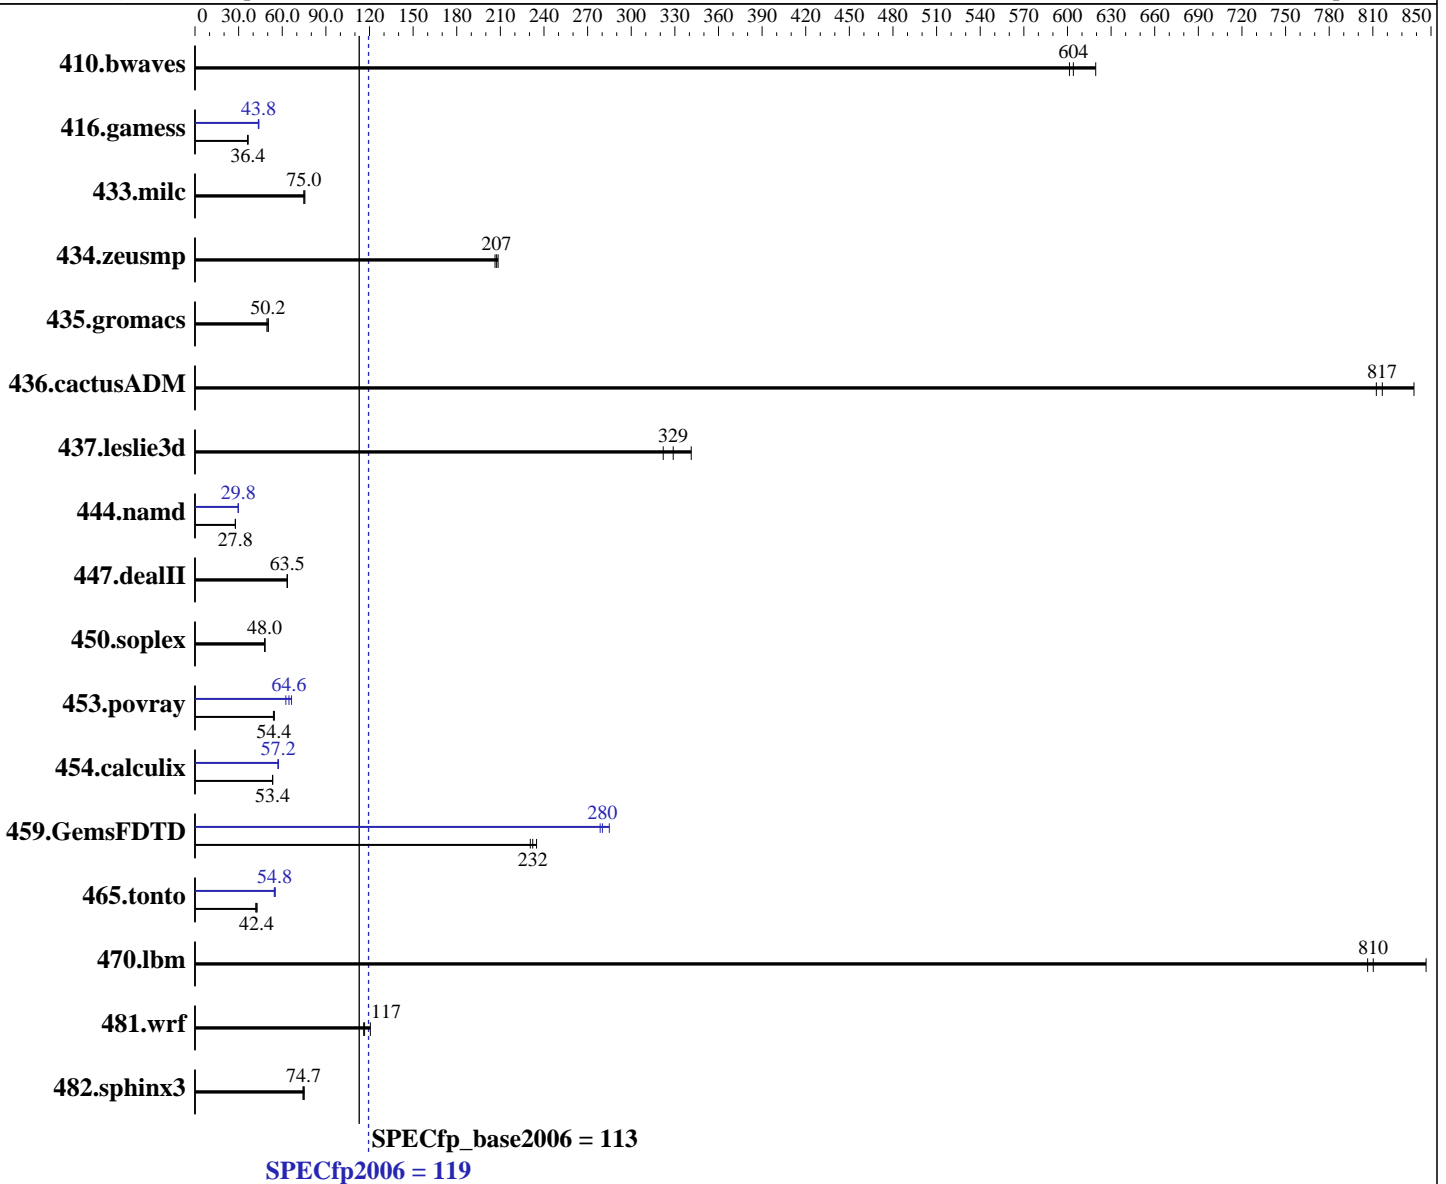

### Hardware

CPU Name: Intel Xeon E5-2680 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C, Intel Xeon E5-2680 v4)

SPECfp2006 = **119**

SPECfp\_base2006 = **113**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 2 x 100 GB SAS SSD, RAID 0  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.9	619	<u>22.5</u>	<u>604</u>	22.6	601	21.9	619	<u>22.5</u>	<u>604</u>	22.6	601
416.gamess	537	36.5	<u>538</u>	<u>36.4</u>	541	36.2	447	43.8	450	43.5	<u>447</u>	<u>43.8</u>
433.milc	<u>122</u>	<u>75.0</u>	121	75.6	123	74.9	<u>122</u>	<u>75.0</u>	121	75.6	123	74.9
434.zeusmp	<u>43.9</u>	<u>207</u>	44.1	206	43.7	208	<u>43.9</u>	<u>207</u>	44.1	206	43.7	208
435.gromacs	144	49.4	<u>142</u>	<u>50.2</u>	142	50.4	144	49.4	<u>142</u>	<u>50.2</u>	142	50.4
436.cactusADM	<u>14.6</u>	<u>817</u>	14.7	812	14.3	838	<u>14.6</u>	<u>817</u>	14.7	812	14.3	838
437.leslie3d	<u>28.6</u>	<u>329</u>	27.5	341	29.2	322	<u>28.6</u>	<u>329</u>	27.5	341	29.2	322
444.namd	<u>289</u>	<u>27.8</u>	289	27.8	289	27.8	270	29.7	<u>269</u>	<u>29.8</u>	269	29.8
447.dealII	<u>180</u>	<u>63.5</u>	180	63.6	181	63.3	<u>180</u>	<u>63.5</u>	180	63.6	181	63.3
450.soplex	174	47.9	173	48.1	<u>174</u>	<u>48.0</u>	174	47.9	173	48.1	<u>174</u>	<u>48.0</u>
453.povray	98.7	53.9	<u>97.7</u>	<u>54.4</u>	97.6	54.5	85.2	62.5	80.1	66.4	<u>82.3</u>	<u>64.6</u>
454.calculix	<u>155</u>	<u>53.4</u>	154	53.4	155	53.4	145	57.1	<u>144</u>	<u>57.2</u>	144	57.4
459.GemsFDTD	46.0	231	<u>45.7</u>	<u>232</u>	45.2	235	37.2	285	<u>37.9</u>	<u>280</u>	38.1	279
465.tonto	231	42.7	236	41.8	<u>232</u>	<u>42.4</u>	<u>179</u>	<u>54.8</u>	178	55.2	181	54.5
470.lbm	16.2	847	<u>17.0</u>	<u>810</u>	17.0	806	16.2	847	<u>17.0</u>	<u>810</u>	17.0	806
481.wrf	92.6	121	<u>95.8</u>	<u>117</u>	96.3	116	92.6	121	<u>95.8</u>	<u>117</u>	96.3	116
482.sphinx3	259	75.1	262	74.3	<u>261</u>	<u>74.7</u>	259	75.1	262	74.3	<u>261</u>	<u>74.7</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Enforce POR = Disabled  
Memory Frequency = 2400  
Early Snoop = Disable  
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on X10DRFF-01 Wed Feb 24 17:43:10 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C, Intel Xeon E5-2680 v4)

SPECfp2006 = 119

SPECfp\_base2006 = 113

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Feb-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

### Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2680 v4@ 2.40GHz
    2 "physical id"s (chips)
    56 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 14
    siblings  : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  cache size : 35840 KB

```

```

From /proc/meminfo
MemTotal:      131916372 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

```

uname -a:
Linux X10DRFF-01 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 24 17:40

```

SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   181G  8.2G 173G   5% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 01/11/2016  
Memory:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C, Intel Xeon E5-2680 v4)

SPECfp2006 = 119

SPECfp\_base2006 = 113

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Feb-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

### Platform Notes (Continued)

8x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "28"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

### Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

### Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C , Intel Xeon E5-2680 v4)

SPECfp2006 = 119

SPECfp\_base2006 = 113

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Feb-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C , Intel Xeon E5-2680 v4)

SPECfp2006 = 119

SPECfp\_base2006 = 113

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F618R2-FC0  
(X10DRFF-C , Intel Xeon E5-2680 v4)

SPECfp2006 = 119

SPECfp\_base2006 = 113

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Feb-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 30 12:43:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 April 2016.