



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp<sup>®</sup>2006 = **70.4**

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = **68.4**

CPU2006 license: 55


Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

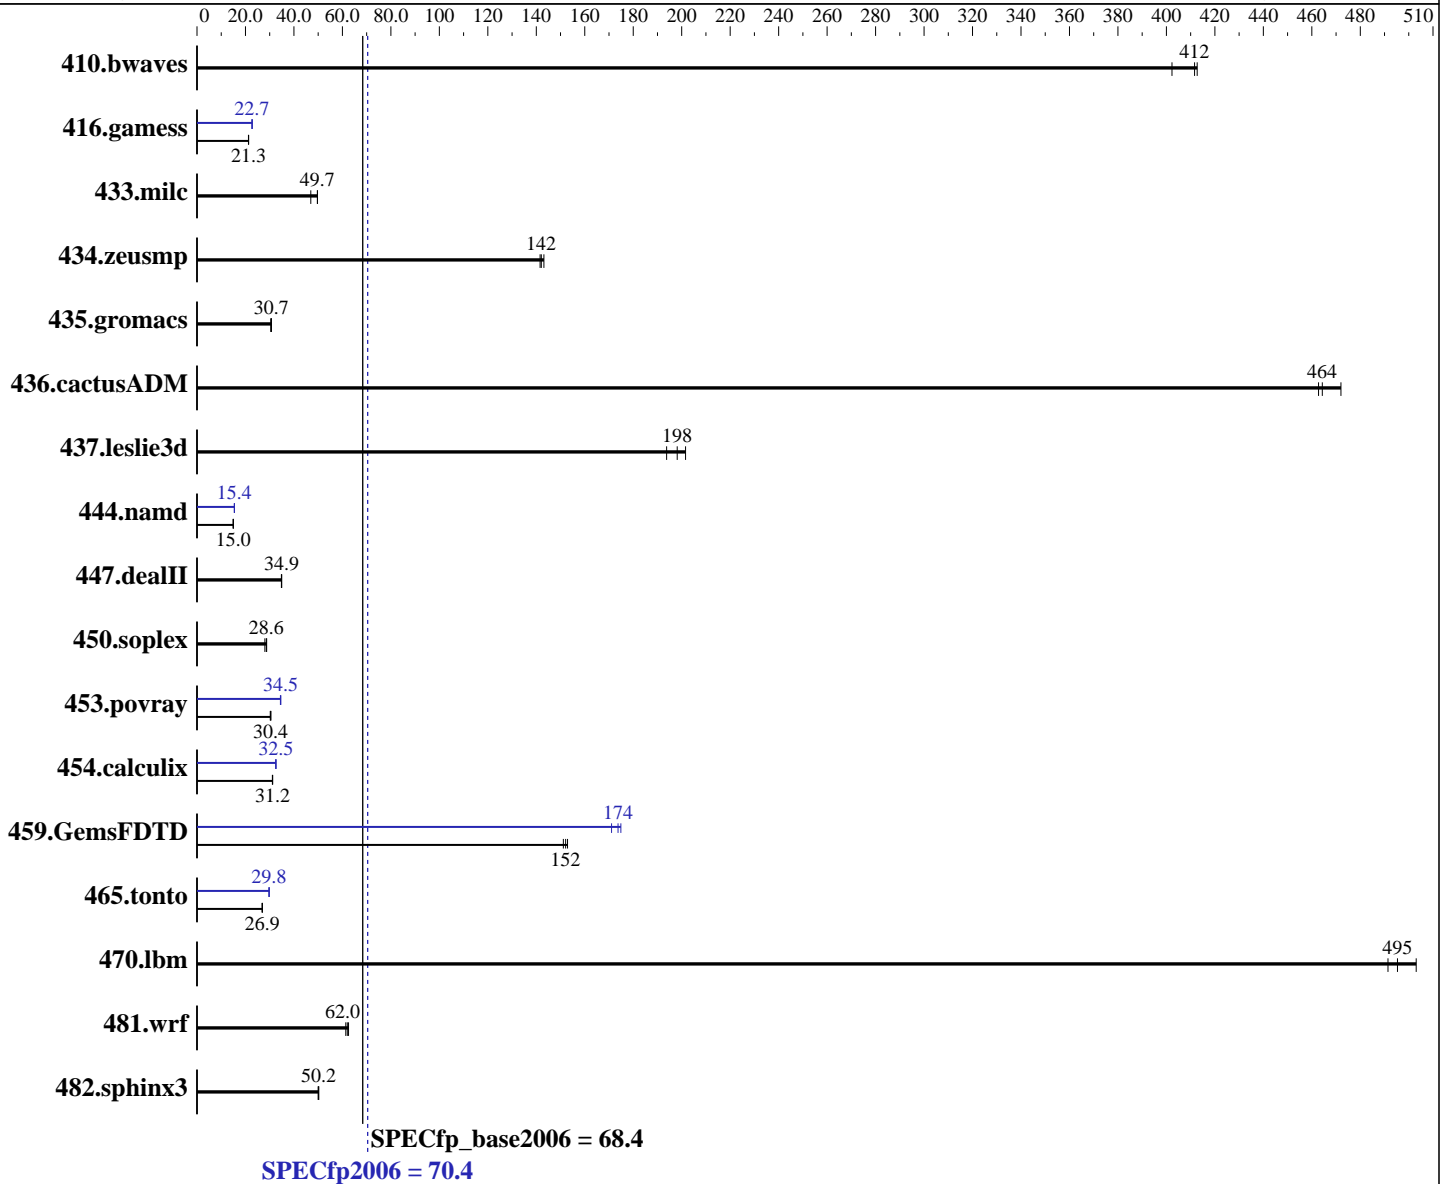

Hardware	Software
CPU Name: Intel Xeon E5-2609 v4	Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
CPU Characteristics: 1700	3.10.0-327.el7.x86_64
CPU MHz: 1700	Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
FPU: Integrated	Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip	Auto Parallel: Yes
CPU(s) orderable: 1,2 chip	File System: xfs
Primary Cache: 32 KB I + 32 KB D on chip per core	
Secondary Cache: 256 KB I+D on chip per core	
Continued on next page	Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 70.4

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = 68.4

CPU2006 license: 55

Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 500 GB 7200 RPM SATA  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	33.8	402	<b>33.0</b>	<b>412</b>	32.9	413	33.8	402	<b>33.0</b>	<b>412</b>	32.9	413
416.gamess	922	21.2	<b>920</b>	<b>21.3</b>	920	21.3	862	22.7	860	22.8	<b>861</b>	<b>22.7</b>
433.milc	<b>185</b>	<b>49.7</b>	195	47.0	185	49.7	<b>185</b>	<b>49.7</b>	195	47.0	185	49.7
434.zeusmp	<b>64.1</b>	<b>142</b>	63.6	143	64.3	142	<b>64.1</b>	<b>142</b>	63.6	143	64.3	142
435.gromacs	235	30.4	<b>233</b>	<b>30.7</b>	233	30.7	235	30.4	<b>233</b>	<b>30.7</b>	233	30.7
436.cactusADM	<b>25.7</b>	<b>464</b>	25.3	472	25.8	463	<b>25.7</b>	<b>464</b>	25.3	472	25.8	463
437.leslie3d	48.5	194	<b>47.4</b>	<b>198</b>	46.6	202	48.5	194	<b>47.4</b>	<b>198</b>	46.6	202
444.namd	536	15.0	536	15.0	<b>536</b>	<b>15.0</b>	<b>520</b>	<b>15.4</b>	520	15.4	520	15.4
447.dealII	327	34.9	329	34.8	<b>328</b>	<b>34.9</b>	327	34.9	329	34.8	<b>328</b>	<b>34.9</b>
450.soplex	298	28.0	290	28.7	<b>291</b>	<b>28.6</b>	298	28.0	290	28.7	<b>291</b>	<b>28.6</b>
453.povray	176	30.2	<b>175</b>	<b>30.4</b>	175	30.4	<b>154</b>	<b>34.5</b>	154	34.5	155	34.4
454.calculix	264	31.2	<b>265</b>	<b>31.2</b>	265	31.1	253	32.6	254	32.5	<b>253</b>	<b>32.5</b>
459.GemsFDTD	70.2	151	69.4	153	<b>69.8</b>	<b>152</b>	62.0	171	<b>61.1</b>	<b>174</b>	60.7	175
465.tonto	<b>365</b>	<b>26.9</b>	364	27.0	366	26.9	331	29.8	<b>331</b>	<b>29.8</b>	331	29.7
470.lbm	<b>27.7</b>	<b>495</b>	27.3	503	28.0	491	<b>27.7</b>	<b>495</b>	27.3	503	28.0	491
481.wrf	182	61.4	<b>180</b>	<b>62.0</b>	179	62.5	182	61.4	<b>180</b>	<b>62.0</b>	179	62.5
482.sphinx3	<b>388</b>	<b>50.2</b>	388	50.2	390	50.0	<b>388</b>	<b>50.2</b>	388	50.2	390	50.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Snoop Mode set to Opportunistic Snoop Broadcast  
 Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Energy Efficient Turbo disabled  
 Memory Patrol Scrub disabled  
 Cstates autonomous/C1E enabled  
 Energy Efficient Policy set to Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 70.4

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = 68.4

CPU2006 license: 55

Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Tue Mar 8 12:21:36 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v4@ 1.70GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264040556 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 8 03:19

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   256G  12G  245G  5% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 70.4

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = 68.4

CPU2006 license: 55

Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.0.1 02/12/2016

Memory:

16x 002C0632002C 18ASF2G72PDZ-2G3B1 16 GB 2 rank 2400 MHz, configured at 1866 MHz

8x Not Specified Not Specified

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 70.4

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = 68.4

CPU2006 license: 55

Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 70.4

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = 68.4

CPU2006 license: 55

Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 70.4

PowerEdge R630 (Intel Xeon E5-2609 v4, 1.70 GHz)

SPECfp\_base2006 = 68.4

CPU2006 license: 55

Test date: Mar-2016

Test sponsor: Dell Inc.

Hardware Availability: Mar-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Peak Optimization Flags (Continued)

465.tonto (continued):

`-opt-malloc-options=3 -auto -unroll4`

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Apr 5 14:55:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 April 2016.