



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**  
**SPECfp\_rate\_base2006 = 1090**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

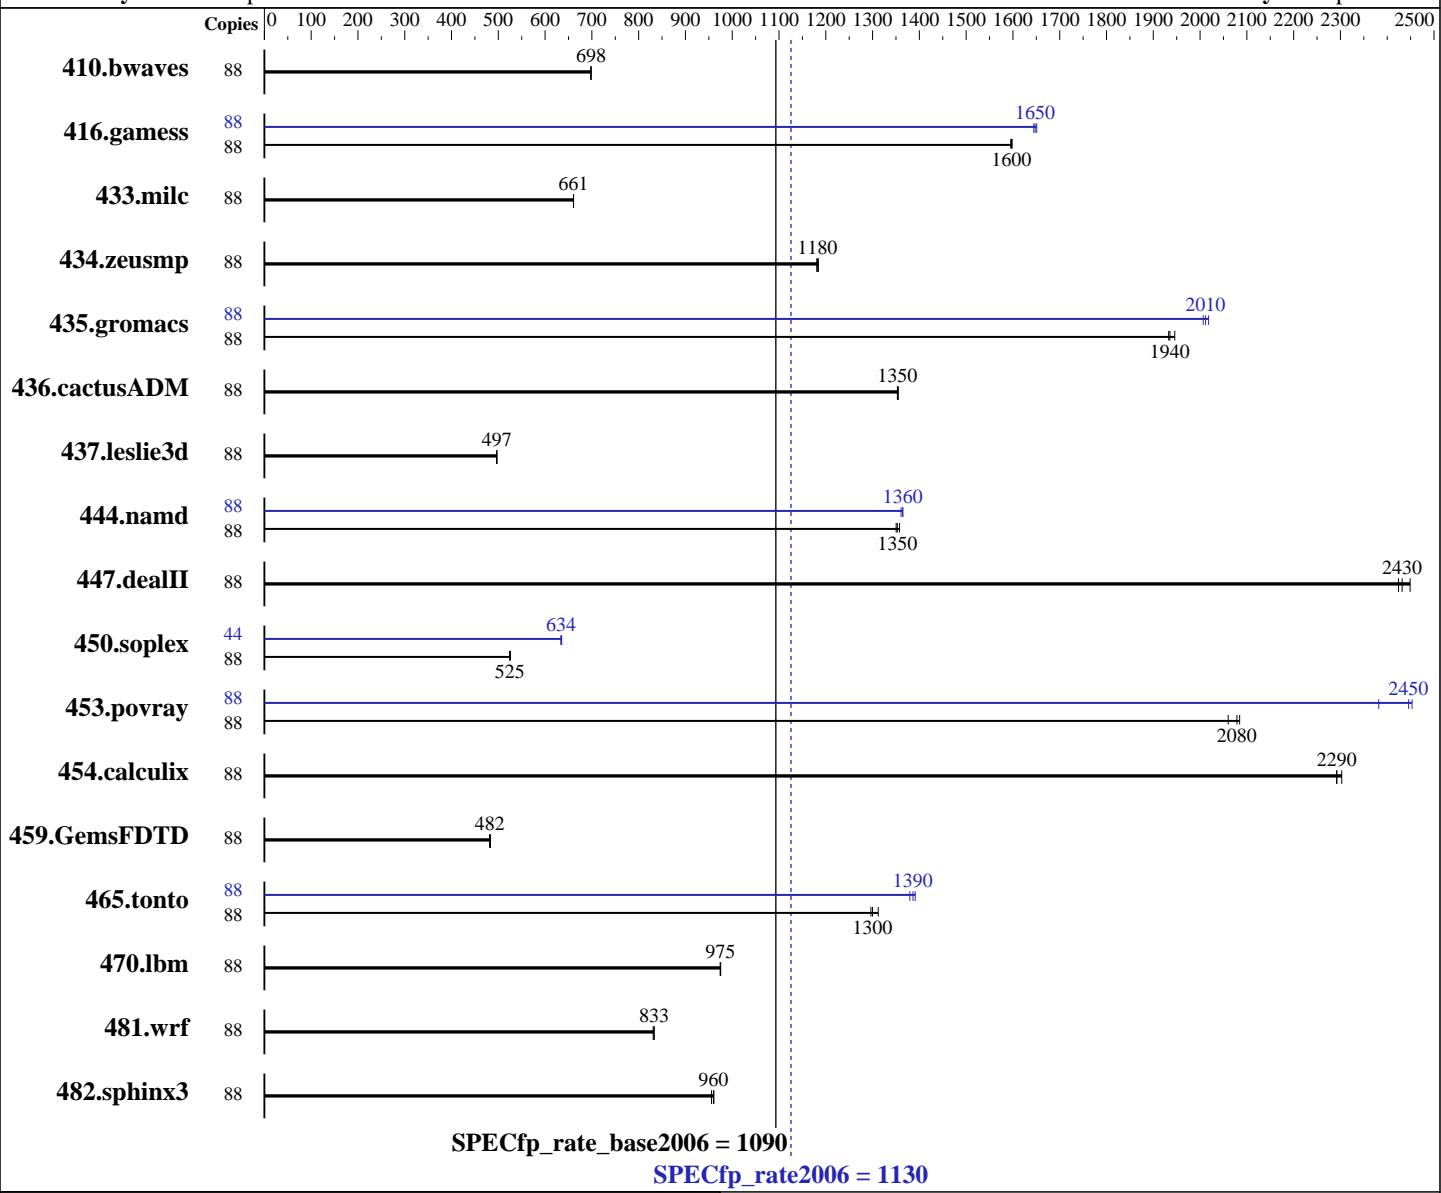

### Hardware

CPU Name: Intel Xeon E5-2699 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64)  
Compiler: Kernel 3.12.28-4-default  
Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE  
File System: for Linux;  
System State: Fortran: Version 16.0.0.101 of Intel Fortran  
Studio XE for Linux  
Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 001176

**Test date:** Apr-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2016

**Tested by:** Supermicro

**Software Availability:** Sep-2015

L3 Cache: 55 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 512 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	88	1714	698	1712	698	<b>1713</b>	<b>698</b>	88	1714	698	1712	698	<b>1713</b>	<b>698</b>
416.gamess	88	1078	1600	1080	1600	<b>1079</b>	<b>1600</b>	88	1044	1650	1048	1640	<b>1046</b>	<b>1650</b>
433.milc	88	<b>1223</b>	<b>661</b>	1222	661	1223	661	88	<b>1223</b>	<b>661</b>	1222	661	1223	<b>661</b>
434.zeusmp	88	<b>678</b>	<b>1180</b>	676	1180	678	1180	88	<b>678</b>	<b>1180</b>	676	1180	678	1180
435.gromacs	88	323	1950	325	1930	<b>325</b>	<b>1940</b>	88	<b>312</b>	<b>2010</b>	313	2010	311	2020
436.cactusADM	88	<b>777</b>	<b>1350</b>	776	1350	777	1350	88	<b>777</b>	<b>1350</b>	776	1350	777	1350
437.leslie3d	88	<b>1665</b>	<b>497</b>	1665	497	1666	496	88	<b>1665</b>	<b>497</b>	1665	497	1666	<b>496</b>
444.namd	88	520	1360	<b>522</b>	<b>1350</b>	523	1350	88	517	1360	<b>517</b>	<b>1360</b>	519	1360
447.dealII	88	415	2420	<b>414</b>	<b>2430</b>	411	2450	88	415	2420	<b>414</b>	<b>2430</b>	411	2450
450.soplex	88	1396	526	1400	524	<b>1399</b>	<b>525</b>	44	579	634	<b>578</b>	<b>634</b>	577	636
453.povray	88	225	2080	227	2060	<b>225</b>	<b>2080</b>	88	197	2380	<b>191</b>	<b>2450</b>	191	2450
454.calculix	88	<b>317</b>	<b>2290</b>	315	2300	317	2290	88	<b>317</b>	<b>2290</b>	315	2300	317	2290
459.GemsFDTD	88	1932	483	<b>1937</b>	<b>482</b>	1939	482	88	1932	483	<b>1937</b>	<b>482</b>	1939	482
465.tonto	88	<b>666</b>	<b>1300</b>	668	1300	660	1310	88	622	1390	628	1380	<b>625</b>	<b>1390</b>
470.lbm	88	1241	974	1240	975	<b>1241</b>	<b>975</b>	88	1241	974	1240	975	<b>1241</b>	<b>975</b>
481.wrf	88	1183	831	1180	833	<b>1180</b>	<b>833</b>	88	1183	831	1180	833	<b>1180</b>	<b>833</b>
482.sphinx3	88	1785	961	1795	956	<b>1787</b>	<b>960</b>	88	1785	961	1795	956	<b>1787</b>	<b>960</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
COD Enable = Enable  
Early Snoop = Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 001176

**Test date:** Apr-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2016

**Tested by:** Supermicro

**Software Availability:** Sep-2015

## Platform Notes (Continued)

Home Dir Snoop with IVT- Style OSB = Disable  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-qgft Thu Apr 14 22:15:05 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 11
    siblings   : 22
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
    28
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
    28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      264433764 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 0
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-qgft 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 14 22:10
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

## Platform Notes (Continued)

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	465G	157G	309G	34%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

8x NO DIMM	NO DIMM
16x Samsung M393A2G40DB1-CRC	16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

CPU2006 license: 001176

Test date: Apr-2016

Test sponsor: Supermicro

Hardware Availability: Mar-2016

Tested by: Supermicro

Software Availability: Sep-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes  
470.lbm: basepeak = yes  
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 001176

**Test date:** Apr-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2016

**Tested by:** Supermicro

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 2028R-C1RT4+  
(X10DRC-T4+, Intel Xeon E5-2699 v4)

**SPECfp\_rate2006 = 1130**

**SPECfp\_rate\_base2006 = 1090**

**CPU2006 license:** 001176

**Test date:** Apr-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2016

**Tested by:** Supermicro

**Software Availability:** Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 3 18:00:26 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 May 2016.