



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp®\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

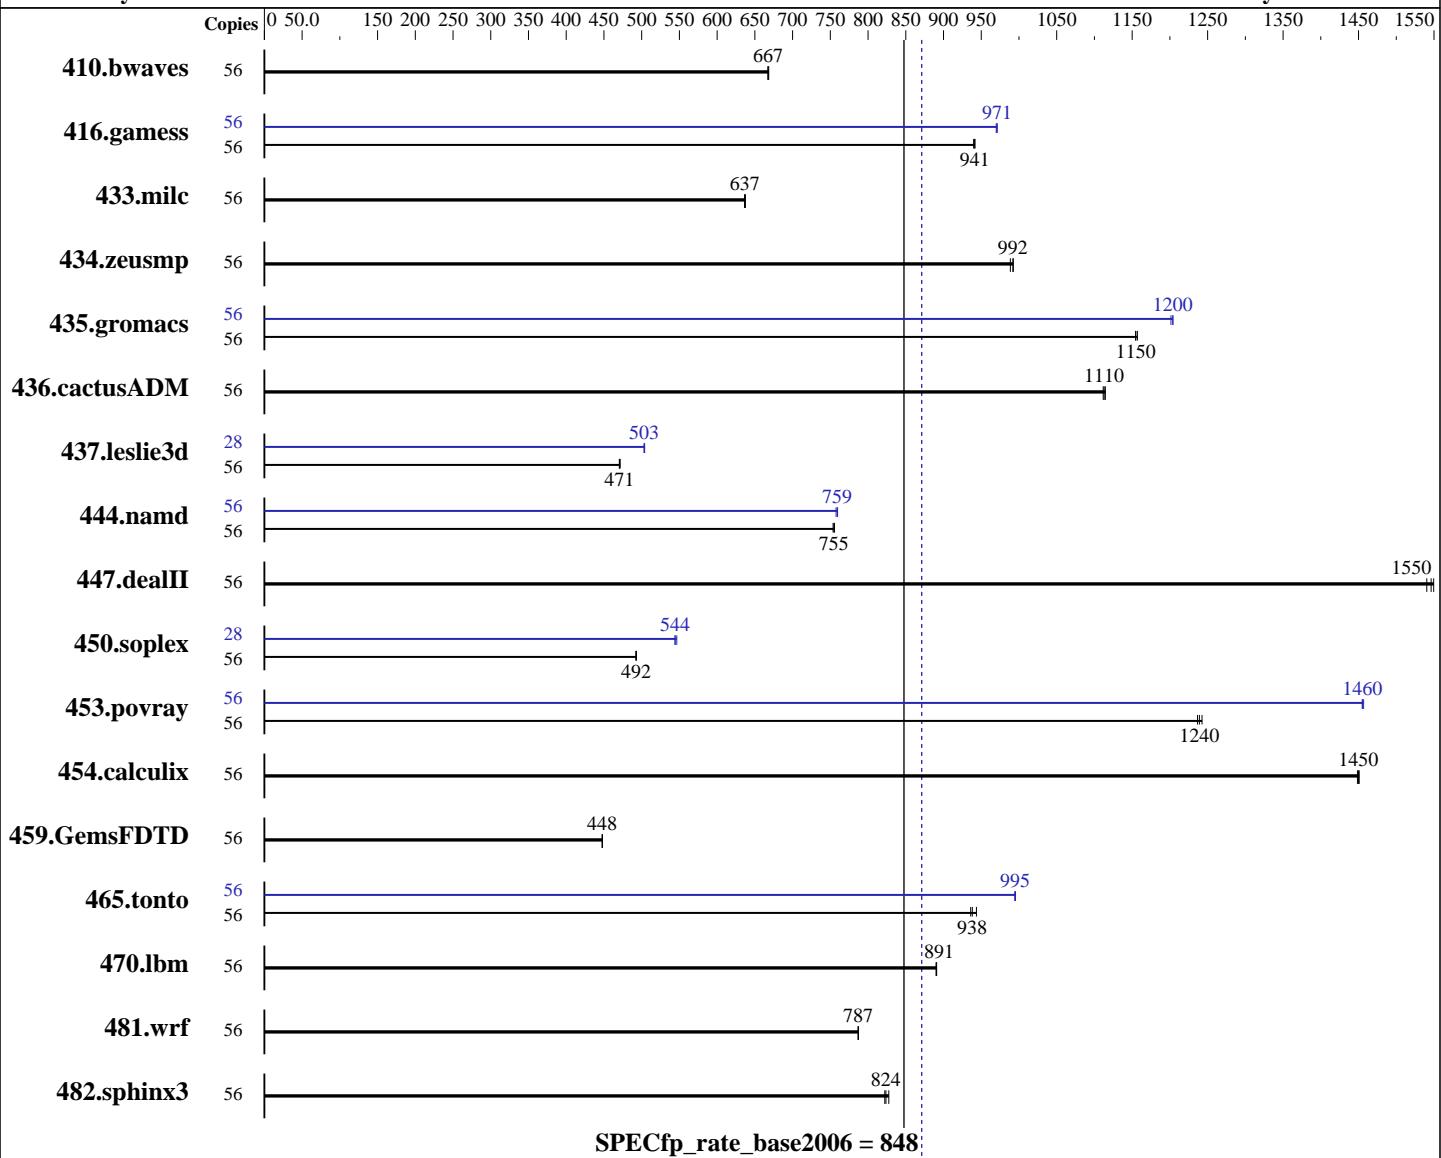

**SPECfp\_rate\_base2006 = 848**

**SPECfp\_rate2006 = 871**

## Hardware

CPU Name: Intel Xeon E5-2660 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
Compiler: Kernel 3.10.0-327.el7.x86\_64  
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test date:** Apr-2016

**Test sponsor:** HPE

**Hardware Availability:** Mar-2016

**Tested by:** HPE

**Software Availability:** Nov-2015

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	<b>1140</b>	<b>667</b>	1140	667	1139	668	56	<b>1140</b>	<b>667</b>	1140	667	1139	668
416.gamess	56	1167	940	1164	942	<b>1165</b>	<b>941</b>	56	1131	970	1129	971	<b>1129</b>	<b>971</b>
433.milc	56	<b>807</b>	<b>637</b>	808	636	807	637	56	<b>807</b>	<b>637</b>	808	636	807	637
434.zeusmp	56	513	992	<b>514</b>	<b>992</b>	515	989	56	513	992	<b>514</b>	<b>992</b>	515	989
435.gromacs	56	<b>346</b>	<b>1150</b>	346	1160	346	1150	56	333	1200	332	1200	<b>332</b>	<b>1200</b>
436.cactusADM	56	602	1110	<b>601</b>	<b>1110</b>	600	1110	56	602	1110	<b>601</b>	<b>1110</b>	600	1110
437.leslie3d	56	1119	470	1116	471	<b>1118</b>	<b>471</b>	28	523	503	522	504	<b>523</b>	<b>503</b>
444.namd	56	596	754	<b>595</b>	<b>755</b>	594	756	56	593	758	591	760	<b>592</b>	<b>759</b>
447.dealII	56	416	1540	<b>414</b>	<b>1550</b>	413	1550	56	416	1540	<b>414</b>	<b>1550</b>	413	1550
450.soplex	56	948	492	947	493	<b>948</b>	<b>492</b>	28	427	547	<b>429</b>	<b>544</b>	429	544
453.povray	56	240	1240	241	1240	<b>240</b>	<b>1240</b>	56	205	1450	205	1460	<b>205</b>	<b>1460</b>
454.calculix	56	318	1450	319	1450	<b>319</b>	<b>1450</b>	56	318	1450	319	1450	<b>319</b>	<b>1450</b>
459.GemsFDTD	56	<b>1327</b>	<b>448</b>	1326	448	1327	448	56	<b>1327</b>	<b>448</b>	1326	448	1327	448
465.tonto	56	584	944	<b>587</b>	<b>938</b>	589	936	56	554	995	554	995	<b>554</b>	<b>995</b>
470.lbm	56	<b>864</b>	<b>891</b>	864	890	864	891	56	<b>864</b>	<b>891</b>	864	890	864	891
481.wrf	56	<b>795</b>	<b>787</b>	795	787	794	787	56	<b>795</b>	<b>787</b>	795	787	794	787
482.sphinx3	56	<b>1325</b>	<b>824</b>	1319	828	1328	822	56	<b>1325</b>	<b>824</b>	1319	828	1328	822

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes

### BIOS Configuration:

Power Profile set to Maximum Peformance  
QPI Snoop Configuration set to Cluster on Die  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Double Refresh Rate set to 1x Refresh

```
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on Pilot-XL420-G9 Tue Apr 26 13:41:39 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 v4@ 2.00GHz
        2 "physical id"s (chips)
        56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 14
        siblings : 28
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      263887532 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux Pilot-XL420-G9 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT
2015 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes (Continued)

run-level 3 Apr 26 00:39

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	361G	21G	322G	7%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U19 04/12/2016

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/lib32:/cpu2006/lib64:/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Compiler Invocation (Continued)

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -static(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -static(pass 2)
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -static(pass 2)
             -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
             -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
             -unroll2 -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

```
437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
               -opt-malloc-options=3 -opt-prefetch
```

459.GemsFDTD: basepeak = yes

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
             -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -static(pass 2)
              -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

**SPECfp\_rate2006 = 871**

**SPECfp\_rate\_base2006 = 848**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 17 16:51:13 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 May 2016.