



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp®2006 =

106

SPECfp_base2006 =

99.7

CPU2006 license: 3

Test sponsor: HPE


Tested by: HPE

Test date:

May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

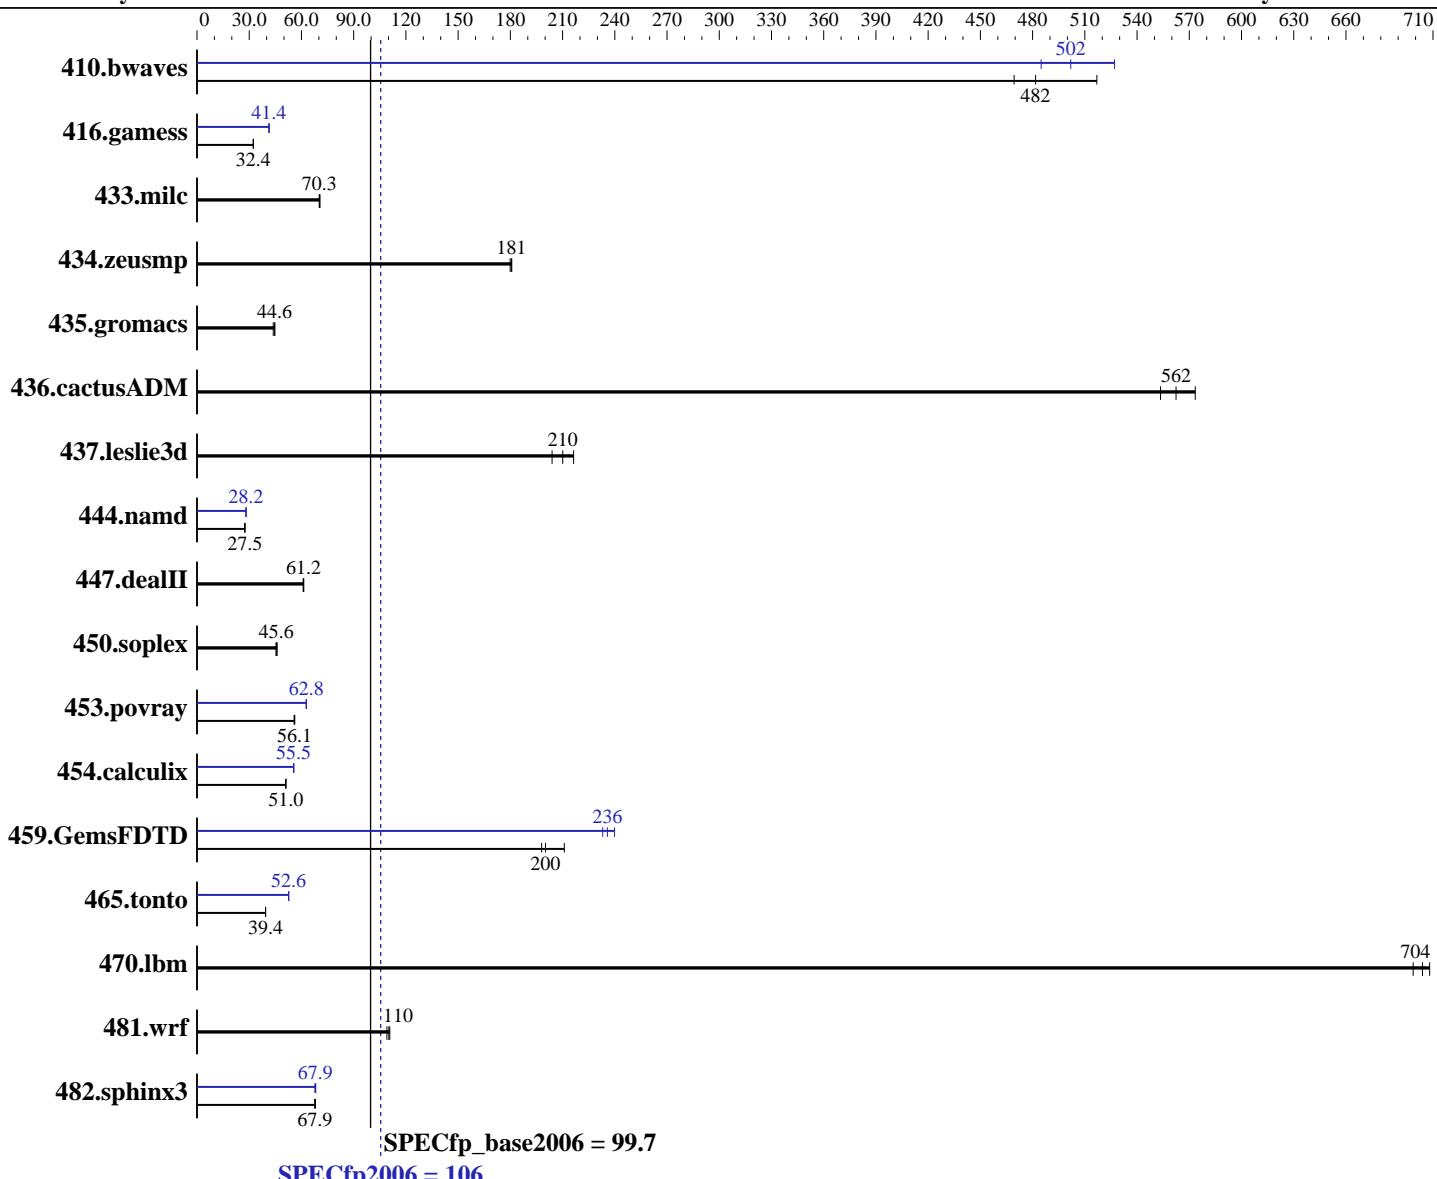

Hardware

CPU Name: Intel Xeon E5-2630 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant ML350 Gen9
(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp2006 = 106

SPECfp_base2006 = 99.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R,
running at 2133 MHz)
Disk Subsystem: 1 x 800 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	28.2	482	29.0	469	26.3	517	28.0	485	25.8	527	27.1	502
416.gamess	605	32.4	605	32.3	605	32.4	473	41.4	473	41.4	473	41.4
433.milc	131	70.2	130	70.7	131	70.3	131	70.2	130	70.7	131	70.3
434.zeusmp	50.4	181	50.6	180	50.3	181	50.4	181	50.6	180	50.3	181
435.gromacs	163	43.8	160	44.7	160	44.6	163	43.8	160	44.7	160	44.6
436.cactusADM	21.6	553	20.8	573	21.2	562	21.6	553	20.8	573	21.2	562
437.leslie3d	43.5	216	44.7	210	46.1	204	43.5	216	44.7	210	46.1	204
444.namd	292	27.5	292	27.5	292	27.5	285	28.2	285	28.2	285	28.2
447.dealII	188	61.0	187	61.3	187	61.2	188	61.0	187	61.3	187	61.2
450.soplex	181	46.0	183	45.6	184	45.4	181	46.0	183	45.6	184	45.4
453.povray	95.4	55.8	94.9	56.1	94.8	56.1	84.7	62.8	84.9	62.7	84.6	62.9
454.calculix	162	51.0	162	51.0	162	51.0	149	55.5	149	55.4	148	55.7
459.GemsFDTD	50.3	211	53.6	198	53.0	200	45.5	233	45.0	236	44.2	240
465.tonto	250	39.4	250	39.4	250	39.4	187	52.6	187	52.7	187	52.6
470.lbm	19.5	704	19.4	708	19.7	699	19.5	704	19.4	708	19.7	699
481.wrf	101	110	102	109	101	111	101	110	102	109	101	111
482.sphinx3	287	67.9	286	68.0	288	67.6	286	68.2	287	67.8	287	67.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:

Intel Hyperthreading Option set to Enabled

Power Profile set to Custom

Power Regulator set to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C1E State

Minimum Processor Idle Power Package C-State set to No Package State

Collaborative Power Control set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp2006 =

106

SPECfp_base2006 =

99.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

QPI Snoop Configuration set to Home Snoop

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Double Refresh Rate set to 1x Refresh

Energy Performance Bias set to Maximum Performance

Sysinfo program

```
/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fb8667b5a285932ceab81e28219e1
running on linux-7m51 Sat May 21 07:31:57 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      529092452 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

From /etc/*release* /etc/*version*

```
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp2006 =

106

SPECfp_base2006 =

99.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
uname -a:
Linux linux-7m51 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 21 07:31
```

```
SPEC is set to: /home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   703G  236G  468G  34%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P92 04/12/2016

Memory:

8x UNKNOWN NOT AVAILABLE

16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz, configured at 2133 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

OMP_NUM_THREADS = "20"

LD_LIBRARY_PATH = "/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/lib32:/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/lib64:/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp2006 =

106

SPECfp_base2006 =

99.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint
-fp-model fast=2
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant ML350 Gen9
(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp2006 = 106

SPECfp_base2006 = 99.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias
-fp-model fast=2
-qopt-prefetch-issue-excl-hint -funroll-all-loops

-nofor-main

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint -funroll-all-loops

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.20 GHz, Intel Xeon E5-2630 v4)

SPECfp2006 =

106

SPECfp_base2006 =

99.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 14:06:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 June 2016.