



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

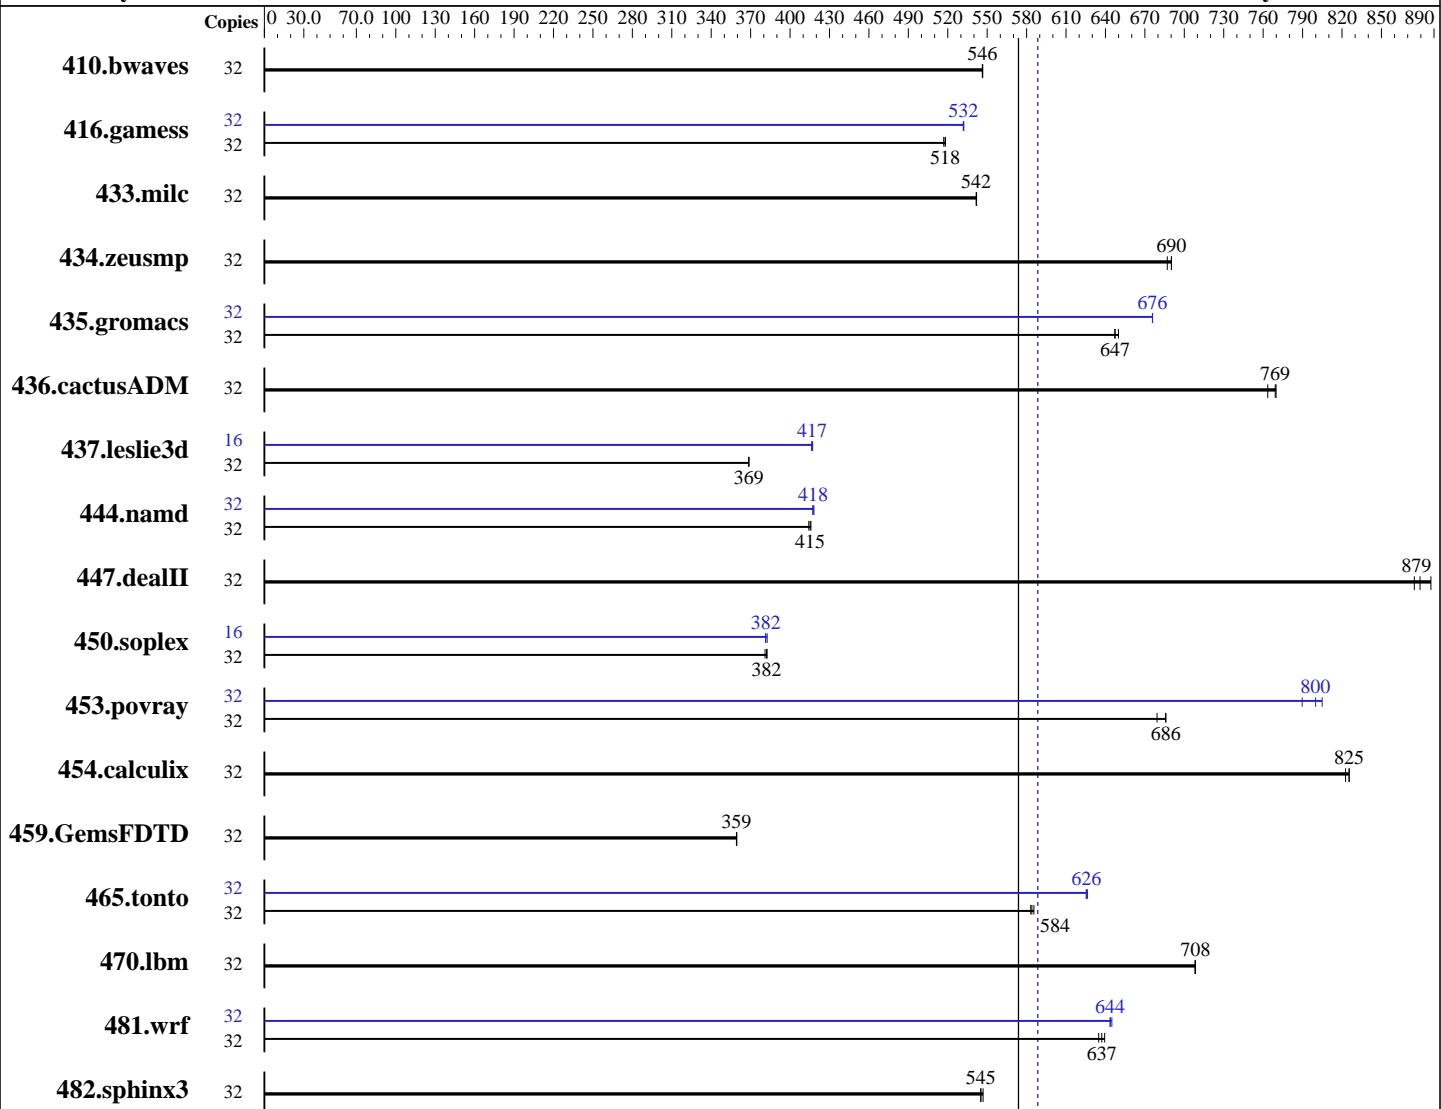

**SPECfp\_rate\_base2006 = 574**

**SPECfp\_rate2006 = 588**

## Hardware

CPU Name: Intel Xeon E5-2620 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2, (Maipo)  
Compiler: Kernel 3.10.0-229.el7.x86\_64  
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

**CPU2006 license:** 3

**Test date:** May-2016

**Test sponsor:** HPE

**Hardware Availability:** Mar-2016

**Tested by:** HPE

**Software Availability:** Nov-2015

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R,  
running at 2133 MHz)  
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>796</b>	<b>546</b>	796	546	796	547	32	<b>796</b>	<b>546</b>	796	546	796	547
416.gamess	32	<b>1210</b>	<b>518</b>	1212	517	1209	518	32	<b>1178</b>	<b>532</b>	1178	532	1177	532
433.milc	32	542	542	<b>542</b>	<b>542</b>	542	542	32	542	542	<b>542</b>	<b>542</b>	542	542
434.zeusmp	32	422	690	424	687	<b>422</b>	<b>690</b>	32	422	690	424	687	<b>422</b>	<b>690</b>
435.gromacs	32	352	650	<b>353</b>	<b>647</b>	353	647	32	338	676	338	676	<b>338</b>	<b>676</b>
436.cactusADM	32	<b>497</b>	<b>769</b>	501	763	497	770	32	<b>497</b>	<b>769</b>	501	763	497	770
437.leslie3d	32	816	369	816	369	<b>816</b>	<b>369</b>	16	<b>361</b>	<b>417</b>	361	416	360	417
444.namd	32	620	414	<b>618</b>	<b>415</b>	617	416	32	<b>615</b>	<b>418</b>	614	418	<b>615</b>	417
447.dealII	32	<b>416</b>	<b>879</b>	412	888	418	875	32	<b>416</b>	<b>879</b>	412	888	418	875
450.soplex	32	<b>698</b>	<b>382</b>	698	382	700	381	16	349	383	<b>350</b>	<b>382</b>	350	381
453.povray	32	<b>248</b>	<b>686</b>	248	686	251	679	32	216	790	<b>213</b>	<b>800</b>	212	805
454.calculix	32	320	825	321	823	<b>320</b>	<b>825</b>	32	320	825	321	823	<b>320</b>	<b>825</b>
459.GemsFDTD	32	945	359	<b>945</b>	<b>359</b>	945	359	32	945	359	<b>945</b>	<b>359</b>	945	359
465.tonto	32	<b>539</b>	<b>584</b>	538	586	540	583	32	504	625	<b>503</b>	<b>626</b>	503	626
470.lbm	32	<b>621</b>	<b>708</b>	621	708	621	709	32	<b>621</b>	<b>708</b>	621	708	621	709
481.wrf	32	559	639	<b>561</b>	<b>637</b>	563	635	32	555	644	554	645	<b>555</b>	<b>644</b>
482.sphinx3	32	1144	545	1140	547	<b>1144</b>	<b>545</b>	32	1144	545	1140	547	<b>1144</b>	<b>545</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes

### BIOS Configuration:

Power Profile set to Maximum Performance  
QPI Snoop Configuration set to Cluster on Die  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1  
running on mvb-xl420-g9 Fri May 20 14:08:48 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7  
cache size : 20480 KB

From /proc/meminfo  
MemTotal: 263710788 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.2 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="7.2"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"  
ANSI\_COLOR="0;31"  
CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.2:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.2:ga:server

uname -a:  
Linux mvb-xl420-g9 3.10.0-327.el7.x86\_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015  
x86\_64 x86\_64 x86\_64 GNU/Linux

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes (Continued)

run-level 3 May 20 12:56

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda4 xfs 364G 21G 344G 6% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U19 03/10/2016

Memory:

16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-fp-model fast=2 -auto-ilp32 -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
  450.soplex: -D_FILE_OFFSET_BITS=64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -static(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
  -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
  -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
  -par-num-threads=1(pass 1) -static(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

450.soplex (continued):

-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-unroll12 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL420 Gen9  
(2.10 GHz, Intel Xeon E5-2620 v4)

**SPECfp\_rate2006 = 588**

**SPECfp\_rate\_base2006 = 574**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 14:06:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 June 2016.