



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 1500**

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 1480**

CPU2006 license: 55


Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

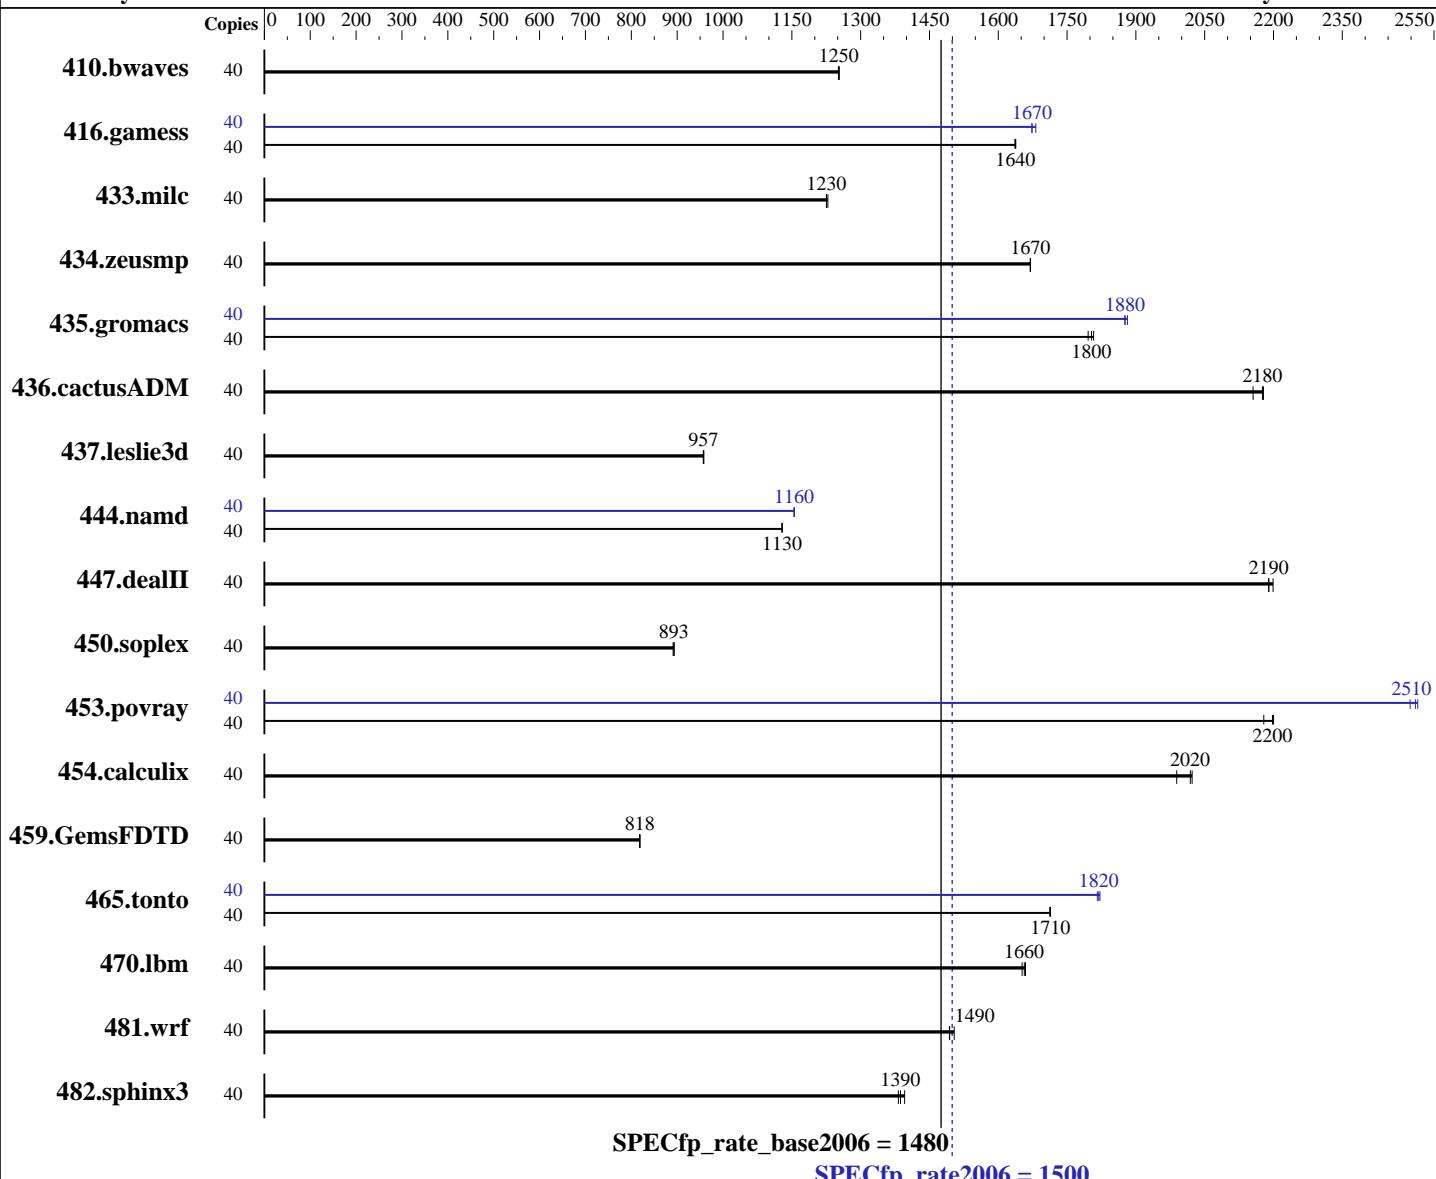

**SPECfp\_rate\_base2006 = 1480**

**SPECfp\_rate2006 = 1500**

## Hardware

CPU Name: Intel Xeon E5-4627 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: btrfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1500**

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 1480**

**CPU2006 license:** 55

**Test date:** May-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	434	1250	434	1250	<b><u>434</u></b>	<b><u>1250</u></b>	40	434	1250	434	1250	<b><u>434</u></b>	<b><u>1250</u></b>
416.gamess	40	<b><u>478</u></b>	<b><u>1640</u></b>	478	1640	479	1640	40	468	1670	466	1680	<b><u>468</u></b>	<b><u>1670</u></b>
433.milc	40	<b><u>300</u></b>	<b><u>1230</u></b>	300	1230	299	1230	40	<b><u>300</u></b>	<b><u>1230</u></b>	300	1230	299	1230
434.zeusmp	40	218	1670	218	1670	<b><u>218</u></b>	<b><u>1670</u></b>	40	218	1670	218	1670	<b><u>218</u></b>	<b><u>1670</u></b>
435.gromacs	40	159	1800	158	1810	<b><u>158</u></b>	<b><u>1800</u></b>	40	152	1880	152	1880	<b><u>152</u></b>	<b><u>1880</u></b>
436.cactusADM	40	<b><u>220</u></b>	<b><u>2180</u></b>	222	2160	219	2180	40	<b><u>220</u></b>	<b><u>2180</u></b>	222	2160	219	2180
437.leslie3d	40	393	957	392	958	<b><u>393</u></b>	<b><u>957</u></b>	40	393	957	392	958	<b><u>393</u></b>	<b><u>957</u></b>
444.namd	40	284	1130	284	1130	<b><u>284</u></b>	<b><u>1130</u></b>	40	278	1160	<b><u>278</u></b>	<b><u>1160</u></b>	278	1150
447.dealII	40	209	2190	208	2200	<b><u>209</u></b>	<b><u>2190</u></b>	40	209	2190	208	2200	<b><u>209</u></b>	<b><u>2190</u></b>
450.soplex	40	373	893	<b><u>374</u></b>	<b><u>893</u></b>	374	891	40	373	893	<b><u>374</u></b>	<b><u>893</u></b>	374	891
453.povray	40	96.7	2200	<b><u>96.8</u></b>	<b><u>2200</u></b>	97.7	2180	40	<b><u>84.8</u></b>	<b><u>2510</u></b>	84.6	2510	85.2	2500
454.calculix	40	166	1990	<b><u>163</u></b>	<b><u>2020</u></b>	163	2020	40	166	1990	<b><u>163</u></b>	<b><u>2020</u></b>	163	2020
459.GemsFDTD	40	519	818	<b><u>519</u></b>	<b><u>818</u></b>	518	819	40	519	818	<b><u>519</u></b>	<b><u>818</u></b>	518	819
465.tonto	40	230	1710	<b><u>230</u></b>	<b><u>1710</u></b>	230	1710	40	217	1820	216	1820	<b><u>216</u></b>	<b><u>1820</u></b>
470.lbm	40	331	1660	<b><u>332</u></b>	<b><u>1660</u></b>	333	1650	40	331	1660	<b><u>332</u></b>	<b><u>1660</u></b>	333	1650
481.wrf	40	297	1500	299	1490	<b><u>299</u></b>	<b><u>1490</u></b>	40	297	1500	299	1490	<b><u>299</u></b>	<b><u>1490</u></b>
482.sphinx3	40	564	1380	558	1400	<b><u>562</u></b>	<b><u>1390</u></b>	40	564	1380	558	1400	<b><u>562</u></b>	<b><u>1390</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Snoop Mode set to Home Snoop

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1500**

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 1480**

**CPU2006 license:** 55

**Test date:** May-2016

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jun-2016

**Tested by:** Dell Inc.

**Software Availability:** Mar-2016

## Platform Notes (Continued)

System Profile set to custom  
CPU Performance set to Hardware P States  
C States set to Autonomous  
C1E disabled  
Energy Efficient Turbo disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Balanced Performance  
Memory Patrol Scrub disabled  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-t2sb Tue May 10 12:42:18 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-4627 v4 @ 2.60GHz  
 4 "physical id"s (chips)  
 40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 10  
 siblings : 10  
 physical 0: cores 0 1 2 3 4 8 9 10 11 12  
 physical 1: cores 0 1 2 3 4 8 9 10 11 12  
 physical 2: cores 0 1 2 3 4 8 9 10 11 12  
 physical 3: cores 0 1 2 3 4 8 9 10 11 12  
cache size : 25600 KB

From /proc/meminfo  
MemTotal: 529326752 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP1

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
 SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 1  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
 NAME="SLES"  
 VERSION="12-SP1"  
 VERSION\_ID="12.1"  
 PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1500**

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 1480**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:  
Linux linux-t2sb 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 10 06:40
```

```
SPEC is set to: /root/cpu2006-1.2  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda3        btrfs  461G  9.5G  447G   3% /  
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.0.0 04/26/2016
```

Memory:

```
31x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz  
1x 00CE00B300CE M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz  
16x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1500**

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 1480**

CPU2006 license: 55

Test date: May-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Mar-2016

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECfp\_rate2006 = 1500**

**SPECfp\_rate\_base2006 = 1480**

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 1500**

PowerEdge R830 (Intel Xeon E5-4627 v4, 2.60 GHz)

**SPECfp\_rate\_base2006 = 1480**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:30:30 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.