



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

**SPECint®\_rate2006 = 1040**

Express5800/B120g-h (Intel Xeon E5-2650 v4)

**SPECint\_rate\_base2006 = 989**

CPU2006 license: 9006


Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

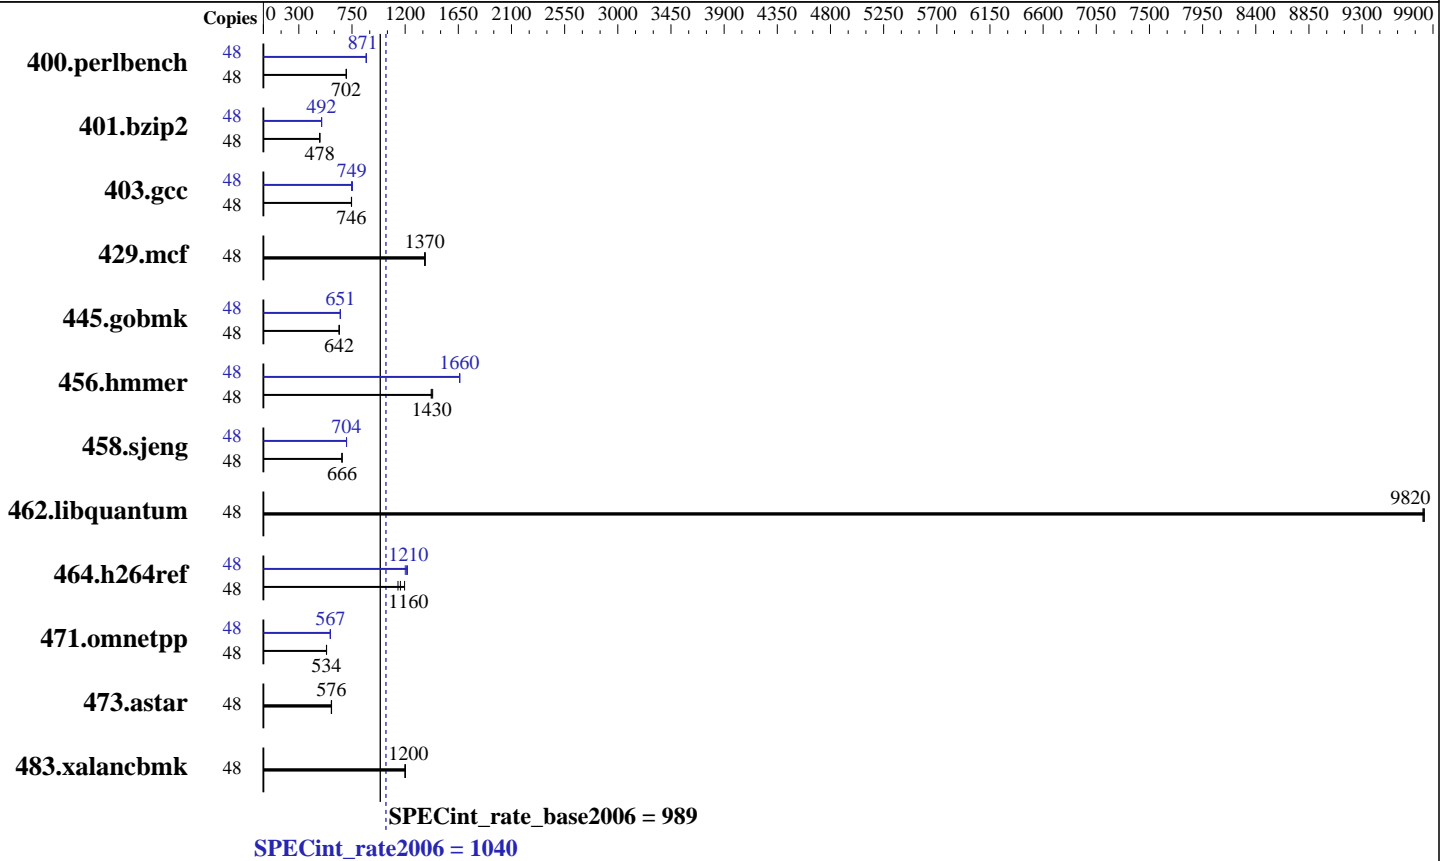

### Hardware

CPU Name: Intel Xeon E5-2650 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 400 GB SATA, SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Kernel 3.10.0-327.4.5.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint\_rate2006 = 1040

Express5800/B120g-h (Intel Xeon E5-2650 v4)

SPECint\_rate\_base2006 = 989

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	<b>668</b>	<b>702</b>	669	701	667	703	48	<b>538</b>	<b>871</b>	539	870	538	872
401.bzip2	48	974	476	<b>969</b>	<b>478</b>	969	478	48	<b>941</b>	<b>492</b>	939	493	941	492
403.gcc	48	518	746	519	745	<b>518</b>	<b>746</b>	48	517	747	<b>516</b>	<b>749</b>	513	754
429.mcf	48	<b>320</b>	<b>1370</b>	321	1370	319	1370	48	<b>320</b>	<b>1370</b>	321	1370	319	1370
445.gobmk	48	784	642	<b>784</b>	<b>642</b>	784	642	48	<b>773</b>	<b>651</b>	774	651	773	652
456.hammer	48	<b>314</b>	<b>1430</b>	313	1430	315	1420	48	<b>270</b>	<b>1660</b>	270	1660	269	1660
458.sjeng	48	873	665	872	666	<b>872</b>	<b>666</b>	48	825	704	<b>825</b>	<b>704</b>	826	703
462.libquantum	48	<b>101</b>	<b>9820</b>	101	9820	101	9830	48	<b>101</b>	<b>9820</b>	101	9820	101	9830
464.h264ref	48	<b>916</b>	<b>1160</b>	889	1200	932	1140	48	<b>878</b>	<b>1210</b>	885	1200	871	1220
471.omnetpp	48	562	534	561	535	<b>561</b>	<b>534</b>	48	<b>529</b>	<b>567</b>	530	566	529	568
473.astar	48	586	575	584	577	<b>585</b>	<b>576</b>	48	586	575	584	577	<b>585</b>	<b>576</b>
483.xalancbmk	48	<b>276</b>	<b>1200</b>	276	1200	275	1200	48	<b>276</b>	<b>1200</b>	276	1200	275	1200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance  
Patrol Scrub: Disabled  
Cluster on Die: Enabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 1040

Express5800/B120g-h (Intel Xeon E5-2650 v4)

SPECint\_rate\_base2006 = 989

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 1040**

Express5800/B120g-h (Intel Xeon E5-2650 v4)

**SPECint\_rate\_base2006 = 989**

**CPU2006 license:** 9006

**Test date:** Feb-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jun-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 1040

Express5800/B120g-h (Intel Xeon E5-2650 v4)

SPECint\_rate\_base2006 = 989

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

## Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120g-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120g-RevB.xml>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 1040

Express5800/B120g-h (Intel Xeon E5-2650 v4)

SPECint\_rate\_base2006 = 989

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2016

Hardware Availability: Jun-2016

Software Availability: Jan-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 12 11:03:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 July 2016.