



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

**SPECfp®\_rate2006 = 619**

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate\_base2006 = 607**

CPU2006 license: 9066


Test date: Jun-2016

Test sponsor: H3C

Hardware Availability: Jun-2016

Tested by: H3C

Software Availability: Jun-2016

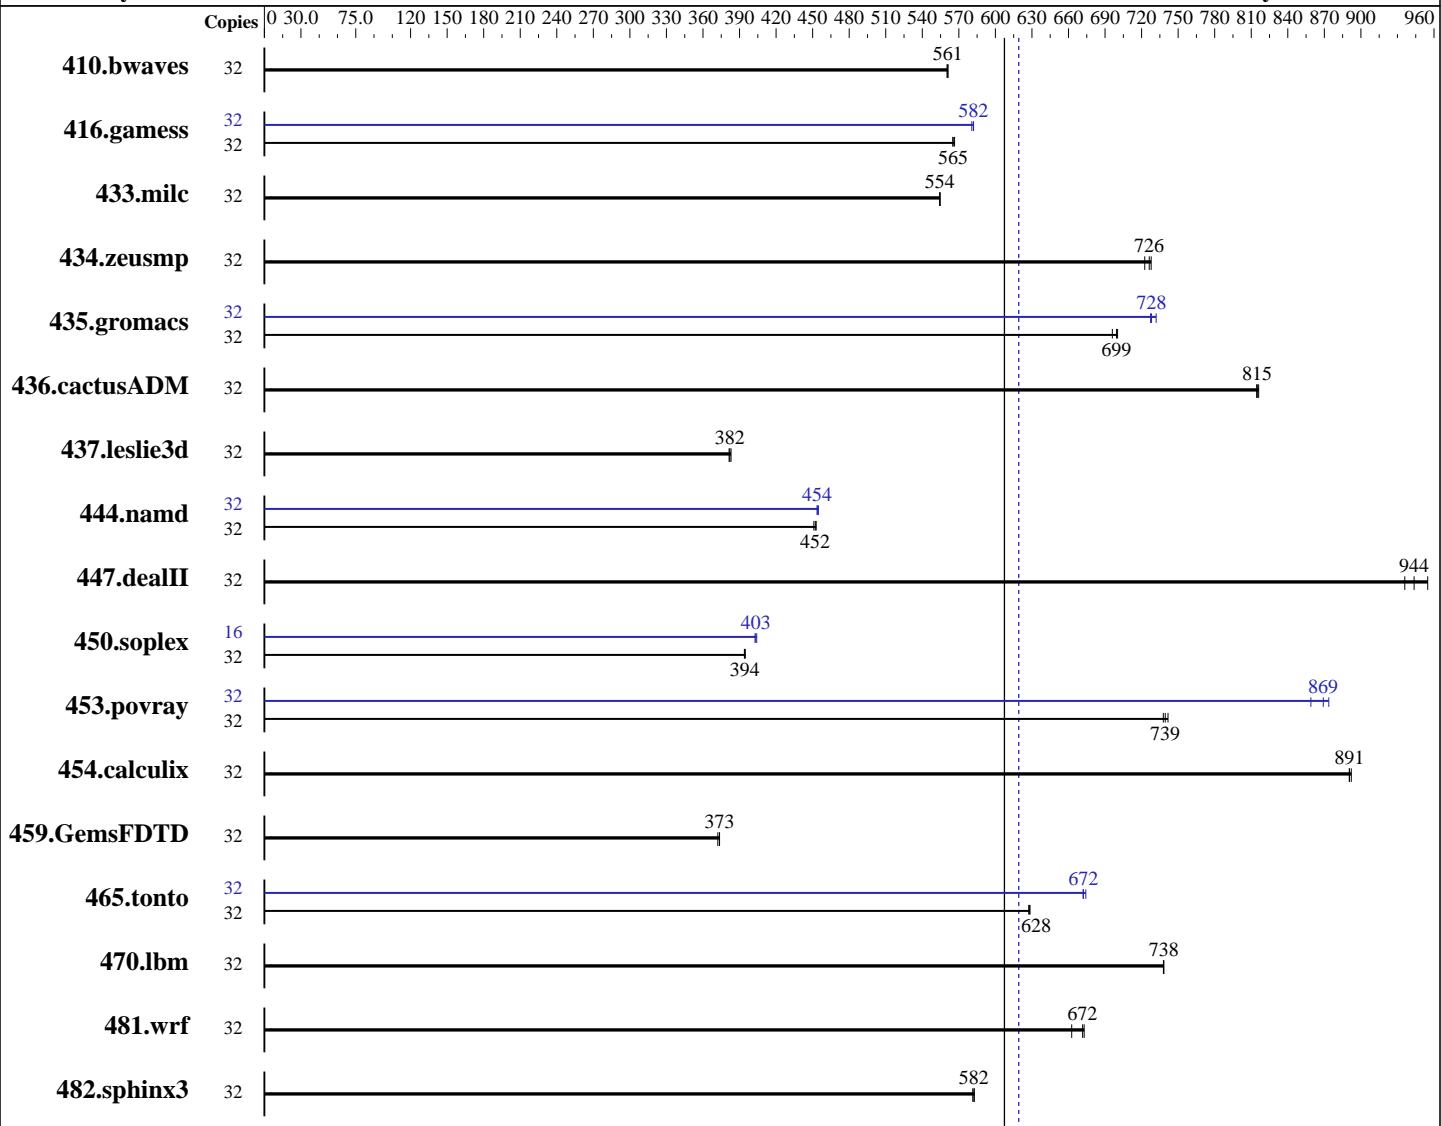

**SPECfp\_rate\_base2006 = 607**

**SPECfp\_rate2006 = 619**

## Hardware

CPU Name: Intel Xeon E5-2620 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

**SPECfp\_rate2006 = 619**

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9066

**Test date:** Jun-2016

**Test sponsor:** H3C

**Hardware Availability:** Jun-2016

**Tested by:** H3C

**Software Availability:** Jun-2016

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
 Disk Subsystem: 1 x 600 GB SATA SSD  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<u>775</u>	<b>561</b>	775	561	776	560	32	<u>775</u>	<b>561</b>	775	561	776	560
416.gamess	32	1109	565	1106	566	<u>1108</u>	<b>565</b>	32	1076	582	<u>1077</u>	<b>582</b>	1079	581
433.milc	32	530	555	<u>530</u>	<b>554</b>	530	554	32	530	555	<u>530</u>	<b>554</b>	530	554
434.zeusmp	32	<u>401</u>	<b>726</b>	403	723	400	728	32	<u>401</u>	<b>726</b>	403	723	400	728
435.gromacs	32	326	700	<u>327</u>	<b>699</b>	328	696	32	312	732	314	727	<u>314</u>	<b>728</b>
436.cactusADM	32	469	816	470	814	<u>469</u>	<b>815</b>	32	469	816	470	814	<u>469</u>	<b>815</b>
437.leslie3d	32	789	381	<u>787</u>	<b>382</b>	785	383	32	789	381	<u>787</u>	<b>382</b>	785	383
444.namd	32	<u>568</u>	<b>452</b>	569	451	567	453	32	566	454	564	455	<u>566</u>	<b>454</b>
447.dealII	32	391	936	<u>388</u>	<b>944</b>	383	955	32	391	936	<u>388</u>	<b>944</b>	383	955
450.soplex	32	<u>677</u>	<b>394</b>	676	395	677	394	16	330	404	331	403	<u>331</u>	<b>403</b>
453.povray	32	231	738	<u>230</u>	<b>739</b>	230	742	32	198	859	195	874	<u>196</u>	<b>869</b>
454.calculix	32	<u>296</u>	<b>891</b>	296	890	296	892	32	<u>296</u>	<b>891</b>	296	890	296	892
459.GemsFDTD	32	912	372	909	374	<u>909</u>	<b>373</b>	32	912	372	909	374	<u>909</u>	<b>373</b>
465.tonto	32	<u>501</u>	<b>628</b>	501	628	502	627	32	469	672	467	674	<u>468</u>	<b>672</b>
470.lbm	32	<u>596</u>	<b>738</b>	596	738	596	738	32	<u>596</u>	<b>738</b>	596	738	596	738
481.wrf	32	531	673	539	663	<u>532</u>	<b>672</b>	32	531	673	539	663	<u>532</u>	<b>672</b>
482.sphinx3	32	1073	581	1070	583	<u>1071</u>	<b>582</b>	32	1073	581	1070	583	<u>1071</u>	<b>582</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
 Operation Mode set to Maximum Performance  
 COD set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

**SPECfp\_rate2006 = 619**

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9066

**Test date:** Jun-2016

**Test sponsor:** H3C

**Hardware Availability:** Jun-2016

**Tested by:** H3C

**Software Availability:** Jun-2016

## Platform Notes (Continued)

Early snoop set to Disabled

Sysinfo program /speccpu/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-50fi Tue Jun 28 22:33:25 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

cache size : 20480 KB

From /proc/meminfo

MemTotal: 264356836 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux linux-50fi 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jun 28 11:23

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

**SPECfp\_rate2006 = 619**

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9066

**Test date:** Jun-2016

**Test sponsor:** H3C

**Hardware Availability:** Jun-2016

**Tested by:** H3C

**Software Availability:** Jun-2016

## Platform Notes (Continued)

SPEC is set to: /speccpu

Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 201G 74G 127G 37% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.00.10 06/13/2016

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 2133 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/speccpu/libs/32:/speccpu/libs/64:/speccpu/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 619**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9066

**Test sponsor:** H3C

**Tested by:** H3C

**Test date:** Jun-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jun-2016

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

**SPECfp\_rate2006 = 619**

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate\_base2006 = 607**

CPU2006 license: 9066

Test date: Jun-2016

Test sponsor: H3C

Hardware Availability: Jun-2016

Tested by: H3C

Software Availability: Jun-2016

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes  
470.lbm: basepeak = yes  
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32  
  
447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 619**

**CPU2006 license:** 9066

**Test date:** Jun-2016

**Test sponsor:** H3C

**Hardware Availability:** Jun-2016

**Tested by:** H3C

**Software Availability:** Jun-2016

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-V1.2-BDW-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 619**

**SPECfp\_rate\_base2006 = 607**

**CPU2006 license:** 9066

**Test date:** Jun-2016

**Test sponsor:** H3C

**Hardware Availability:** Jun-2016

**Tested by:** H3C

**Software Availability:** Jun-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Aug 1 11:22:19 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 July 2016.