



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp[®]_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

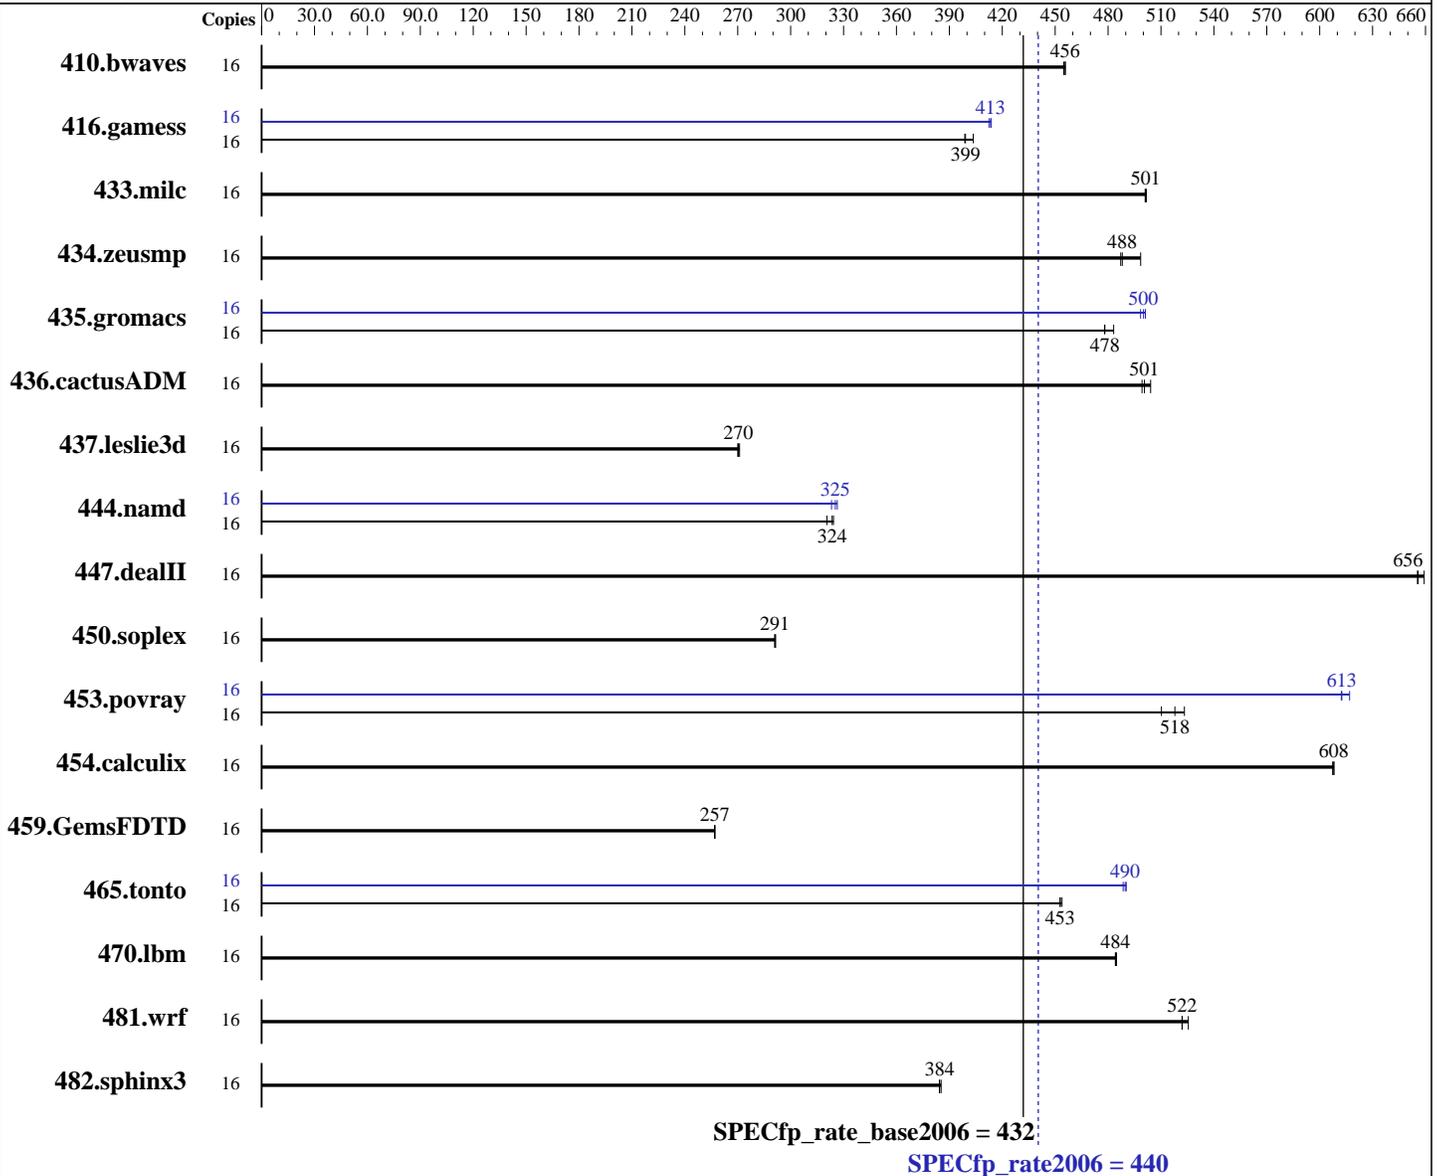

Hardware

CPU Name: Intel Xeon E5-2637 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	477	456	478	455	477	456	16	477	456	478	455	477	456
416.gamess	16	785	399	786	399	776	404	16	757	414	758	413	760	412
433.milc	16	293	501	293	501	293	502	16	293	501	293	501	293	502
434.zeusmp	16	298	488	299	487	292	498	16	298	488	299	487	292	498
435.gromacs	16	239	478	236	483	239	478	16	228	501	228	500	229	498
436.cactusADM	16	382	501	383	499	379	504	16	382	501	383	499	379	504
437.leslie3d	16	556	270	555	271	557	270	16	556	270	555	271	557	270
444.namd	16	396	324	400	321	397	324	16	397	323	393	326	394	325
447.dealII	16	278	659	279	656	279	655	16	278	659	279	656	279	655
450.soplex	16	458	291	459	291	458	291	16	458	291	459	291	458	291
453.povray	16	164	518	167	510	163	523	16	139	613	139	612	138	617
454.calculix	16	217	608	217	607	217	608	16	217	608	217	607	217	608
459.GemsFDTD	16	661	257	661	257	660	257	16	661	257	661	257	660	257
465.tonto	16	348	453	348	453	347	454	16	321	490	322	490	322	489
470.lbm	16	453	485	454	484	454	484	16	453	485	454	484	454	484
481.wrf	16	342	522	342	522	340	526	16	342	522	342	522	340	526
482.sphinx3	16	809	385	811	384	811	384	16	809	385	811	384	811	384

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes

BIOS Configuration:

```

HP Power Profile set to Custom
HP Power Regulator to HP Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C1E State
Minimum Processor Idle Power Package C-State set to No Package State
QPI Snoop Configuration set to Cluster on Die
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Intel Hyperthreading set to Enabled
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Jun 21 19:23:51 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 15360 KB

```

From /proc/meminfo

```

MemTotal:      528068684 kB
HugePages_Total:       0
Hugepagesize:       2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

uname -a:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes (Continued)

```
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 21 11:05
```

```
SPEC is set to: /cpu2006
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   460G  196G  264G  43% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP P89 02/22/2016
```

Memory:

```
8x UNKNOWN NOT AVAILABLE
```

```
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen9

(3.50 GHz, Intel Xeon E5-2637 v4)

SPECfp_rate2006 = 440

SPECfp_rate_base2006 = 432

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 26 16:12:58 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2016.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7