



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X  
(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

SPECint®\_rate2006 = 13900

SPECint\_rate\_base2006 = 13500

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

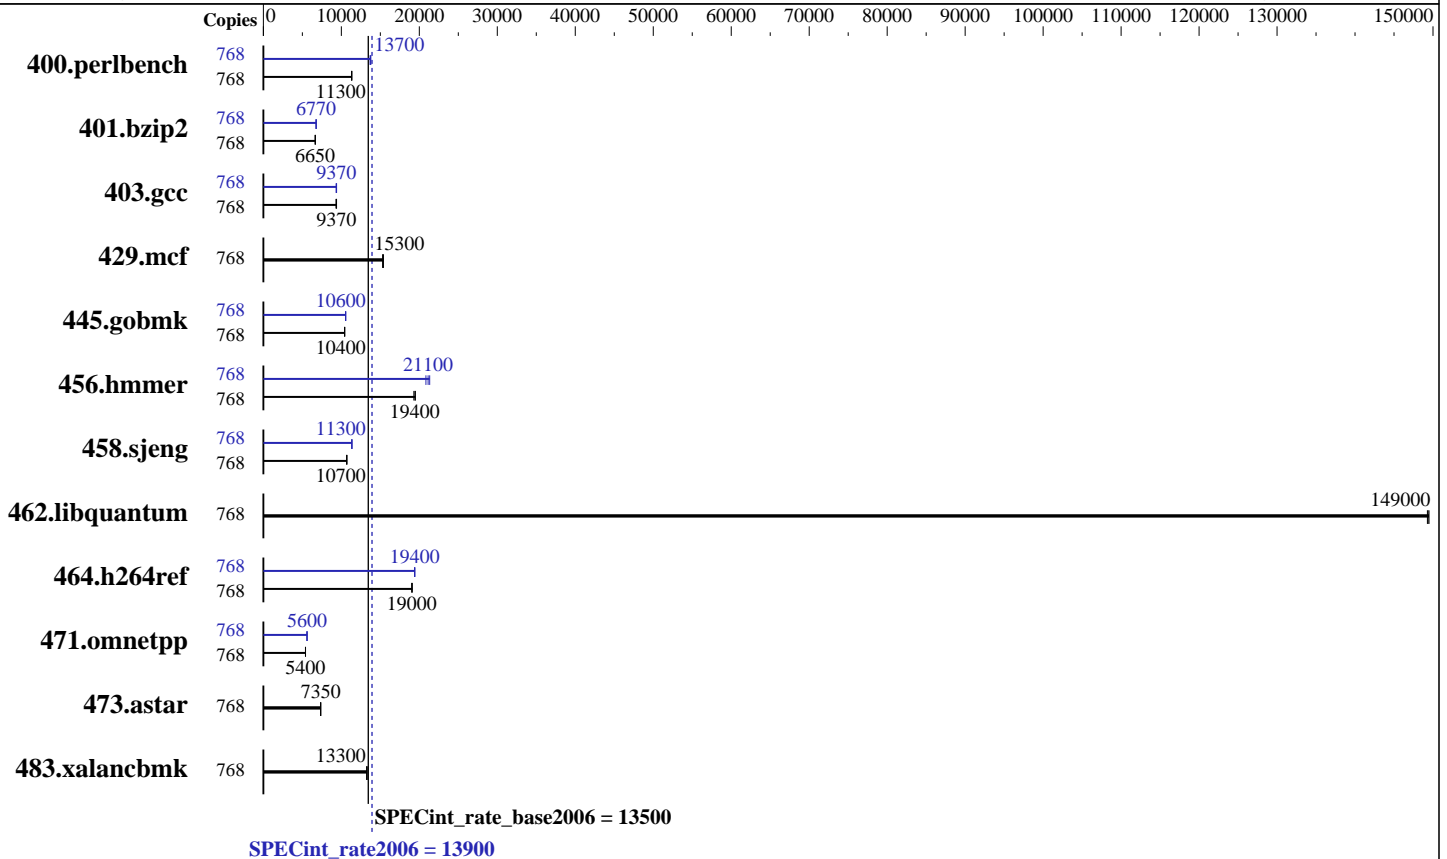

## Hardware

CPU Name: Intel Xeon E7-8890 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 384 cores, 16 chips, 24 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 to 16 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 60 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 TB (128 x 32 GB 2Rx4 PC4-2400T-L, running at 1600 MHz)  
 Disk Subsystem: 8 x C8S59A, 900 GB 10 K RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1  
 Kernel 3.12.53-60.30-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Run level 5 (multi-user, w/GUI)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

SPECint\_rate2006 = 13900

SPECint\_rate\_base2006 = 13500

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	768	<b>662</b>	<b>11300</b>	663	11300	662	11300	768	548	13700	<b>547</b>	<b>13700</b>	544	13800
401.bzip2	768	1115	6650	<b>1114</b>	<b>6650</b>	1112	6670	768	1094	6770	1096	6760	<b>1095</b>	<b>6770</b>
403.gcc	768	664	9310	<b>660</b>	<b>9370</b>	659	9380	768	<b>660</b>	<b>9370</b>	659	9390	663	9330
429.mcf	768	455	15400	<b>457</b>	<b>15300</b>	458	15300	768	455	15400	<b>457</b>	<b>15300</b>	458	15300
445.gobmk	768	773	10400	773	10400	<b>773</b>	<b>10400</b>	768	764	10500	<b>763</b>	<b>10600</b>	763	10600
456.hammer	768	<b>369</b>	<b>19400</b>	371	19300	368	19500	768	336	21300	344	20800	<b>339</b>	<b>21100</b>
458.sjeng	768	869	10700	869	10700	<b>869</b>	<b>10700</b>	768	<b>819</b>	<b>11300</b>	819	11300	819	11400
462.libquantum	768	107	149000	106	149000	<b>107</b>	<b>149000</b>	768	107	149000	106	149000	<b>107</b>	<b>149000</b>
464.h264ref	768	890	19100	<b>892</b>	<b>19000</b>	893	19000	768	875	19400	<b>875</b>	<b>19400</b>	877	19400
471.omnetpp	768	889	5400	<b>889</b>	<b>5400</b>	888	5400	768	<b>857</b>	<b>5600</b>	857	5600	858	5600
473.astar	768	<b>734</b>	<b>7350</b>	734	7340	733	7350	768	<b>734</b>	<b>7350</b>	734	7340	733	7350
483.xalancbmk	768	398	13300	400	13300	<b>400</b>	<b>13300</b>	768	398	13300	400	13300	<b>400</b>	<b>13300</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Power profile set with:
  cpupower -c all frequency-set -g performance
To control C-States, /dev/cpu_dma_latency pmqos interface is used:
  /usr/lib/tuned/pmqos-static.py cpu_dma_latency=199
Benchmark installed under /dev/shm/cpu2006 and mounted with:
  mount -o bind /dev/shm/cpu2006 /cpu2006
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
  echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
Setting the value of perf-bias:
  cpupower set -b 0
Tuned profile set with:
  tuned-adm profile throughput-performance
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**  
(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

**SPECint\_rate2006 = 13900**

**SPECint\_rate\_base2006 = 13500**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Platform Notes

### Firmware settings:

```
Memory RAS Configuration set to Maximum Performance
Sysinfo program /dev/shm/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on hawk049osl Mon Aug 1 22:38:45 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
 16 "physical id"s (chips)
 768 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 8: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 9: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 10: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 11: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 12: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 13: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 14: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 15: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 61440 KB
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**

(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

**SPECint\_rate2006 = 13900**

**SPECint\_rate\_base2006 = 13500**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

From /proc/meminfo

MemTotal: 4235891396 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux hawk049os1 3.12.53-60.30-default #1 SMP Wed Feb 10 14:41:46 UTC 2016  
(e57129f) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 5 Aug 1 22:07

SPEC is set to: /dev/shm/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	2.0T	11G	2.0T	1%	/dev/shm

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP Bundle: 008.002.106 SFW: 041.139.000 06/10/2016

Memory:

128x HP HMA84GL7MFR4N-UH 32 GB 2 rank 1067 MHz, configured at 1600 MHz

256x not defined not defined

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 4 TB and the dmidecode description should have one line reading as:

128x HP HMA84GL7MFR4N-UH 32 GB 2 rank 1067 MHz, configured at 1600 MHz



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X  
(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

SPECint\_rate2006 = 13900

SPECint\_rate\_base2006 = 13500

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/dev/shm/cpu2006/libs/32:/dev/shm/cpu2006/libs/64:/dev/shm/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarheap

## Base Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**

(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

**SPECint\_rate2006 = 13900**

**SPECint\_rate\_base2006 = 13500**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

## Base Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

SPECint\_rate2006 = 13900

SPECint\_rate\_base2006 = 13500

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-Integrity-revC.html>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Integrity Superdome X**

(384 core, 2.20 GHz, Intel Xeon E7-8890 v4)

**SPECint\_rate2006 = 13900**

**SPECint\_rate\_base2006 = 13500**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Dec-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-Integrity-revC.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 24 13:14:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 August 2016.