




SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

SPECfp_rate2006 = 1670
SPECfp_rate_base2006 = 1640

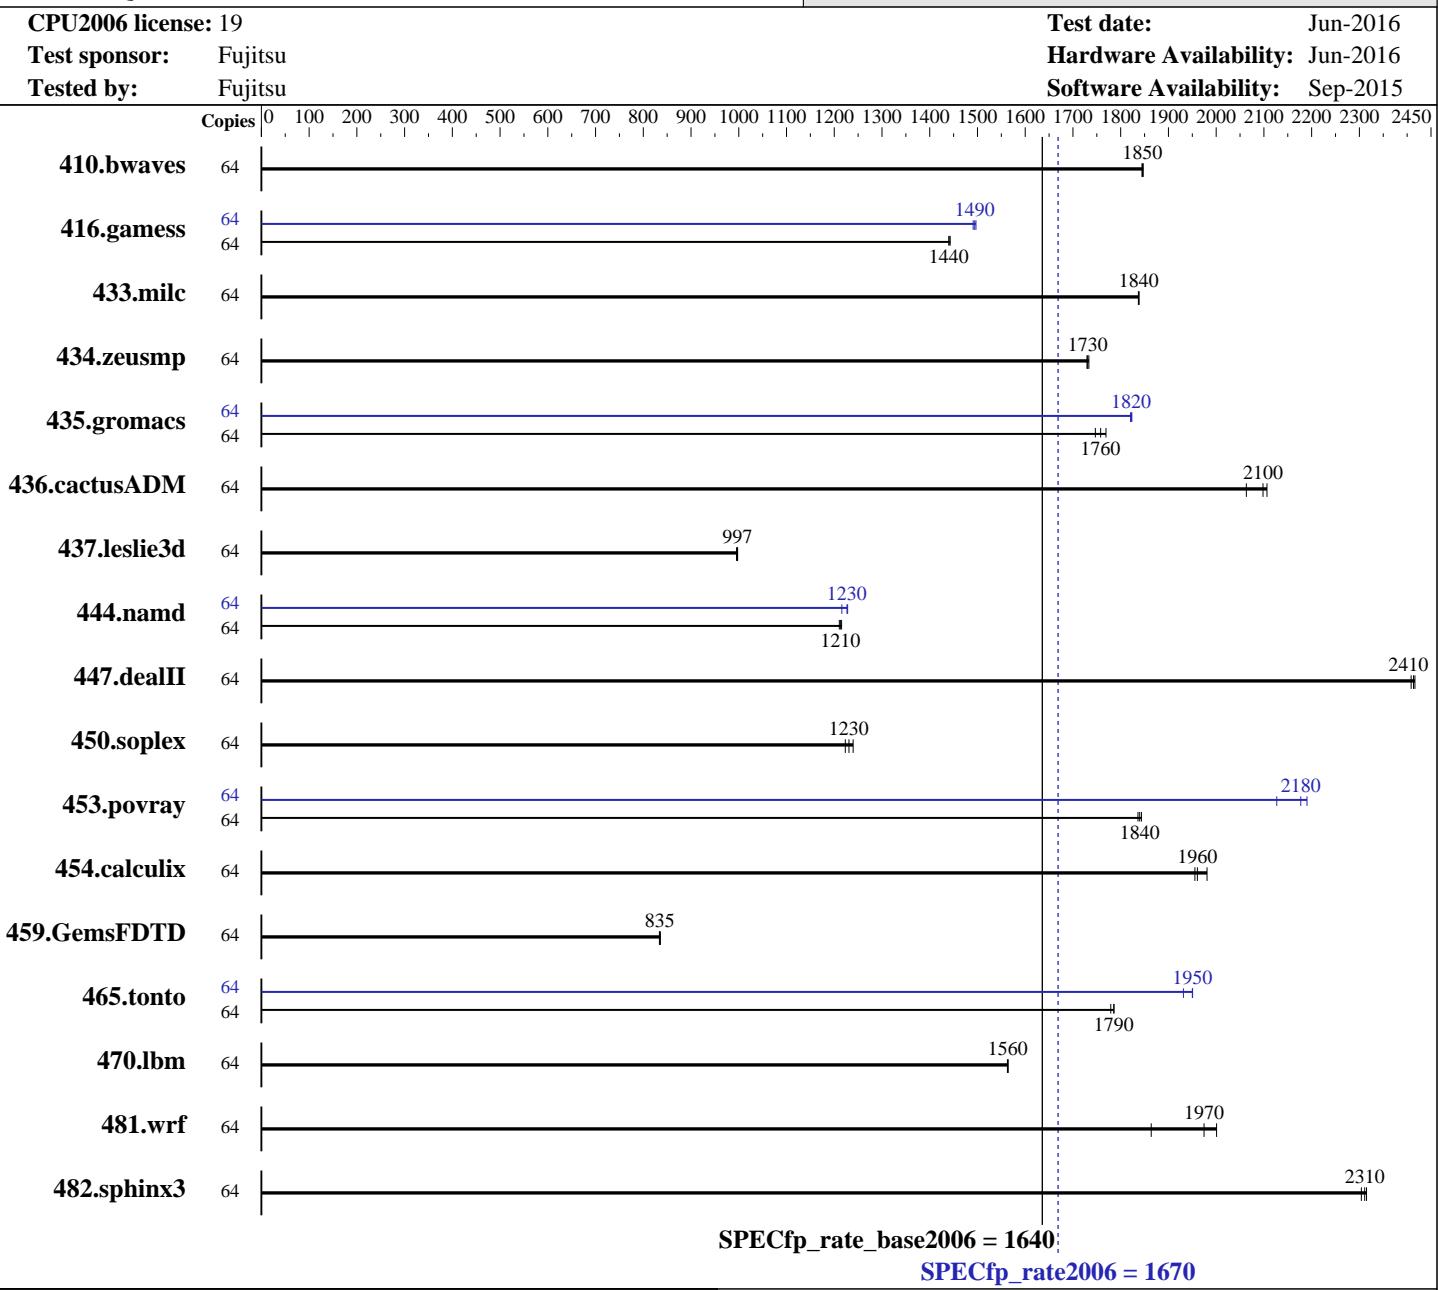

Hardware

CPU Name: Intel Xeon E7-8893 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4,6,8 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Compiler: Kernel 3.12.49-11-default
 C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 1670

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

SPECfp_rate_base2006 = 1640

CPU2006 license: 19

Test date: Jun-2016

Test sponsor: Fujitsu

Hardware Availability: Jun-2016

Tested by: Fujitsu

Software Availability: Sep-2015

L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
 Disk Subsystem: 1 x SATA, 1000 GB, 10000 RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	471	1850	472	1840	471	1850	64	471	1850	472	1840	471	1850
416.gamess	64	870	1440	870	1440	868	1440	64	839	1490	840	1490	837	1500
433.milc	64	320	1840	320	1840	320	1840	64	320	1840	320	1840	320	1840
434.zeusmp	64	336	1730	336	1730	337	1730	64	336	1730	336	1730	337	1730
435.gromacs	64	258	1770	262	1750	260	1760	64	251	1820	251	1820	251	1820
436.cactusADM	64	365	2100	363	2110	371	2060	64	365	2100	363	2110	371	2060
437.leslie3d	64	603	998	603	997	604	995	64	603	998	603	997	604	995
444.namd	64	424	1210	422	1220	423	1210	64	418	1230	418	1230	422	1220
447.dealII	64	303	2410	303	2420	304	2410	64	303	2410	303	2420	304	2410
450.soplex	64	434	1230	436	1220	431	1240	64	434	1230	436	1220	431	1240
453.povray	64	185	1840	185	1840	185	1840	64	160	2130	156	2180	155	2190
454.calculix	64	270	1960	267	1980	269	1960	64	270	1960	267	1980	269	1960
459.GemsFDTD	64	814	834	812	836	814	835	64	814	834	812	836	814	835
465.tonto	64	353	1790	354	1780	353	1790	64	323	1950	326	1930	323	1950
470.lbm	64	562	1560	562	1560	563	1560	64	562	1560	562	1560	563	1560
481.wrf	64	384	1860	362	1970	357	2000	64	384	1860	362	1970	357	2000
482.sphinx3	64	540	2310	539	2310	541	2300	64	540	2310	539	2310	541	2300

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

SPECfp_rate2006 = 1670

SPECfp_rate_base2006 = 1640

CPU2006 license: 19

Test date: Jun-2016

Test sponsor: Fujitsu

Hardware Availability: Jun-2016

Tested by: Fujitsu

Software Availability: Sep-2015

Platform Notes

BIOS configuration:

```
Energy Performance = Performance
Uncore Frequency Override = Maximum
Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-8do3 Wed Jun 15 01:47:08 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8893 v4 @ 3.20GHz
  8 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings   : 8
  physical 0: cores 12 13 25 26
  physical 1: cores 12 13 25 26
  physical 2: cores 12 13 25 26
  physical 3: cores 12 13 25 26
  physical 4: cores 12 13 25 26
  physical 5: cores 12 13 25 26
  physical 6: cores 12 13 25 26
  physical 7: cores 12 13 25 26
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      1058678360 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

SPECfp_rate2006 = 1670

SPECfp_rate_base2006 = 1640

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2015

Platform Notes (Continued)

```
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-8do3 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 14 17:23 last=5
```

```
SPEC is set to: /home/SPECcpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   982G   64G  918G   7% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU PRIMEQUEST 2000 Series BIOS Version 81.14 04/18/2016

Memory:

64x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1600 MHz
128x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

SPECfp_rate2006 = 1670

SPECfp_rate_base2006 = 1640

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2015

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

SPECfp_rate2006 = 1670

SPECfp_rate_base2006 = 1640

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2015

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 2800E3, Intel Xeon E7-8893 v4, 3.20 GHz

SPECfp_rate2006 = 1670

SPECfp_rate_base2006 = 1640

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:55:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.