



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**SGI**

(Test Sponsor: Japan Advanced Institute of Science and Technology)

**SPECfp\_rate2006 = Not Run**

**SGI UV 3000 (Intel Xeon E5-4655 v3, 2.90 GHz)**

**SPECfp\_rate\_base2006 = 51500**

**CPU2006 license:** 4


**Test sponsor:** Japan Advanced Institute of Science and Technology

**Tested by:** SGI

**Test date:** Aug-2016

**Hardware Availability:** Sep-2015

**Software Availability:** May-2016

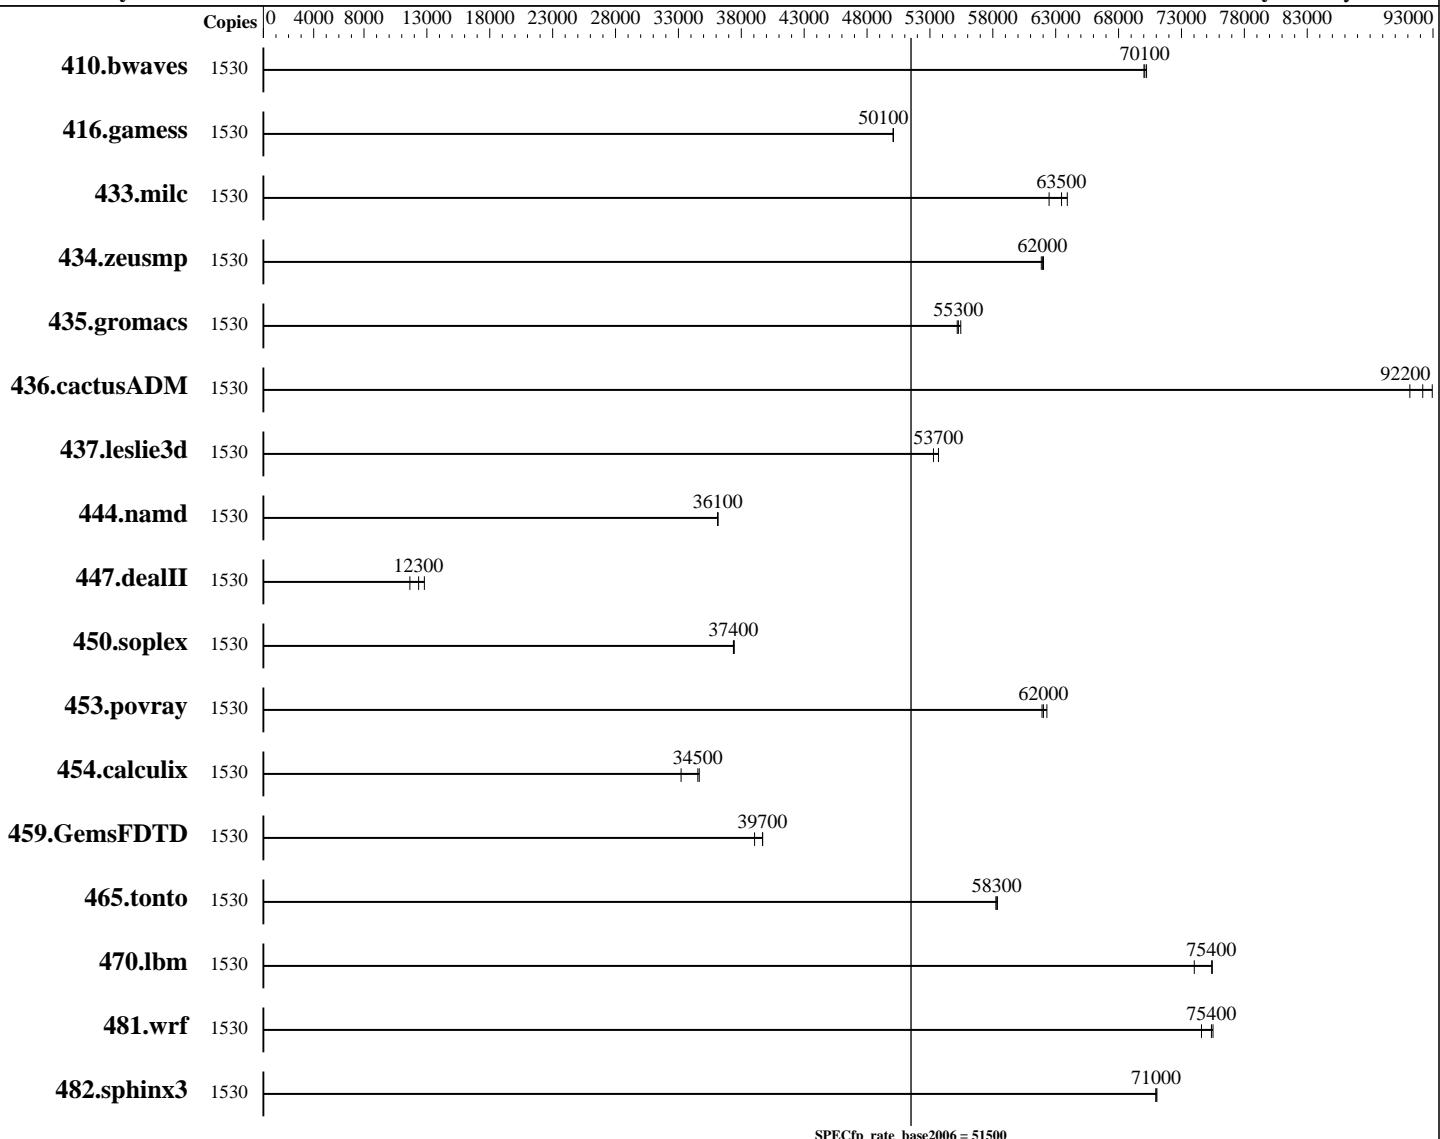

## Hardware

CPU Name: Intel Xeon E5-4655 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
CPU MHz: 2900  
FPU: Integrated  
CPU(s) enabled: 1536 cores, 256 chips, 6 cores/chip  
CPU(s) orderable: 4-256 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.48-52.27-default  
Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: tmpfs  
System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**SGI**

(Test Sponsor: Japan Advanced Institute of Science and Technology)

**SPECfp\_rate2006 = Not Run**

**SGI UV 3000 (Intel Xeon E5-4655 v3, 2.90 GHz)**

**SPECfp\_rate\_base2006 = 51500**

**CPU2006 license:** 4

**Test sponsor:** Japan Advanced Institute of Science and Technology

**Tested by:** SGI

**Test date:** Aug-2016

**Hardware Availability:** Sep-2015

**Software Availability:** May-2016

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 TB (2048 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 32640 GB tmpfs  
 Other Hardware: NUMAlink6 routers

Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	1530	<b>297</b>	<b>70100</b>	296	70200	297	70000							
416.gamess	1530	<b>598</b>	<b>50100</b>	598	50100	598	50100							
433.milc	1530	<b>221</b>	<b>63500</b>	225	62500	220	63900							
434.zeusmp	1530	225	61900	<b>225</b>	<b>62000</b>	224	62000							
435.gromacs	1530	<b>198</b>	<b>55300</b>	197	55500	198	55200							
436.cactusADM	1530	<b>198</b>	<b>92200</b>	197	92900	201	91200							
437.leslie3d	1530	268	53700	<b>268</b>	<b>53700</b>	270	53300							
444.namd	1530	<b>340</b>	<b>36100</b>	340	36100	340	36100							
447.dealII	1530	1367	12800	<b>1418</b>	<b>12300</b>	1503	11600							
450.soplex	1530	341	37400	341	37400	<b>341</b>	<b>37400</b>							
453.povray	1530	<b>131</b>	<b>62000</b>	131	62300	131	61900							
454.calculix	1530	<b>365</b>	<b>34500</b>	364	34700	380	33200							
459.GemsFDTD	1530	416	39100	<b>409</b>	<b>39700</b>	409	39700							
465.tonto	1530	<b>258</b>	<b>58300</b>	258	58200	258	58400							
470.lbm	1530	284	74000	<b>279</b>	<b>75400</b>	279	75500							
481.wrf	1530	226	75500	<b>227</b>	<b>75400</b>	229	74600							
482.sphinx3	1530	420	71000	420	71000	<b>420</b>	<b>71000</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The dplace mechanism was used to bind copies to processors. The config file option 'submit' was used to generate dplace commands to bind each copy to a specific processor. Benchmark copies were launched in a staggered fashion to minimize kernel contention associated with synchronized launches. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

The tmpfs filesystem was set up with:

```
mkdir -p /mnt/shm/cpu2006-sgi-ic16
mount -t tmpfs -o rw,size=32640g,mpol=bind:1-255 tmpfs /mnt/shm/cpu2006-sgi-ic16
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

(Test Sponsor: Japan Advanced Institute of Science and Technology)

SGI UV 3000 (Intel Xeon E5-4655 v3, 2.90 GHz)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 51500**

CPU2006 license: 4

Test sponsor: Japan Advanced Institute of Science and Technology

Tested by: SGI

Test date: Aug-2016

Hardware Availability: Sep-2015

Software Availability: May-2016

## Platform Notes

Intel Hyperthreading set to Disabled

The dmidecode output is in error - There were 2048 memory DIMMs running at 2133.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/mnt/shm/cpu2006-sgi-ic16/libs/32:/mnt/shm/cpu2006-sgi-ic16/libs/64:/mnt/shm/cpu2006-sgi-ic16/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

(Test Sponsor: Japan Advanced Institute of Science and Technology)

SGI UV 3000 (Intel Xeon E5-4655 v3, 2.90 GHz)

**SPECfp\_rate2006 = Not Run**

CPU2006 license: 4

Test sponsor: Japan Advanced Institute of Science and Technology

Tested by: SGI

Test date: Aug-2016

Hardware Availability: Sep-2015

Software Availability: May-2016

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/SGI-UV3000-Platform-Flags.20160906.html>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/SGI-UV3000-Platform-Flags.20160906.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:56:29 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.