



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL560 Gen9  
(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp®2006 = 118**

**SPECfp\_base2006 = 112**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jul-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

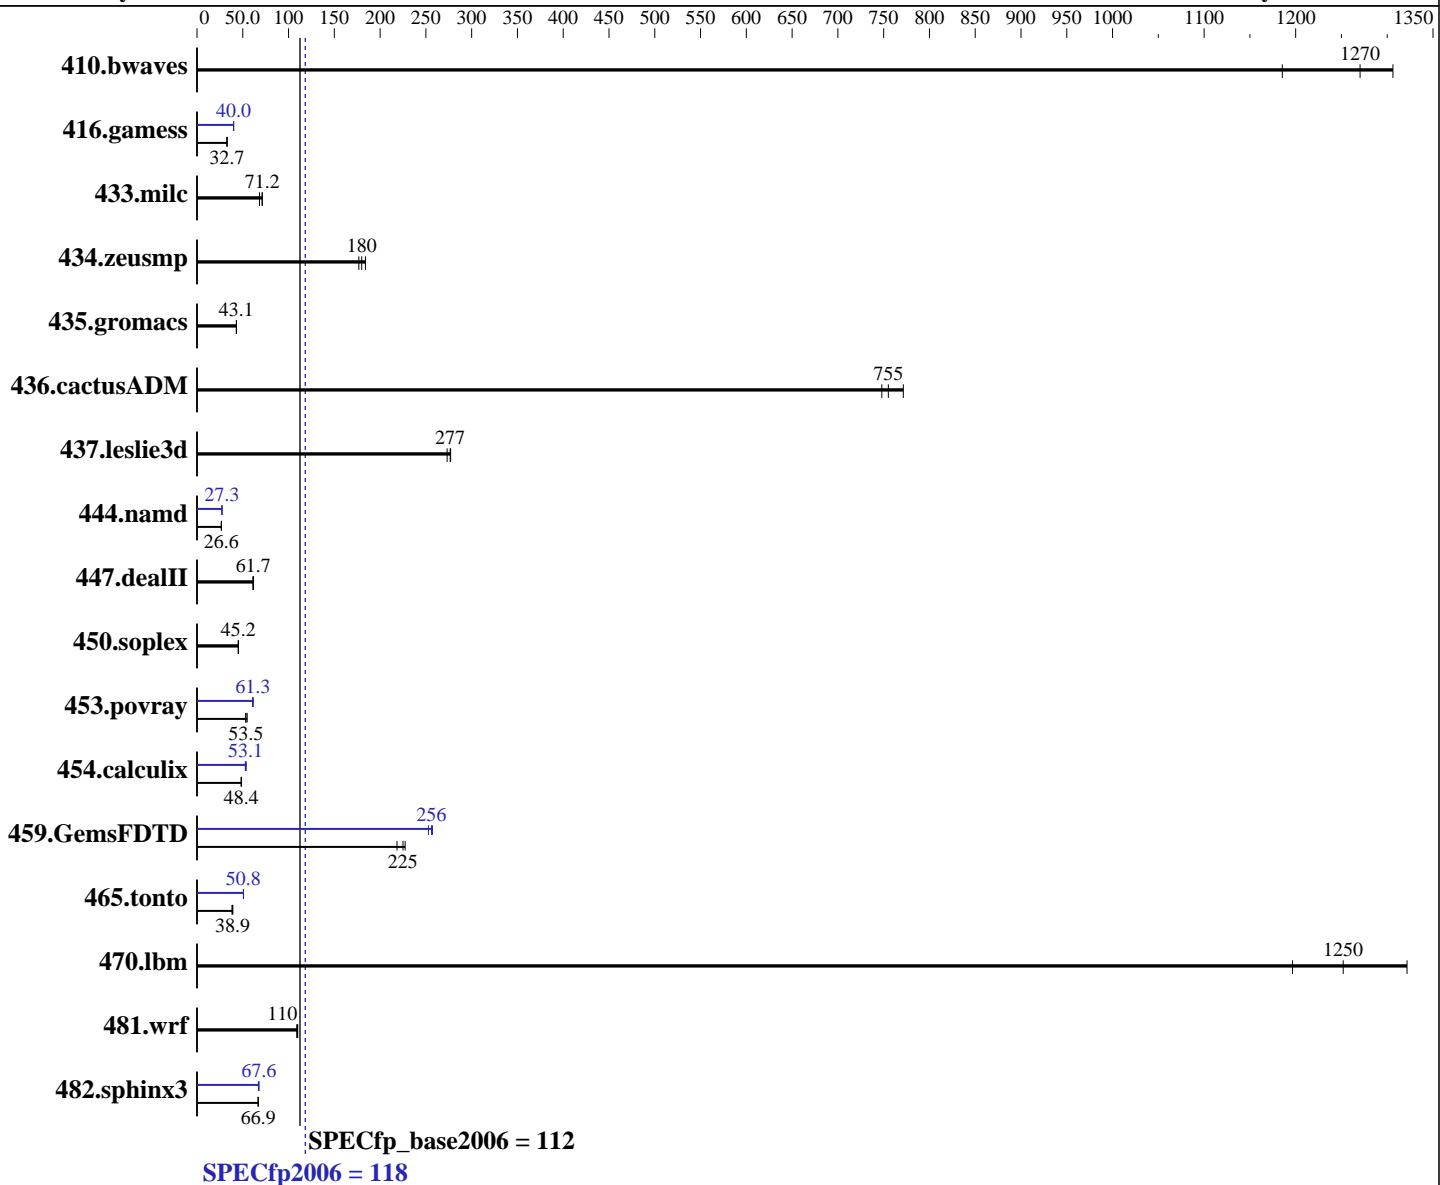

## Hardware

CPU Name: Intel Xeon E5-4660 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.49-11-default  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL560 Gen9  
(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp2006 = 118**

**SPECfp\_base2006 = 112**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	10.4	1310	11.5	1190	<b>10.7</b>	<b>1270</b>	10.4	1310	11.5	1190	<b>10.7</b>	<b>1270</b>
416.gamess	<b>598</b>	<b>32.7</b>	595	32.9	598	32.7	<b>490</b>	40.0	489	40.0	<b>490</b>	<b>40.0</b>
433.milc	<b>129</b>	<b>71.2</b>	129	71.3	134	68.3	<b>129</b>	<b>71.2</b>	129	71.3	134	68.3
434.zeusmp	49.5	184	<b>50.6</b>	<b>180</b>	51.5	177	<b>49.5</b>	184	<b>50.6</b>	<b>180</b>	51.5	177
435.gromacs	166	43.0	<b>166</b>	<b>43.1</b>	166	43.1	166	43.0	<b>166</b>	<b>43.1</b>	166	43.1
436.cactusADM	<b>15.8</b>	<b>755</b>	16.0	748	15.5	771	<b>15.8</b>	<b>755</b>	16.0	748	15.5	771
437.leslie3d	33.9	277	34.4	273	<b>34.0</b>	<b>277</b>	33.9	277	34.4	273	<b>34.0</b>	<b>277</b>
444.namd	301	26.6	<b>301</b>	<b>26.6</b>	301	26.6	<b>294</b>	<b>27.3</b>	294	27.3	294	27.3
447.dealII	185	61.8	<b>186</b>	<b>61.7</b>	188	61.0	<b>185</b>	61.8	<b>186</b>	<b>61.7</b>	188	61.0
450.soplex	184	45.2	185	45.1	<b>185</b>	<b>45.2</b>	184	45.2	185	45.1	<b>185</b>	<b>45.2</b>
453.povray	97.0	54.8	100	53.1	<b>99.5</b>	<b>53.5</b>	87.6	60.8	<b>86.9</b>	<b>61.3</b>	86.8	61.3
454.calculix	<b>170</b>	<b>48.4</b>	171	48.3	170	48.4	156	52.7	153	53.8	<b>156</b>	<b>53.1</b>
459.GemsFDTD	48.6	218	<b>47.2</b>	<b>225</b>	46.7	227	41.3	257	<b>41.4</b>	<b>256</b>	42.0	253
465.tonto	252	39.0	258	38.2	<b>253</b>	<b>38.9</b>	<b>194</b>	<b>50.8</b>	194	50.8	194	50.7
470.lbm	11.5	1200	<b>11.0</b>	<b>1250</b>	10.4	1320	11.5	1200	<b>11.0</b>	<b>1250</b>	10.4	1320
481.wrf	<b>102</b>	<b>110</b>	102	110	103	109	<b>102</b>	<b>110</b>	102	110	103	109
482.sphinx3	290	67.1	<b>291</b>	<b>66.9</b>	292	66.7	<b>290</b>	<b>67.1</b>	288	<b>67.7</b>	<b>288</b>	<b>67.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C1E State

Minimum Processor Idle Power Package C-State set to No Package State

QPI Snoop Configuration set to Home Snoop

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp2006 =**

**118**

**SPECfp\_base2006 =**

**112**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jul-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Intel Hyper Threading set to Disabled
Sysinfo program /home/custom_binaries/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1
running on sles12biswadl560 Thu Jul 28 06:52:13 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4660 v4 @ 2.20GHz
        4 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 16
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 40960 KB
```

```
From /proc/meminfo
MemTotal:      529309212 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux sles12biswadl560 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp2006 =**

**118**

**SPECfp\_base2006 =**

**112**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Jul-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

run-level 3 Jul 28 06:46

```
SPEC is set to: /home/custom_binaries/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G  109G  222G  33% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P85 07/01/2016

Memory:

```
16x UNKNOWN NOT AVAILABLE
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

OMP\_NUM\_THREADS = "64"

LD\_LIBRARY\_PATH = "/home/custom\_binaries/cpu2006/lib32:/home/custom\_binaries/cpu2006/lib64:/home/custom\_binaries/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2260 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp2006 =**

**118**

**SPECfp\_base2006 =**

**112**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Jul-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint -auto-ilp32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
-qopt-calloc
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-fp-model fast=2
-qopt-prefetch-issue-excl-hint
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint -auto-ilp32
-fp-model fast=2
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp2006 =**

**118**

**SPECfp\_base2006 =**

**112**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Jul-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel  
-opt-prefetch -ansi-alias  
-fp-model fast=2  
-qopt-prefetch-issue-excl-hint -funroll-all-loops

-nofor-main

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.20 GHz, Intel Xeon E5-4660 v4)

**SPECfp2006 =**

**118**

**SPECfp\_base2006 =**

**112**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Jul-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 6 16:57:21 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 September 2016.