



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-8855 v4)

SPECfp_rate_base2006 = 1170

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

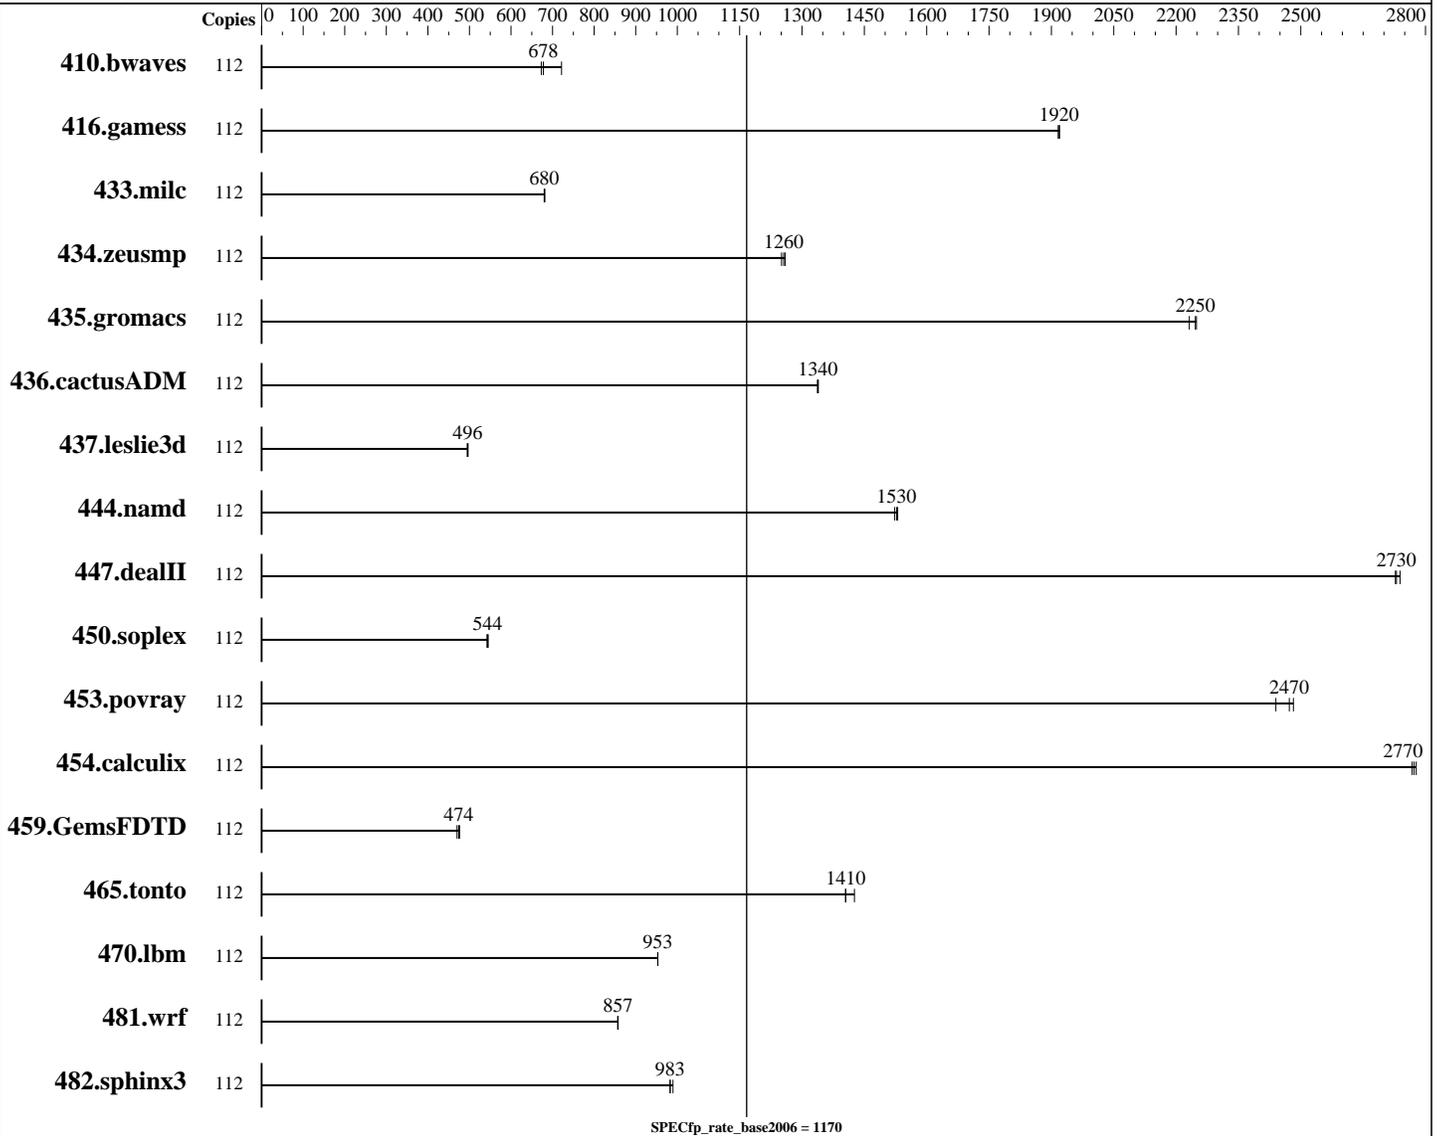

Hardware

CPU Name: Intel Xeon E7-8855 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-8855 v4)

SPECfp_rate_base2006 = 1170

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	2109	722	2262	673	2246	678							
416.gamess	112	1142	1920	1143	1920	1144	1920							
433.milc	112	1509	681	1512	680	1512	680							
434.zeusmp	112	815	1250	812	1260	809	1260							
435.gromacs	112	356	2250	358	2230	356	2250							
436.cactusADM	112	1000	1340	999	1340	1001	1340							
437.leslie3d	112	2129	495	2121	496	2122	496							
444.namd	112	587	1530	588	1530	590	1520							
447.dealII	112	469	2730	470	2730	468	2740							
450.soplex	112	1723	542	1714	545	1717	544							
453.povray	112	244	2440	241	2470	240	2480							
454.calculix	112	333	2770	333	2780	334	2770							
459.GemsFDTD	112	2495	476	2527	470	2506	474							
465.tonto	112	784	1410	773	1430	785	1400							
470.lbm	112	1615	953	1614	953	1615	953							
481.wrf	112	1460	857	1459	858	1460	857							
482.sphinx3	112	2206	990	2221	983	2221	983							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
cpupower -c all frequency-set -g performance



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-8855 v4)

SPECfp_rate_base2006 = 1170

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set C-State to C0/C1

Sysinfo program /home/spec2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on RH5885v3 Sat Aug 13 02:38:43 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8855 v4 @ 2.10GHz

4 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

cache size : 35840 KB

From /proc/meminfo

MemTotal: 263847572 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.2 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.2"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:

Linux RH5885v3 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 12 19:10

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-8855 v4)

SPECfp_rate_base2006 = 1170

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Aug-2016
Hardware Availability: Jun-2016
Software Availability: Oct-2015

Platform Notes (Continued)

SPEC is set to: /home/spec2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	838G	56G	783G	7%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV767 07/27/2016

Memory:

16x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz
32x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have two lines reading as:

16x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333 MHz
32x NO DIMM NO DIMM

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/spec2006/libs/32:/home/spec2006/libs/64:/home/spec2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-8855 v4)

SPECfp_rate_base2006 = 1170

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Aug-2016
Hardware Availability: Jun-2016
Software Availability: Oct-2015

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

Huawei RH5885 V3 (Intel Xeon E7-8855 v4)

SPECfp_rate_base2006 = 1170

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2016

Hardware Availability: Jun-2016

Software Availability: Oct-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 6 16:57:22 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 September 2016.