



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97


Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

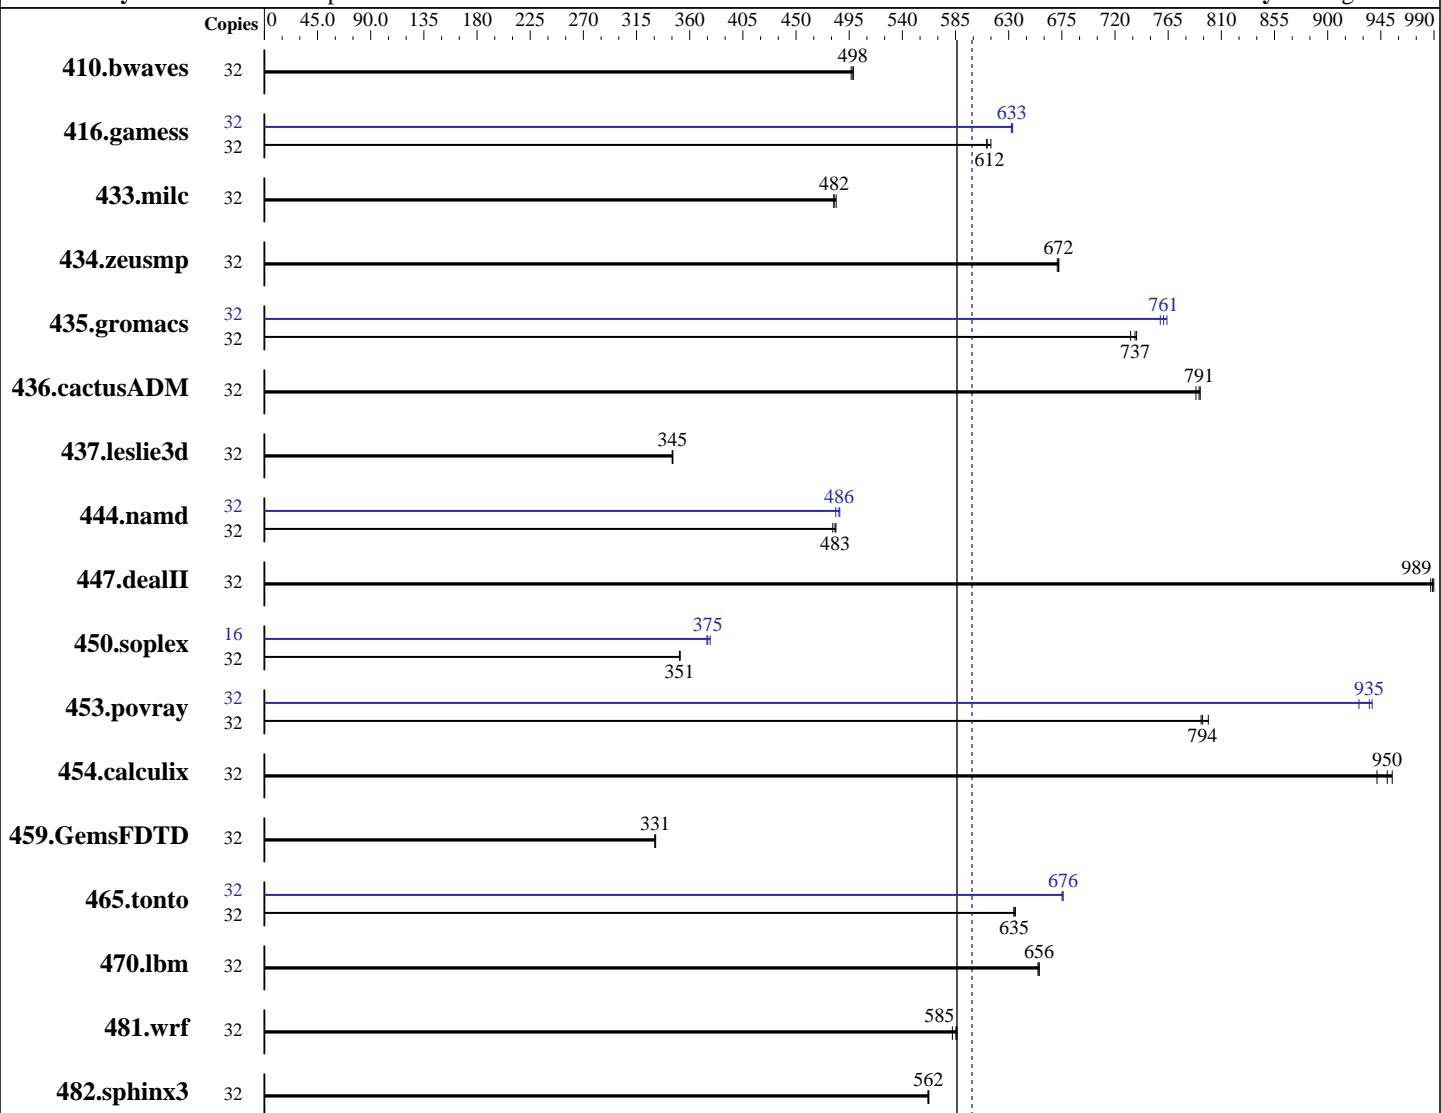

SPECfp_rate_base2006 = 586

SPECfp_rate2006 = 599

Hardware

CPU Name: Intel Xeon E5-2640 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 Compiler: 3.10.0-123.el7.x86_64
 C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R , running at 1866 MHz)
 Disk Subsystem: 1 x 1000 GB SATA , 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	872	498	<u>873</u>	<u>498</u>	876	497	32	872	498	<u>873</u>	<u>498</u>	876	497		
416.gamess	32	1019	615	<u>1024</u>	<u>612</u>	1025	611	32	989	633	<u>990</u>	<u>633</u>	991	632		
433.milc	32	609	482	<u>609</u>	<u>482</u>	607	484	32	609	482	<u>609</u>	<u>482</u>	607	484		
434.zeusmp	32	<u>433</u>	<u>672</u>	433	672	434	671	32	<u>433</u>	<u>672</u>	433	672	434	671		
435.gromacs	32	<u>310</u>	<u>737</u>	309	738	312	733	32	301	758	<u>300</u>	<u>761</u>	299	764		
436.cactusADM	32	483	792	<u>483</u>	<u>791</u>	485	789	32	483	792	<u>483</u>	<u>791</u>	485	789		
437.leslie3d	32	870	346	<u>871</u>	<u>345</u>	871	345	32	870	346	<u>871</u>	<u>345</u>	871	345		
444.namd	32	<u>531</u>	<u>483</u>	530	484	533	481	32	531	484	<u>528</u>	<u>486</u>	527	487		
447.dealII	32	371	987	370	990	<u>370</u>	<u>989</u>	32	371	987	370	990	<u>370</u>	<u>989</u>		
450.soplex	32	758	352	<u>759</u>	<u>351</u>	760	351	16	354	377	356	375	<u>356</u>	<u>375</u>		
453.povray	32	<u>214</u>	<u>794</u>	215	793	213	799	32	182	938	184	927	<u>182</u>	<u>935</u>		
454.calculix	32	277	955	280	942	<u>278</u>	<u>950</u>	32	277	955	280	942	<u>278</u>	<u>950</u>		
459.GemsFDTD	32	<u>1027</u>	<u>331</u>	1027	331	1025	331	32	<u>1027</u>	<u>331</u>	1027	331	1025	331		
465.tonto	32	<u>496</u>	<u>635</u>	495	636	496	634	32	<u>466</u>	<u>676</u>	466	676	466	675		
470.lbm	32	670	656	<u>671</u>	<u>656</u>	672	655	32	670	656	<u>671</u>	<u>656</u>	672	655		
481.wrf	32	<u>611</u>	<u>585</u>	610	586	614	582	32	<u>611</u>	<u>585</u>	610	586	614	582		
482.sphinx3	32	1109	562	<u>1110</u>	<u>562</u>	1110	562	32	1109	562	<u>1110</u>	<u>562</u>	1110	562		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on localhost.localdomain Tue May 24 11:45:30 2016
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      131747784 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 May 24 11:44

```
SPEC is set to: /usr/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   831G  374G  458G  45% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

Platform Notes (Continued)

BIOS Intel Corporation SE5C610.86B.01.01.0015.012820160943 01/28/2016

Memory:

16x NO DIMM NO DIMM

8x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz, configured at 1866 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

Base Portability Flags (Continued)

```
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 599

Altos R380 F3 (Intel Xeon E5-2640 v3)

SPECfp_rate_base2006 = 586

CPU2006 license: 97

Test date: May-2016

Test sponsor: Acer Incorporated

Hardware Availability: May-2015

Tested by: Acer Incorporated

Software Availability: Aug-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 12 16:33:29 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2016.