



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp<sub>®</sub>\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Aug-2016

Software Availability: Dec-2015

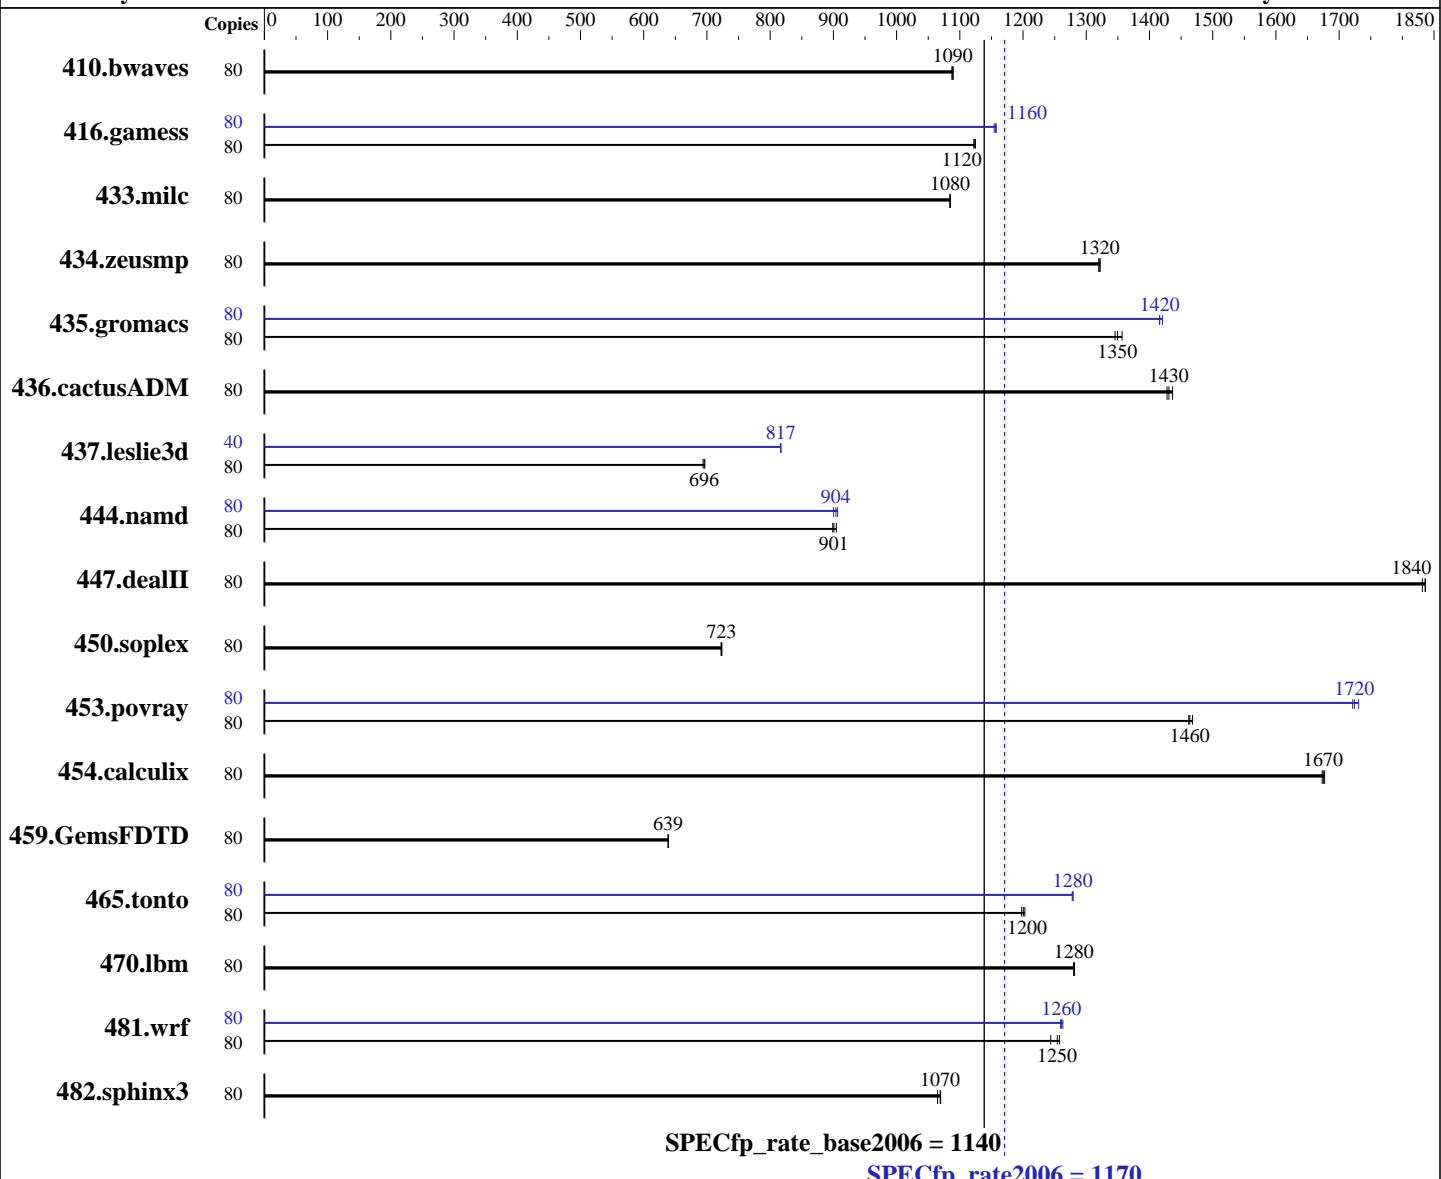

**SPECfp\_rate\_base2006 = 1140**

**SPECfp\_rate2006 = 1170**

## Hardware

CPU Name: Intel Xeon E7-4820 v4  
CPU Characteristics:  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.49-11-default  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R,  
running at 1333 MHz)  
Disk Subsystem: 1 x 800 GB NVMe PCIe SSD, RAID 0  
Other Hardware: DL580 Gen9 NVMe SSD Express Bay Enablement Kit

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1000	1090	<b>999</b>	<b>1090</b>	998	1090	80	1000	1090	<b>999</b>	<b>1090</b>	998	1090
416.gamess	80	1396	1120	<b>1395</b>	<b>1120</b>	1393	1120	80	1353	1160	<b>1355</b>	<b>1160</b>	1357	1150
433.milc	80	677	1080	<b>677</b>	<b>1080</b>	677	1080	80	677	1080	<b>677</b>	<b>1080</b>	677	1080
434.zeusmp	80	551	1320	552	1320	<b>551</b>	<b>1320</b>	80	551	1320	552	1320	<b>551</b>	<b>1320</b>
435.gromacs	80	<b>423</b>	<b>1350</b>	421	1360	425	1350	80	<b>403</b>	<b>1420</b>	403	1420	402	1420
436.cactusADM	80	670	1430	665	1440	<b>668</b>	<b>1430</b>	80	670	1430	665	1440	<b>668</b>	<b>1430</b>
437.leslie3d	80	<b>1081</b>	<b>696</b>	1084	694	1079	697	40	460	817	460	817	<b>460</b>	<b>817</b>
444.namd	80	709	905	<b>712</b>	<b>901</b>	714	899	80	708	907	713	900	<b>710</b>	<b>904</b>
447.dealII	80	<b>498</b>	<b>1840</b>	498	1840	500	1830	80	<b>498</b>	<b>1840</b>	498	1840	500	1830
450.soplex	80	922	724	<b>923</b>	<b>723</b>	924	722	80	922	724	<b>923</b>	<b>723</b>	924	722
453.povray	80	290	1470	291	1460	<b>291</b>	<b>1460</b>	80	247	1720	246	1730	<b>247</b>	<b>1720</b>
454.calculix	80	394	1670	394	1680	<b>394</b>	<b>1670</b>	80	394	1670	394	1680	<b>394</b>	<b>1670</b>
459.GemsFDTD	80	1329	638	1328	639	<b>1329</b>	<b>639</b>	80	1329	638	1328	639	<b>1329</b>	<b>639</b>
465.tonto	80	657	1200	<b>656</b>	<b>1200</b>	654	1200	80	616	1280	615	1280	<b>616</b>	<b>1280</b>
470.lbm	80	859	1280	<b>859</b>	<b>1280</b>	858	1280	80	859	1280	<b>859</b>	<b>1280</b>	858	1280
481.wrf	80	<b>712</b>	<b>1250</b>	718	1240	711	1260	80	<b>710</b>	<b>1260</b>	<b>709</b>	<b>1260</b>	708	1260
482.sphinx3	80	1458	1070	<b>1459</b>	<b>1070</b>	1464	1060	80	1458	1070	<b>1459</b>	<b>1070</b>	1464	1060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Platform Notes

### BIOS Configuration:

HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
QPI Snoop Configuration set to Home Snoop  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /home/hp\_binary/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-vi0i Sat Sep 24 22:13:33 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4820 v4 @ 2.00GHz  
 4 "physical id"s (chips)  
 80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 10  
 siblings : 20  
 physical 0: cores 0 1 2 3 4 8 9 10 11 12  
 physical 1: cores 0 1 2 3 4 8 9 10 11 12  
 physical 2: cores 0 1 2 3 4 8 9 10 11 12  
 physical 3: cores 0 1 2 3 4 8 9 10 11 12  
cache size : 25600 KB

From /proc/meminfo  
MemTotal: 529316632 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
 SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 1  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
 NAME="SLES"  
VERSION="12-SP1"  
VERSION\_ID="12.1"  
PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"  
ID="sles"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

```
Linux linux-vi0i 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 23 10:31

SPEC is set to: /home/hp\_binary/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfs	703G	103G	600G	15%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 08/06/2016

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1333 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1333 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/hp\_binary/cpu2006/libs/32:/home/hp\_binary/cpu2006/libs/64:/home/hp\_binary/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-fp-model fast=2 -auto-ilp32 -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
             -unroll12 -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

```
437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
               -opt-malloc-options=3 -opt-prefetch
```

459.GemsFDTD: basepeak = yes

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
            -unroll14 -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -static(pass 2)
              -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.00 GHz, Intel Xeon E7-4820 v4)

**SPECfp\_rate2006 = 1170**

**SPECfp\_rate\_base2006 = 1140**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 19 10:29:14 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 October 2016.