



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp®_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017


Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

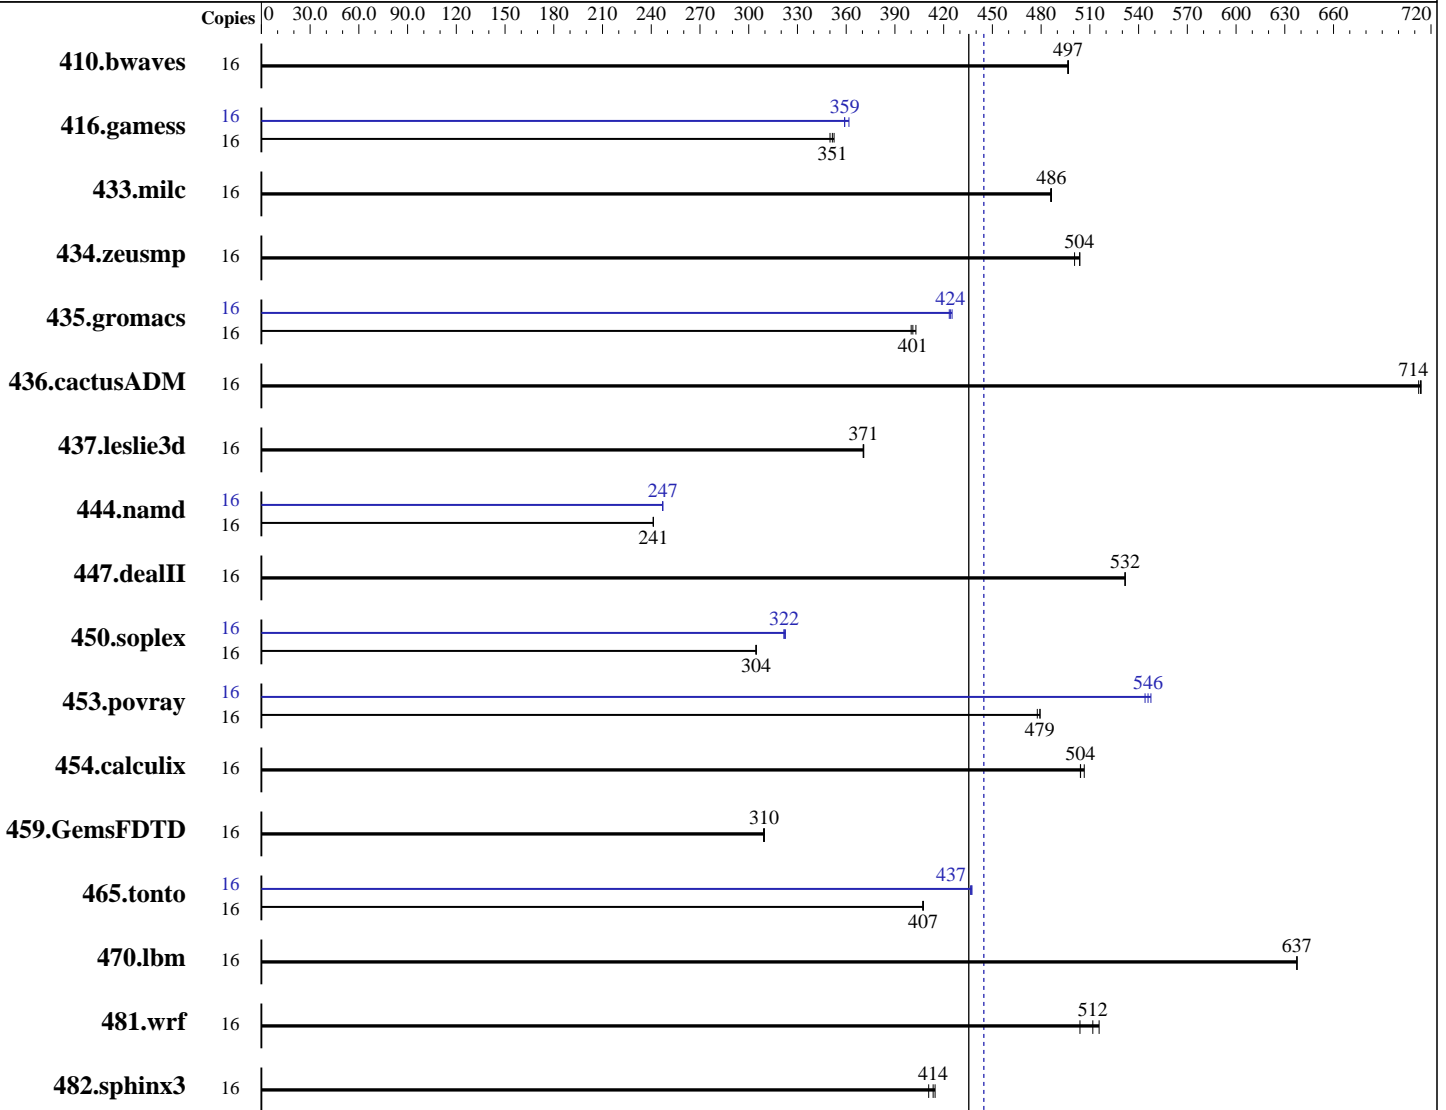

SPECfp_rate_base2006 = 435

SPECfp_rate2006 = 445

Hardware

CPU Name: Intel Xeon E5-2609 v4
 CPU Characteristics:
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	438	497	438	496	438	497	16	438	497	438	496	438	497		
416.gamess	16	895	350	889	353	891	351	16	872	359	873	359	866	362		
433.milc	16	302	486	302	486	302	486	16	302	486	302	486	302	486		
434.zeusmp	16	289	504	291	501	289	504	16	289	504	291	501	289	504		
435.gromacs	16	285	401	284	403	286	400	16	269	424	270	423	269	425		
436.cactusADM	16	268	714	268	714	268	712	16	268	714	268	714	268	712		
437.leslie3d	16	406	371	406	370	406	371	16	406	371	406	370	406	371		
444.namd	16	532	241	532	241	532	241	16	519	247	519	247	519	247		
447.dealII	16	344	532	344	532	344	532	16	344	532	344	532	344	532		
450.soplex	16	438	304	438	305	438	304	16	415	322	415	322	414	323		
453.povray	16	178	479	178	479	178	478	16	156	544	156	546	155	548		
454.calculix	16	261	507	262	504	262	504	16	261	507	262	504	262	504		
459.GemsFDTD	16	548	310	549	309	548	310	16	548	310	549	309	548	310		
465.tonto	16	387	407	387	407	386	408	16	360	437	360	437	361	437		
470.lbm	16	345	637	345	637	345	638	16	345	637	345	637	345	638		
481.wrf	16	349	512	347	516	355	504	16	349	512	347	516	355	504		
482.sphinx3	16	759	411	754	414	752	415	16	759	411	754	414	752	415		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes

BIOS Configuration:

```

Cluster On Die set to Disabled
Early Snoop set to Disabled
Performance Profile set to Custom
ClE Support set to Disabled
Core C3 set to Disabled
Core C6 set to Disabled
Thermal Profile set to Max Performance
Memory Power Savings set to Disabled
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on TD350-01 Wed Oct 12 23:38:05 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E5-2609 v4 @ 1.70GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

From /proc/meminfo

```

MemTotal:      264560016 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
 VERSION = 12
 PATCHLEVEL = 1
 # This file is deprecated and will be removed in a future service pack or
 release.
 # Please check /etc/os-release for details about this release.

os-release:
 NAME="SLES"
 VERSION="12-SP1"
 VERSION_ID="12.1"
 PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
 ID="sles"
 ANSI_COLOR="0;32"
 CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes (Continued)

```
uname -a:
Linux TD350-01 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 12 14:07
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   689G  107G  582G  16% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO TB5TS362 03/24/2016

Memory:

16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 1866 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 445

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test date: Oct-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TD350
(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp_rate2006 = 445

SPECfp_rate_base2006 = 435

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 2 10:38:49 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 November 2016.