



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

Synergy 480 Gen9  
(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

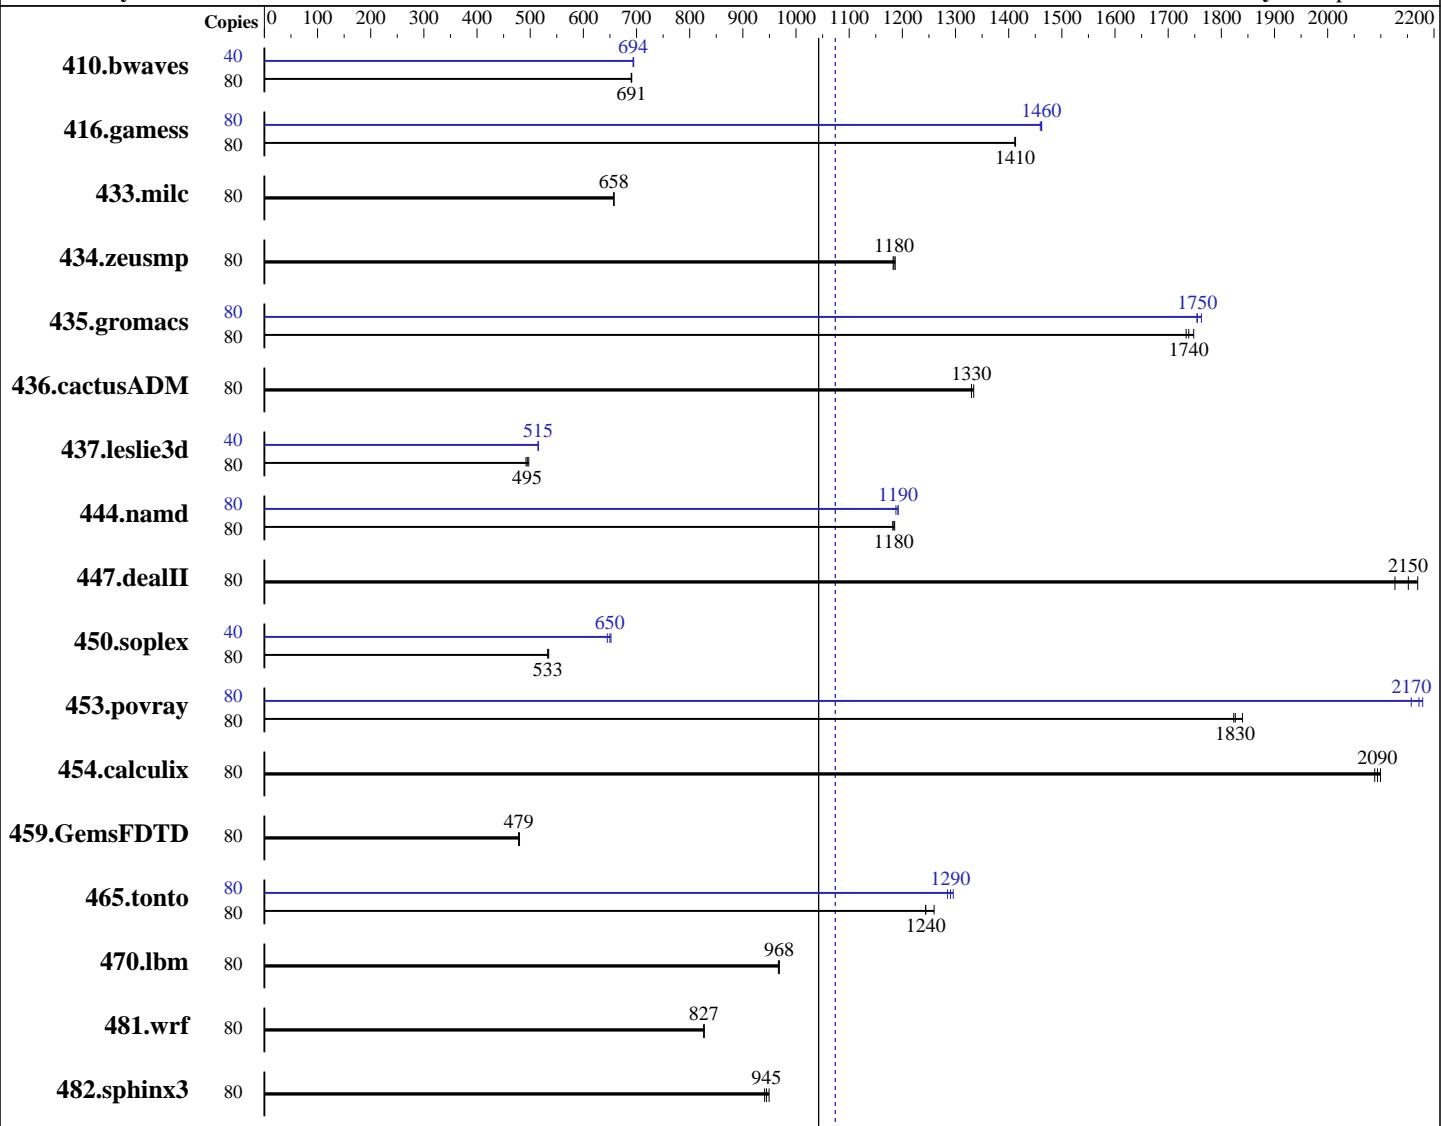

**SPECfp\_rate\_base2006 = 1040**

**SPECfp\_rate2006 = 1070**

## Hardware

CPU Name: Intel Xeon E5-2698 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1  
Kernel 3.12.49-11-default  
Compiler: C/C++: Version 17.0.0.098 of Intel C++ Studio XE for Linux;  
Fortran: Version 17.0.0.098 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

Synergy 480 Gen9  
(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

L3 Cache: 50 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 600 GB 10 K SAS, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1576	690	1574	691	<b>1574</b>	<b>691</b>	40	782	695	784	694	<b>784</b>	<b>694</b>
416.gamess	80	<b>1109</b>	<b>1410</b>	1110	1410	1109	1410	80	<b>1072</b>	<b>1460</b>	1071	1460	1073	1460
433.milc	80	1117	658	<b>1117</b>	<b>658</b>	1118	657	80	1117	658	<b>1117</b>	<b>658</b>	1118	657
434.zeusmp	80	<b>615</b>	<b>1180</b>	614	1190	616	1180	80	<b>615</b>	<b>1180</b>	614	1190	616	1180
435.gromacs	80	<b>329</b>	<b>1740</b>	327	1750	329	1730	80	324	1760	<b>325</b>	<b>1750</b>	326	1750
436.cactusADM	80	<b>719</b>	<b>1330</b>	717	1330	719	1330	80	<b>719</b>	<b>1330</b>	717	1330	719	1330
437.leslie3d	80	1512	497	<b>1521</b>	<b>495</b>	1528	492	40	<b>730</b>	<b>515</b>	729	515	730	515
444.namd	80	<b>542</b>	<b>1180</b>	541	1190	543	1180	80	<b>538</b>	<b>1190</b>	540	1190	538	1190
447.dealII	80	422	2170	<b>425</b>	<b>2150</b>	430	2130	80	422	2170	<b>425</b>	<b>2150</b>	430	2130
450.soplex	80	<b>1251</b>	<b>533</b>	1252	533	1247	535	40	<b>513</b>	<b>650</b>	512	652	517	645
453.povray	80	<b>233</b>	<b>1830</b>	233	1820	231	1840	80	<b>196</b>	<b>2170</b>	197	2160	195	2180
454.calculix	80	316	2090	<b>315</b>	<b>2090</b>	314	2100	80	316	2090	<b>315</b>	<b>2090</b>	314	2100
459.GemsFDTD	80	1769	480	1774	478	<b>1774</b>	<b>479</b>	80	1769	480	1774	478	<b>1774</b>	<b>479</b>
465.tonto	80	625	1260	633	1240	<b>633</b>	<b>1240</b>	80	613	1290	608	1300	<b>610</b>	<b>1290</b>
470.lbm	80	<b>1135</b>	<b>968</b>	1135	969	1137	967	80	<b>1135</b>	<b>968</b>	1135	969	1137	967
481.wrf	80	<b>1081</b>	<b>827</b>	1080	827	1081	826	80	<b>1081</b>	<b>827</b>	1080	827	1081	826
482.sphinx3	80	1642	949	1657	941	<b>1651</b>	<b>945</b>	80	<b>1642</b>	<b>949</b>	1657	941	<b>1651</b>	<b>945</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

## Platform Notes

BIOS Configuration:

Power Profile set to Custom  
Power Regulator to Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
Energy/Performance Bias set to Maximum Performance  
Collaborative Power Control set to Disabled  
QPI Snoop Configuration set to Cluster on Die  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-hiyk Tue Nov 8 21:09:20 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2698 v4 @ 2.20GHz  
 2 "physical id"s (chips)  
 80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 20  
 siblings : 40  
 physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
 physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
cache size : 25600 KB

From /proc/meminfo  
MemTotal: 264541156 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP1

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
 SUSE Linux Enterprise Server 12 (x86\_64)  
 VERSION = 12  
 PATCHLEVEL = 1  
 # This file is deprecated and will be removed in a future service pack or release.  
 # Please check /etc/os-release for details about this release.  
os-release:  
 NAME="SLES"  
 VERSION="12-SP1"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-hiyk 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 8 09:19
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   331G   72G  259G  22% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP I37 09/14/2016
```

Memory:

```
 8x UNKNOWN NOT AVAILABLE
 16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:  
16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
450.soplex: `-D_FILE_OFFSET_BITS=64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
465.tonto: `-DSPEC_CPU_LP64`  
470.lbm: `-DSPEC_CPU_LP64`  
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -fno-alias -auto-ilp32  
           -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -qopt-malloc-options=3  
           -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
           -no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
           -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
           -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
           -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.20 GHz, Intel Xeon E5-2698 v4)

**SPECfp\_rate2006 = 1070**

**SPECfp\_rate\_base2006 = 1040**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2016

**Hardware Availability:** Dec-2016

**Software Availability:** Sep-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 29 19:08:02 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 November 2016.