



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

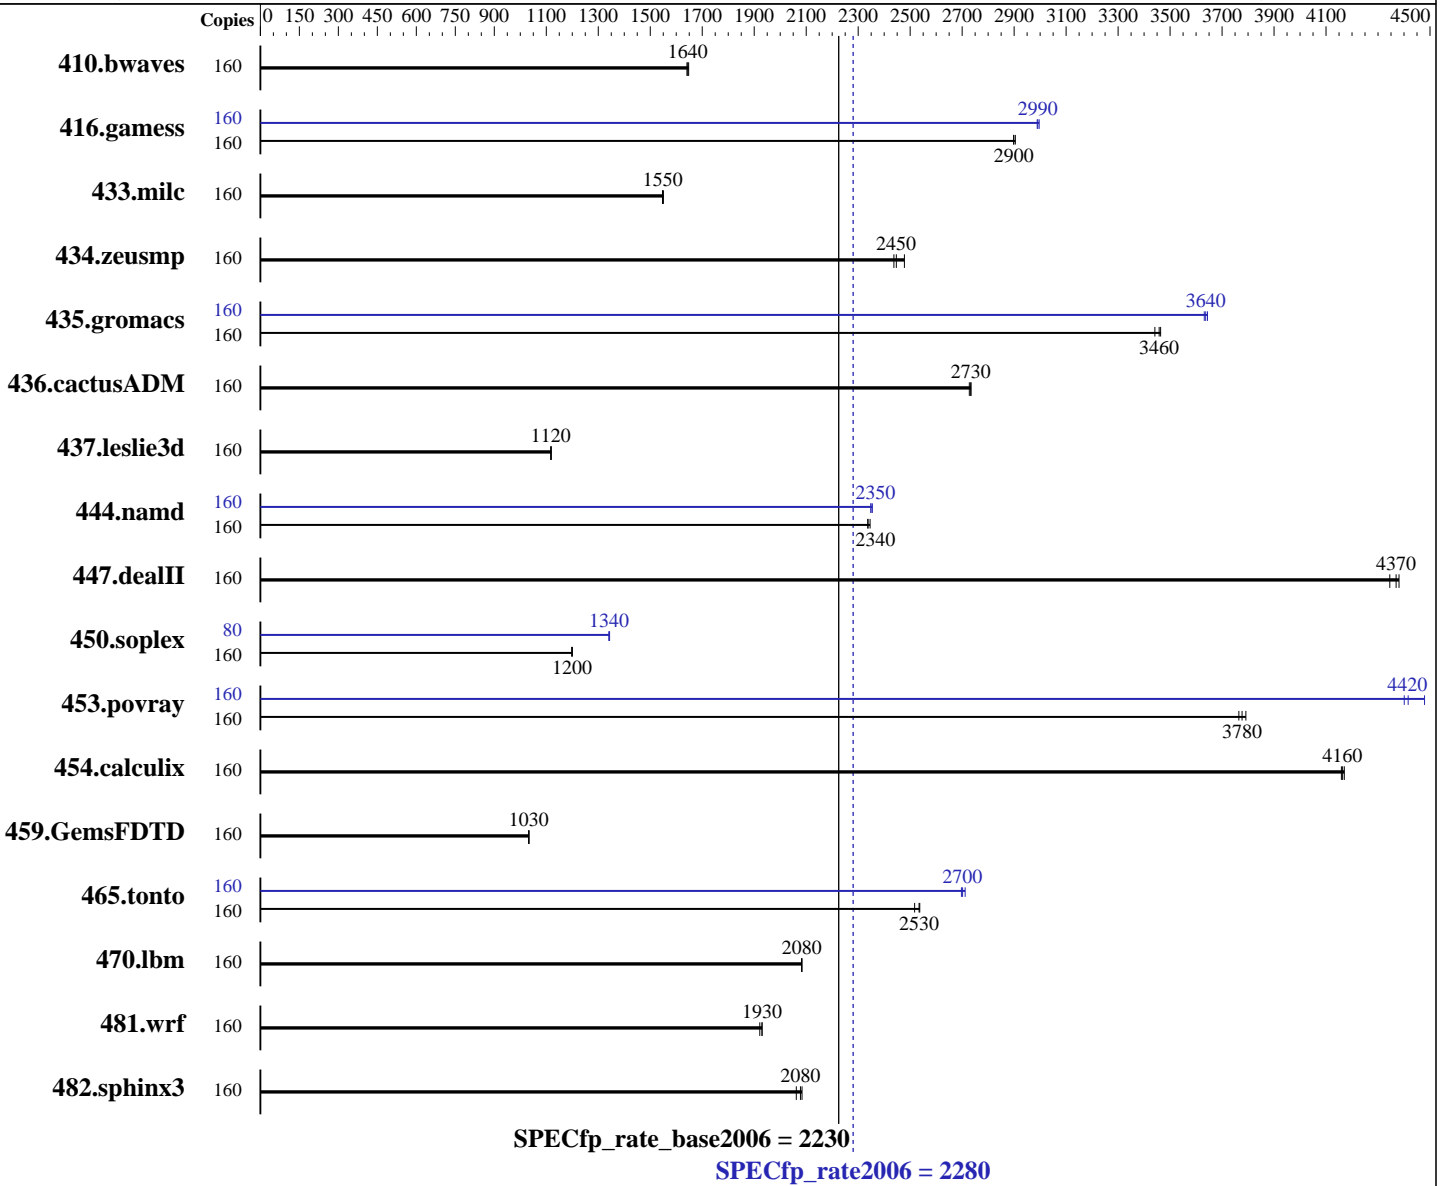

### Hardware

CPU Name: Intel Xeon E7-8870 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 80 cores, 4 chips, 20 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

L3 Cache: 50 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	160	1320	1650	<b><u>1322</u></b>	<b><u>1640</u></b>	1325	1640	160	1320	1650	<b><u>1322</u></b>	<b><u>1640</u></b>	1325	1640
416.gamess	160	1079	2900	<b><u>1081</u></b>	<b><u>2900</u></b>	1081	2900	160	<b><u>1047</u></b>	<b><u>2990</u></b>	1046	3000	1048	2990
433.milc	160	947	1550	949	1550	<b><u>949</u></b>	<b><u>1550</u></b>	160	947	1550	949	1550	<b><u>949</u></b>	<b><u>1550</u></b>
434.zeusmp	160	<b><u>595</u></b>	<b><u>2450</u></b>	597	2440	588	2480	160	<b><u>595</u></b>	<b><u>2450</u></b>	597	2440	588	2480
435.gromacs	160	<b><u>330</u></b>	<b><u>3460</u></b>	332	3440	330	3460	160	<b><u>314</u></b>	<b><u>3640</u></b>	314	3640	315	3630
436.cactusADM	160	699	2730	<b><u>700</u></b>	<b><u>2730</u></b>	701	2730	160	699	2730	<b><u>700</u></b>	<b><u>2730</u></b>	701	2730
437.leslie3d	160	<b><u>1346</u></b>	<b><u>1120</u></b>	1344	1120	1346	1120	160	<b><u>1346</u></b>	<b><u>1120</u></b>	1344	1120	1346	1120
444.namd	160	547	2350	<b><u>549</u></b>	<b><u>2340</u></b>	549	2340	160	545	2350	<b><u>546</u></b>	<b><u>2350</u></b>	546	2350
447.dealII	160	421	4350	<b><u>419</u></b>	<b><u>4370</u></b>	418	4380	160	421	4350	<b><u>419</u></b>	<b><u>4370</u></b>	418	4380
450.soplex	160	1112	1200	<b><u>1113</u></b>	<b><u>1200</u></b>	1114	1200	80	497	1340	<b><u>497</u></b>	<b><u>1340</u></b>	498	1340
453.povray	160	226	3760	224	3790	<b><u>225</u></b>	<b><u>3780</u></b>	160	190	4480	<b><u>193</u></b>	<b><u>4420</u></b>	193	4400
454.calculix	160	<b><u>317</u></b>	<b><u>4160</u></b>	317	4160	317	4170	160	<b><u>317</u></b>	<b><u>4160</u></b>	317	4160	317	4170
459.GemsFDTD	160	1643	1030	1645	1030	<b><u>1643</u></b>	<b><u>1030</u></b>	160	1643	1030	1645	1030	<b><u>1643</u></b>	<b><u>1030</u></b>
465.tonto	160	625	2520	<b><u>621</u></b>	<b><u>2530</u></b>	621	2540	160	584	2700	<b><u>583</u></b>	<b><u>2700</u></b>	581	2710
470.lbm	160	1056	2080	1055	2080	<b><u>1055</u></b>	<b><u>2080</u></b>	160	1056	2080	1055	2080	<b><u>1055</u></b>	<b><u>2080</u></b>
481.wrf	160	926	1930	<b><u>926</u></b>	<b><u>1930</u></b>	930	1920	160	926	1930	<b><u>926</u></b>	<b><u>1930</u></b>	930	1920
482.sphinx3	160	<b><u>1501</u></b>	<b><u>2080</u></b>	1496	2080	1512	2060	160	<b><u>1501</u></b>	<b><u>2080</u></b>	1496	2080	1512	2060

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock\_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set C-State to C0/C1

Set COD Mode to enabled

Sysinfo program /spec16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Sun Dec 11 01:14:02 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8870 v4 @ 2.10GHz

4 "physical id"s (chips)

160 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 20

siblings : 40

physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

cache size : 25600 KB

From /proc/meminfo

MemTotal: 528062540 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.2 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.2"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.2:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.2:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-327.el7.x86\_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86\_64 x86\_64 x86\_64 GNU/Linux

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Platform Notes (Continued)

run-level 3 Dec 10 12:24

SPEC is set to: /spec16

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	407G	153G	233G	40%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV788 11/07/2016

Memory:

32x Hynix HMA82GR7AFR8N-UH 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec16/libs/32:/spec16/libs/64:/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 2280

Huawei CH242 V3 (Intel Xeon E7-8870 v4)

SPECfp\_rate\_base2006 = 2230

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 28 10:52:47 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 December 2016.