




SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,
2.50GHz

SPECfp®_rate2006 = Not Run
SPECfp_rate_base2006 = 7000

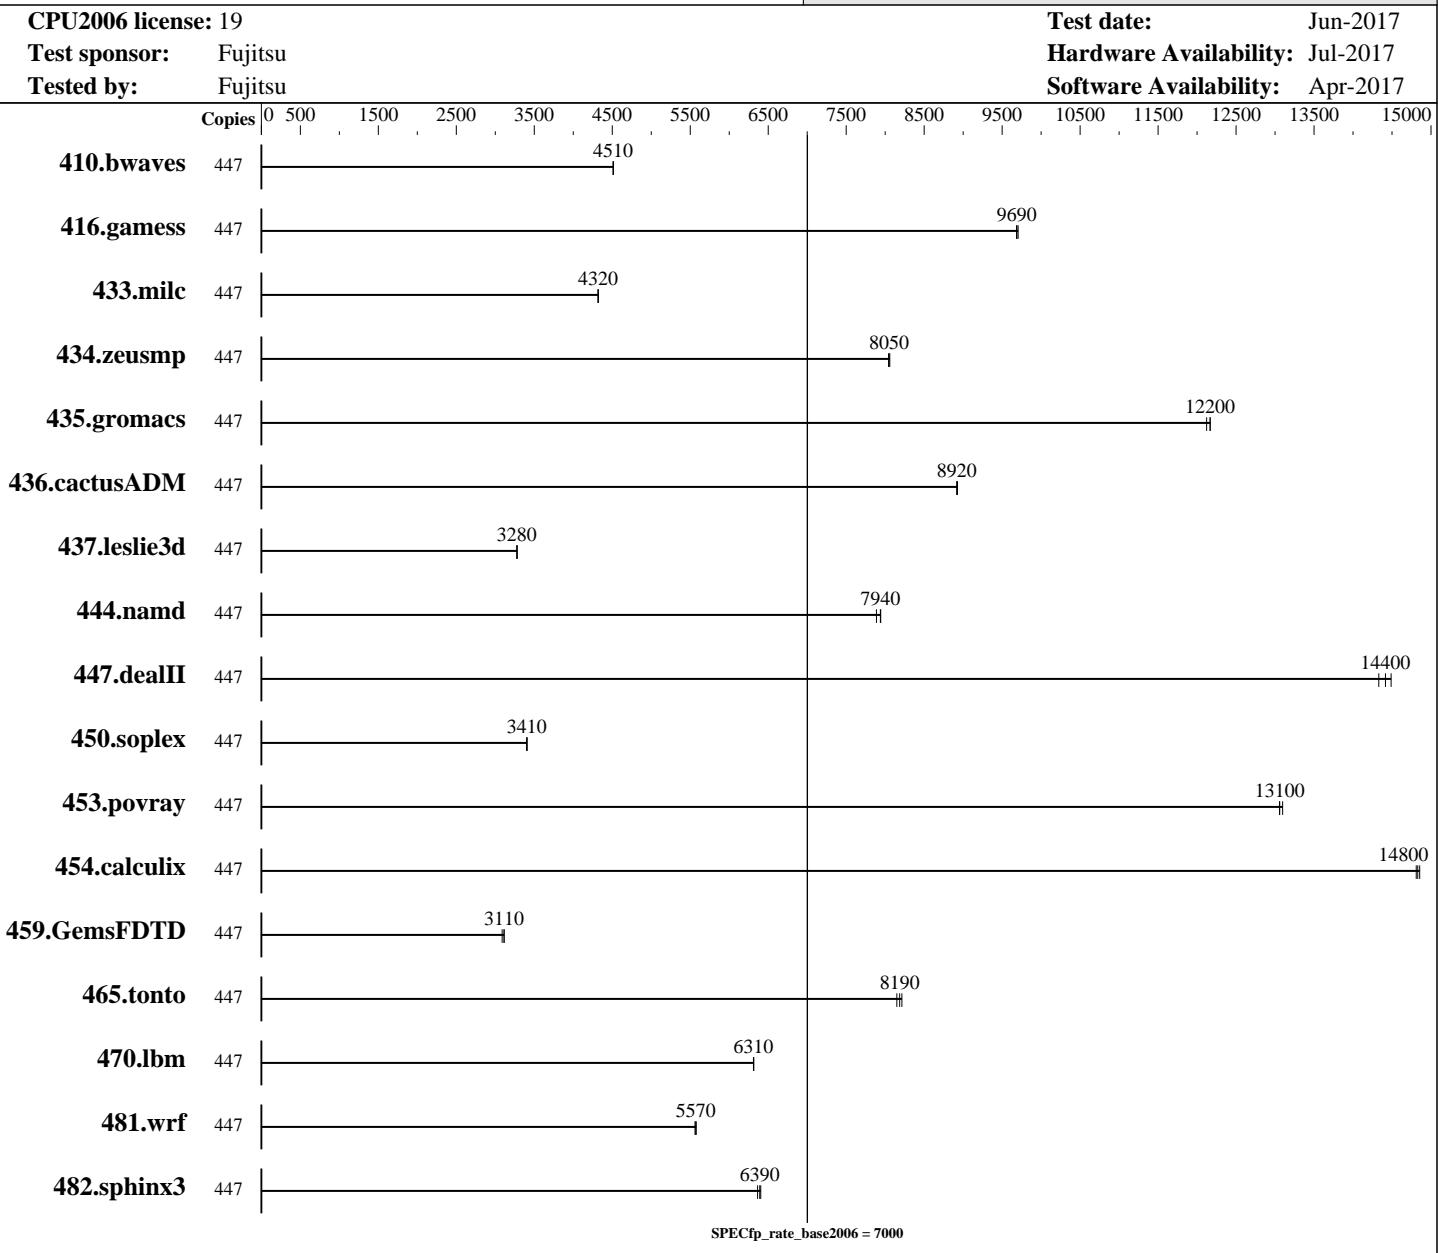

Hardware

CPU Name: Intel Xeon Platinum 8180
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 224 cores, 8 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable: 2,4,6,8 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: tmpfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,
2.50GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 6044 GB tmpfs
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|--------------|-------------|-------------|-------------|--------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 447 | 1346 | 4510 | 1346 | 4510 | 1346 | 4510 | | | | | | | |
| 416.gamess | 447 | 902 | 9700 | 903 | 9690 | 904 | 9680 | | | | | | | |
| 433.milc | 447 | 950 | 4320 | 950 | 4320 | 950 | 4320 | | | | | | | |
| 434.zeusmp | 447 | 505 | 8060 | 505 | 8050 | 506 | 8040 | | | | | | | |
| 435.gromacs | 447 | 262 | 12200 | 262 | 12200 | 263 | 12100 | | | | | | | |
| 436.cactusADM | 447 | 599 | 8920 | 598 | 8930 | 599 | 8920 | | | | | | | |
| 437.leslie3d | 447 | 1282 | 3280 | 1281 | 3280 | 1282 | 3280 | | | | | | | |
| 444.namd | 447 | 451 | 7940 | 452 | 7940 | 454 | 7890 | | | | | | | |
| 447.dealII | 447 | 355 | 14400 | 357 | 14300 | 353 | 14500 | | | | | | | |
| 450.soplex | 447 | 1095 | 3400 | 1094 | 3410 | 1095 | 3410 | | | | | | | |
| 453.povray | 447 | 182 | 13100 | 182 | 13100 | 182 | 13100 | | | | | | | |
| 454.calculix | 447 | 248 | 14900 | 249 | 14800 | 249 | 14800 | | | | | | | |
| 459.GemsFDTD | 447 | 1536 | 3090 | 1524 | 3110 | 1524 | 3110 | | | | | | | |
| 465.tonto | 447 | 540 | 8150 | 535 | 8210 | 537 | 8190 | | | | | | | |
| 470.lbm | 447 | 972 | 6320 | 973 | 6310 | 973 | 6310 | | | | | | | |
| 481.wrf | 447 | 895 | 5580 | 896 | 5570 | 898 | 5560 | | | | | | | |
| 482.sphinx3 | 447 | 1360 | 6400 | 1363 | 6390 | 1369 | 6360 | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Kernel Boot Parameter set with : nohz_full=1-447 isolcpus=1-447
 Turbo mode set with:
 cpupower -c all frequency-set -g performance
 Tmpfs filesystem can be set with:
 mkdir /home/memory
 mount -t tmpfs -o size=6044g,rw tmpfs /home/memory
 Process tunning setting:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,
2.50GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19

Test date: Jun-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Apr-2017

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
```

Platform Notes

BIOS configuration:

```
Intel Virtualization Technology = Disabled
Enable CPU HWPM = Disabled
Override OS Energy Performance = Enabled
Utilization Profile = Unbalanced
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sysinfo program /home/memory/SPECcpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-k55j Sun Jun 25 13:04:30 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
    8 "physical id"s (chips)
    448 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 28
    siblings : 56
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
    physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
    25 26 27 28 29 30
cache size : 39424 KB
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,
2.50GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19

Test date: Jun-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Apr-2017

Platform Notes (Continued)

```
From /proc/meminfo
MemTotal:       3169249540 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 25 04:19
```

```
SPEC is set to: /home/memory/SPECcpu
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  6.0T  7.0G  5.9T   1% /home/memory
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS FUJITSU V1.0.0.0 R0.43.5 for D9989-B2x
```

```
06/23/2017
```

```
Memory:
```

```
96x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
```

```
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/memory/SPECcpu/lib/ia32:/home/memory/SPECcpu/lib/intel64:/home/memory/SPECcpu/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,
2.50GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19

Test date: Jun-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Apr-2017

General Notes (Continued)

```
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8180,
2.50GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 7000

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Oct 2 17:05:11 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 July 2017.