



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55


Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

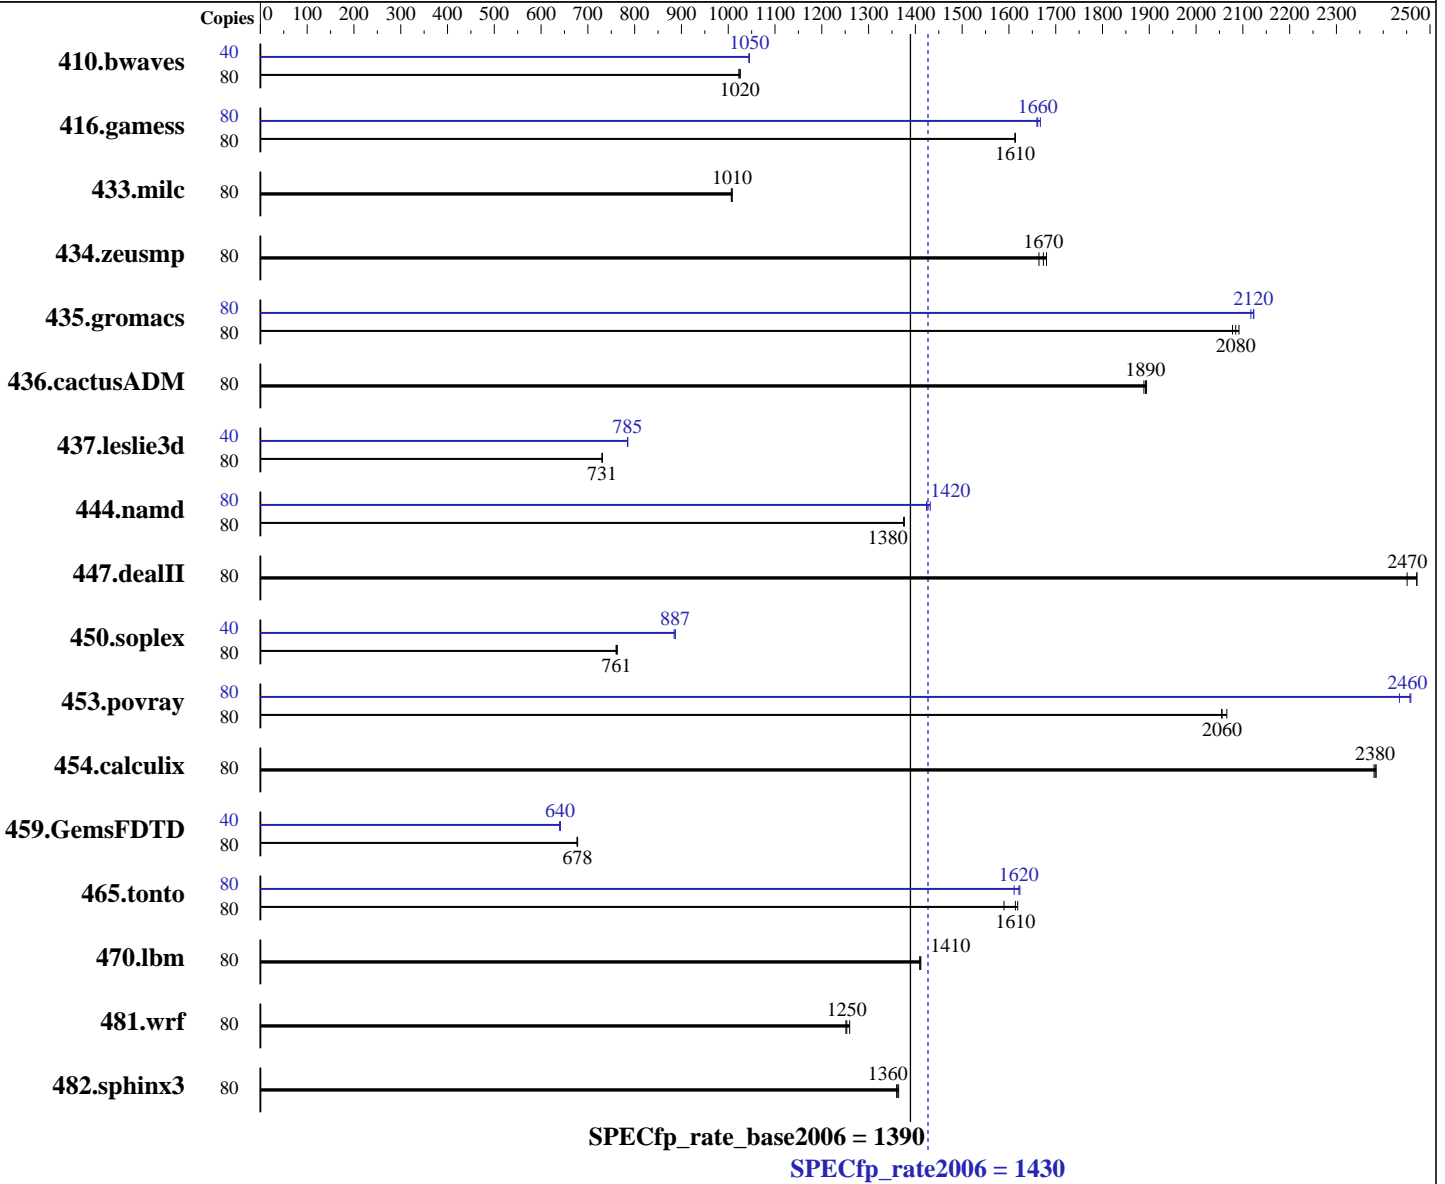

Hardware

CPU Name: Intel Xeon Gold 6148F
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

L3 Cache: 27.5 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	80	1061	1020	1060	1030	1063	1020	40	520	1050	521	1040	520	1050
416.gamess	80	971	1610	971	1610	971	1610	80	940	1670	943	1660	944	1660
433.milc	80	729	1010	730	1010	728	1010	80	729	1010	730	1010	728	1010
434.zeusmp	80	435	1670	437	1660	433	1680	80	435	1670	437	1660	433	1680
435.gromacs	80	273	2090	275	2080	274	2080	80	269	2120	269	2120	270	2120
436.cactusADM	80	506	1890	505	1890	505	1890	80	506	1890	505	1890	505	1890
437.leslie3d	80	1030	730	1029	731	1028	731	40	479	785	479	785	479	785
444.namd	80	466	1380	466	1380	467	1370	80	450	1420	450	1420	448	1430
447.dealII	80	370	2470	373	2450	370	2470	80	370	2470	373	2450	370	2470
450.soplex	80	874	763	877	760	877	761	40	377	884	376	887	376	887
453.povray	80	206	2070	207	2050	207	2060	80	173	2460	173	2460	175	2430
454.calculix	80	277	2380	277	2390	277	2380	80	277	2380	277	2390	277	2380
459.GemsFDTD	80	1252	678	1252	678	1254	677	40	664	640	662	641	663	640
465.tonto	80	486	1620	488	1610	495	1590	80	486	1620	489	1610	485	1620
470.lbm	80	780	1410	779	1410	779	1410	80	780	1410	779	1410	779	1410
481.wrf	80	713	1250	709	1260	714	1250	80	713	1250	709	1260	714	1250
482.sphinx3	80	1143	1360	1146	1360	1145	1360	80	1143	1360	1146	1360	1145	1360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor enabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 Sysinfo program /root/cpu2006-1.2_icl7u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-7lna Tue Jun 27 02:54:01 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6148F CPU @ 2.40GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 20
  siblings     : 40
  physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
  physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size     : 28160 KB
```

```
From /proc/meminfo
MemTotal:      394867844 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

```
uname -a:
Linux linux-7lna 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 26 16:22
```

```
SPEC is set to: /root/cpu2006-1.2_ic17u3
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda6        btrfs    272G      8.1G 263G   3% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.1 06/05/2017

Memory:

```
4x 002C00B3002C 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
4x 002C0632002C 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
4x 00AD063200AD HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz
4x Not Specified Not Specified
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2_ic17u3/lib/ia32:/root/cpu2006-1.2_ic17u3/lib/intel64:/root/cpu2006-1.2_ic17u3/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

```
runspec command invoked through numactl i.e.:
```

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll12 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll14 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 1430

PowerEdge C6420 (Intel Xeon Gold 6148F, 2.40 GHz)

SPECfp_rate_base2006 = 1390

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Aug 23 13:13:16 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 August 2017.