



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6140, 2.30GHz

SPECfp®\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1380

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

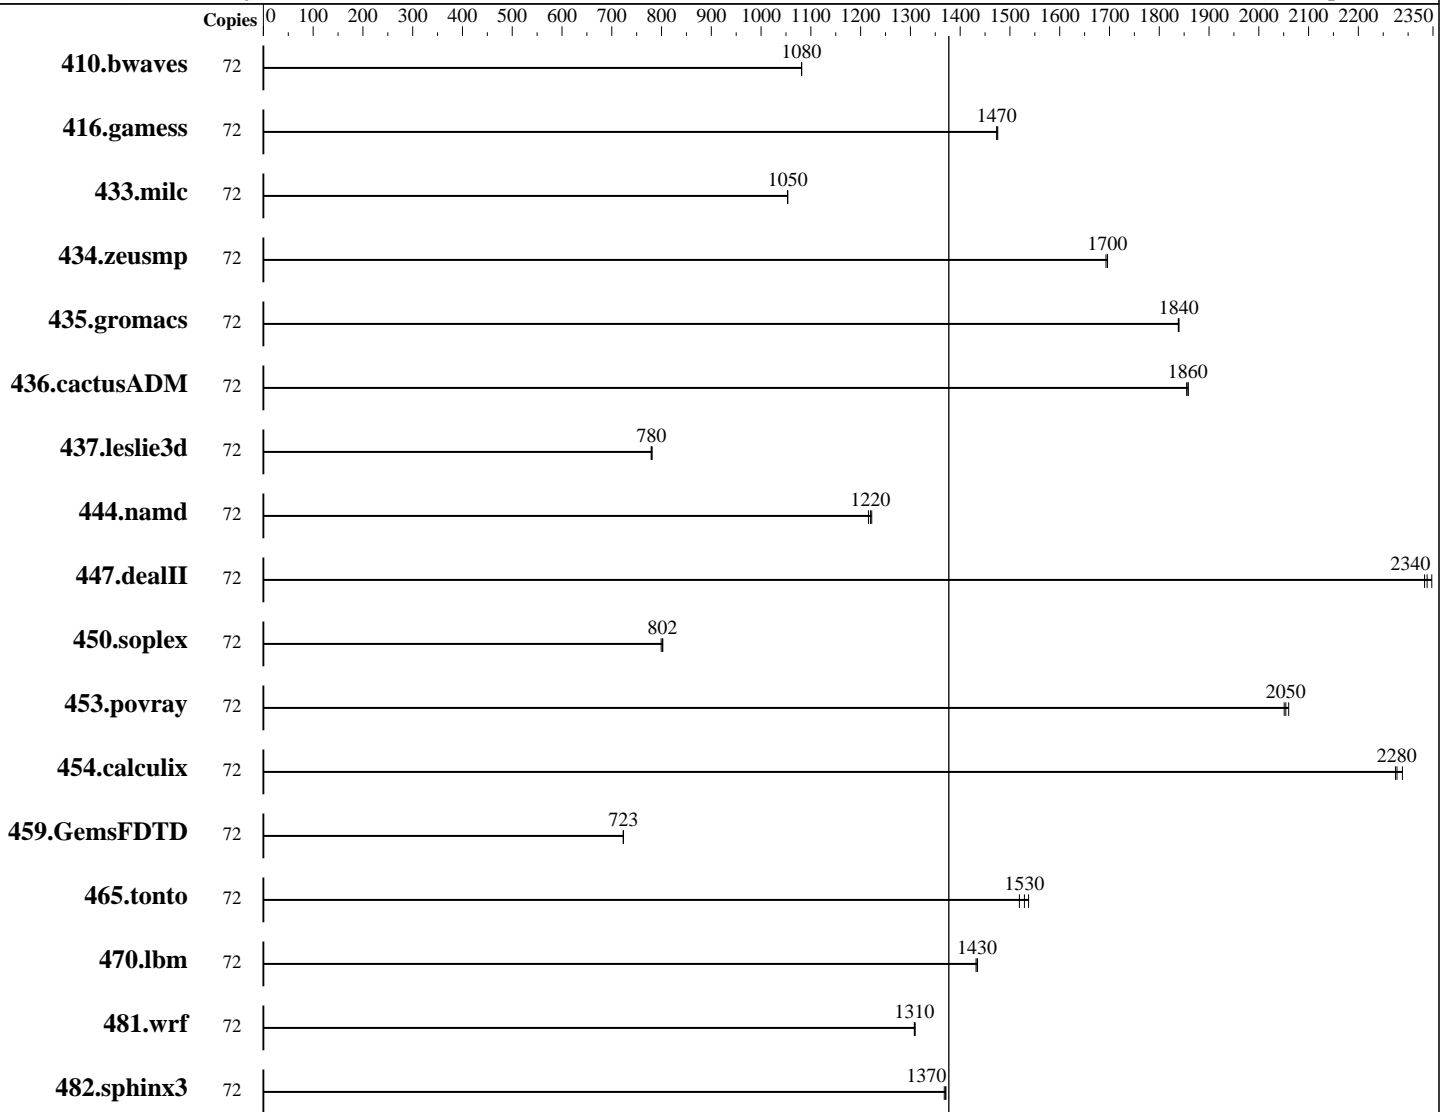

### Hardware

CPU Name: Intel Xeon Gold 6140  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6140, 2.30GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1380

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

L3 Cache: 24.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 752 GB tmpfs  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: Not Applicable  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	905	1080	<b><u>905</u></b>	<b><u>1080</u></b>	905	1080							
416.gamess	72	955	1480	957	1470	<b><u>957</u></b>	<b><u>1470</u></b>							
433.milc	72	628	1050	627	1050	<b><u>627</u></b>	<b><u>1050</u></b>							
434.zeusmp	72	<b><u>386</u></b>	<b><u>1700</u></b>	387	1690	386	1700							
435.gromacs	72	280	1840	<b><u>280</u></b>	<b><u>1840</u></b>	279	1840							
436.cactusADM	72	463	1860	<b><u>463</u></b>	<b><u>1860</u></b>	464	1850							
437.leslie3d	72	<b><u>868</u></b>	<b><u>780</u></b>	866	781	869	779							
444.namd	72	<b><u>473</u></b>	<b><u>1220</u></b>	475	1220	472	1220							
447.dealII	72	351	2350	353	2330	<b><u>352</u></b>	<b><u>2340</u></b>							
450.soplex	72	<b><u>749</u></b>	<b><u>802</u></b>	751	799	748	803							
453.povray	72	186	2060	<b><u>186</u></b>	<b><u>2050</u></b>	187	2050							
454.calculix	72	260	2290	261	2270	<b><u>261</u></b>	<b><u>2280</u></b>							
459.GemsFDTD	72	1056	724	<b><u>1056</u></b>	<b><u>723</u></b>	1056	723							
465.tonto	72	466	1520	461	1540	<b><u>463</u></b>	<b><u>1530</u></b>							
470.lbm	72	691	1430	689	1430	<b><u>690</u></b>	<b><u>1430</u></b>							
481.wrf	72	614	1310	615	1310	<b><u>615</u></b>	<b><u>1310</u></b>							
482.sphinx3	72	1026	1370	<b><u>1024</u></b>	<b><u>1370</u></b>	1023	1370							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-71  
Turbo mode set with :  
cpupower -c all frequency-set -g performance  
Tmpfs filesystem can be set with:  
mkdir /home/memory  
mount -t tmpfs -o size=752g,rw tmpfs /home/memory  
Process tuning setting:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6140, 2.30GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1380

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

### Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

### Platform Notes

BIOS configuration:  
Link Frequency Select = 10.4 GT/s  
HWPM Support = Disabled  
Intel Virtualization Technology = Disabled  
Sub NUMA Clustering = Enabled  
IMC Interleaving = 1-way  
LLC Dead Line Alloc = Disabled  
Stale AtoS = Enabled  
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-zz9i Tue Aug 15 19:22:20 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6140 CPU @ 2.30GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings  : 36
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      394407124 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6140,  
2.30GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1380

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

### Platform Notes (Continued)

```

# This file is deprecated and will be removed in a future service pack or
# release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-zz9i 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 15 08:04

SPEC is set to: /home/memory/speccpu
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    752G  4.1G  748G   1% /home/memory
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.4.1 for D3383-A1x
06/19/2017
Memory:
24x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

```

### General Notes

```

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2530 M4, Intel Xeon Gold 6140,  
2.30GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1380

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2017  
Hardware Availability: Jul-2017  
Software Availability: Apr-2017

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2530 M4, Intel Xeon Gold 6140,  
2.30GHz

SPECfp\_rate2006 = Not Run

SPECfp\_rate\_base2006 = 1380

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Aug-2017  
**Hardware Availability:** Jul-2017  
**Software Availability:** Apr-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Sep 20 13:42:57 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 September 2017.