



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = Not Run

PowerEdge R740 (Intel Xeon Gold 5120T, 2.20 GHz)

SPECfp_rate_base2006 = 1060

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2017

Hardware Availability: Sep-2017

Software Availability: Nov-2016

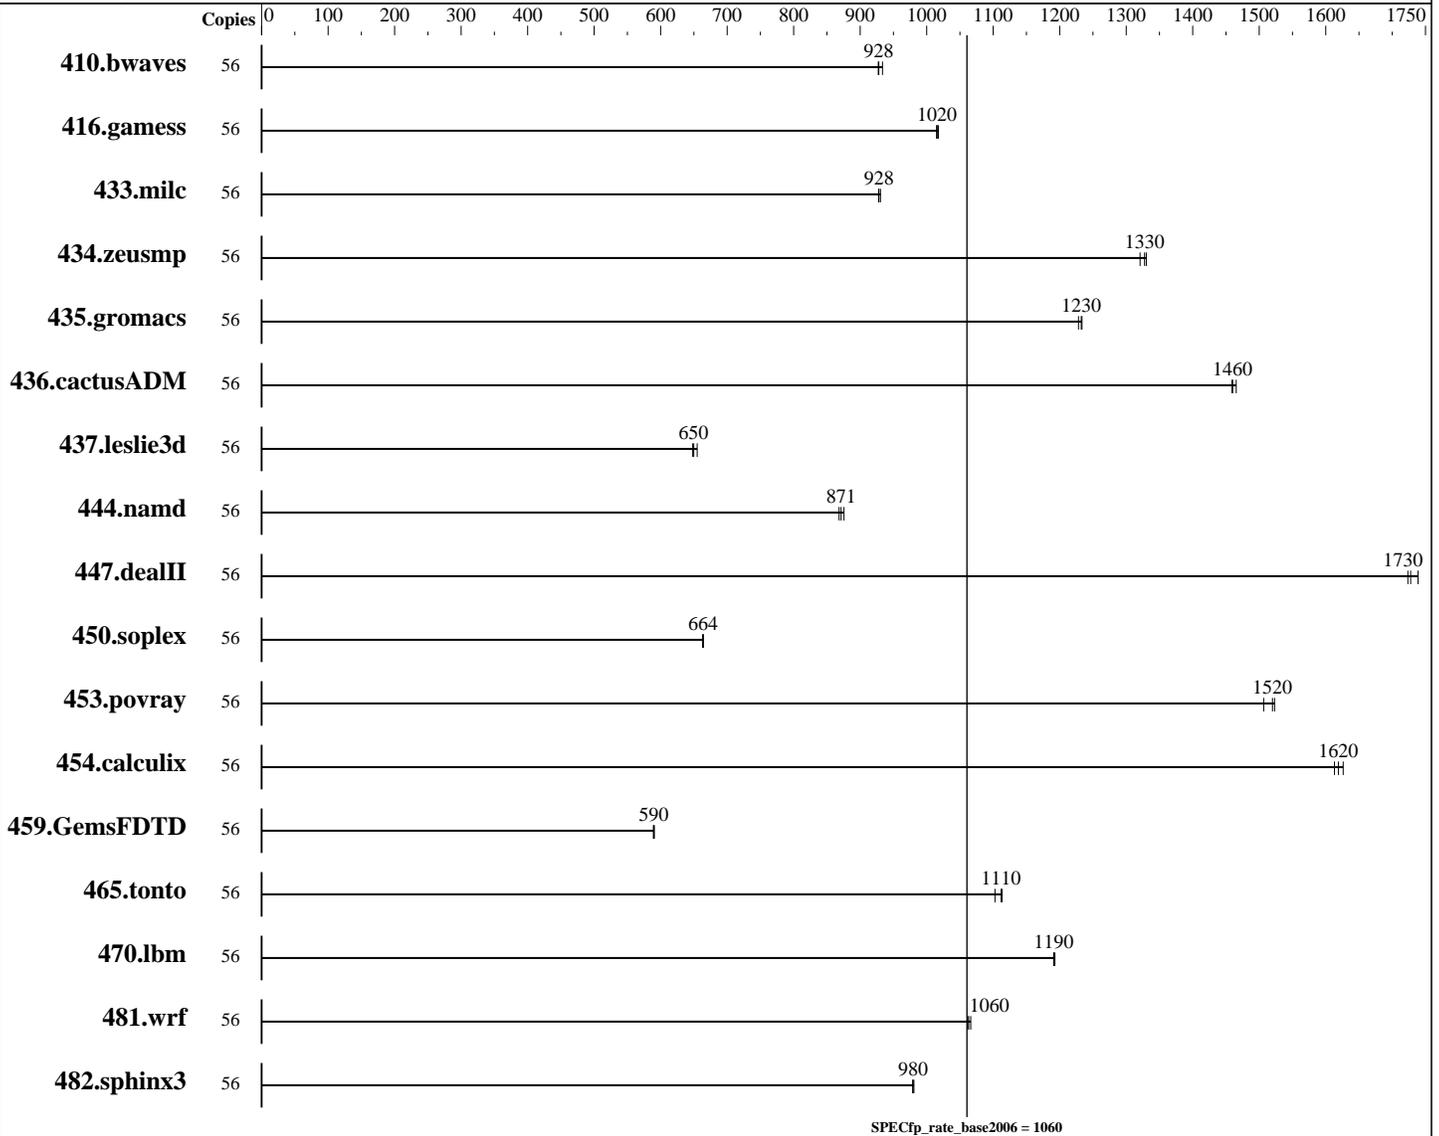

Hardware

CPU Name: Intel Xeon Gold 5120T
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R740 (Intel Xeon Gold 5120T, 2.20 GHz)

SPECfp_rate_base2006 = 1060

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

L3 Cache: 19.25 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400 MHz)
 Disk Subsystem: 1 x 960 GB SATA SSD
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	56	815	934	820	928	821	927									
416.gamess	56	1079	1020	1078	1020	1081	1010									
433.milc	56	552	931	554	928	554	928									
434.zeusmp	56	383	1330	384	1330	386	1320									
435.gromacs	56	326	1230	324	1230	324	1230									
436.cactusADM	56	457	1470	459	1460	458	1460									
437.leslie3d	56	804	655	812	648	810	650									
444.namd	56	515	871	513	876	517	868									
447.dealII	56	368	1740	372	1720	371	1730									
450.soplex	56	704	664	704	663	703	664									
453.povray	56	196	1520	196	1520	198	1510									
454.calculix	56	285	1620	284	1630	286	1610									
459.GemsFDTD	56	1008	590	1009	589	1006	590									
465.tonto	56	496	1110	500	1100	495	1110									
470.lbm	56	645	1190	646	1190	646	1190									
481.wrf	56	588	1060	589	1060	587	1070									
482.sphinx3	56	1115	979	1114	980	1113	981									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Sub NUMA Cluster enabled
Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R740 (Intel Xeon Gold 5120T, 2.20 GHz)

SPECfp_rate_base2006 = 1060

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

System Profile set to Custom
 CPU Performance set to Maximum Performance
 C States set to Autonomous
 C1E disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Performance
 Memory Patrol Scrub disabled
 Logical Processor enabled
 CPU Interconnect Bus Link Power Management disabled
 PCI ASPM L1 Link Power Management disabled
 Sysinfo program /root/cpu2006-1.2_icl17u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-wwko Wed Sep 13 17:55:47 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5120T CPU @ 2.20GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 19712 KB
```

```
From /proc/meminfo
MemTotal:      394867840 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R740 (Intel Xeon Gold 5120T, 2.20 GHz)

SPECfp_rate_base2006 = 1060

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-wwko 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 13 12:18
```

```
SPEC is set to: /root/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   892G   38G  855G   5% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.7 07/01/2017

Memory:

24x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2_ic17u3/lib/ia32:/root/cpu2006-1.2_ic17u3/lib/intel64:/root/cpu2006-1.2_ic17u3/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R740 (Intel Xeon Gold 5120T, 2.20 GHz)

SPECfp_rate_base2006 = 1060

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = Not Run

PowerEdge R740 (Intel Xeon Gold 5120T, 2.20 GHz)

SPECfp_rate_base2006 = 1060

CPU2006 license: 55

Test date: Sep-2017

Test sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Nov-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 4 12:38:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2017.