



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

### SPECfp®\_rate2006 = 1160

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

### SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017


Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

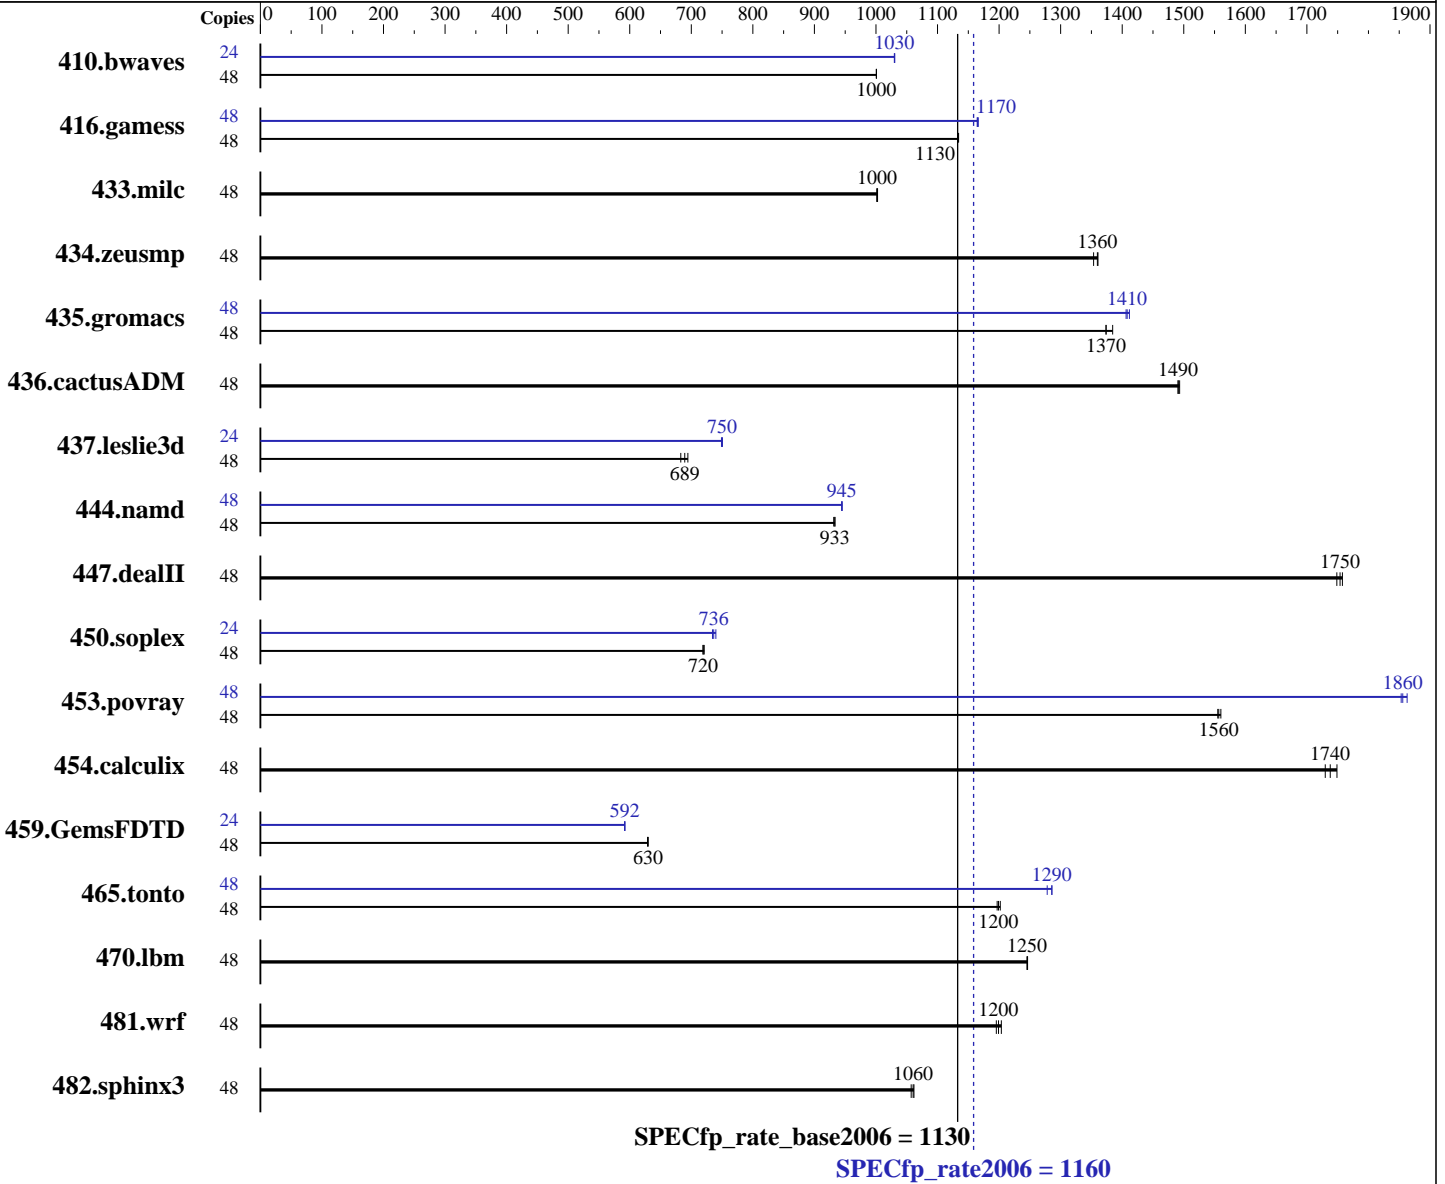

### Hardware

CPU Name: Intel Xeon Gold 6126  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate2006 = 1160

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

L3 Cache: 19.25 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	652	1000	652	1000	<u>652</u>	<u>1000</u>	24	<u>317</u>	<u>1030</u>	317	1030	317	1030
416.gamess	48	829	1130	830	1130	<u>829</u>	<u>1130</u>	48	807	1160	<u>807</u>	<u>1170</u>	806	1170
433.milc	48	<u>440</u>	<u>1000</u>	440	1000	439	1000	48	<u>440</u>	<u>1000</u>	440	1000	439	1000
434.zeusmp	48	321	1360	<u>321</u>	<u>1360</u>	323	1350	48	321	1360	<u>321</u>	<u>1360</u>	323	1350
435.gromacs	48	249	1370	248	1380	<u>249</u>	<u>1370</u>	48	244	1410	243	1410	<u>243</u>	<u>1410</u>
436.cactusADM	48	<u>385</u>	<u>1490</u>	385	1490	384	1490	48	<u>385</u>	<u>1490</u>	385	1490	384	1490
437.leslie3d	48	661	683	650	694	<u>655</u>	<u>689</u>	24	301	749	<u>301</u>	<u>750</u>	301	751
444.namd	48	<u>413</u>	<u>933</u>	412	933	413	931	48	408	944	<u>407</u>	<u>945</u>	407	945
447.dealII	48	<u>313</u>	<u>1750</u>	312	1760	314	1750	48	<u>313</u>	<u>1750</u>	312	1760	314	1750
450.soplex	48	<u>556</u>	<u>720</u>	555	721	557	719	24	273	734	<u>272</u>	<u>736</u>	271	740
453.povray	48	<u>164</u>	<u>1560</u>	164	1560	164	1560	48	<u>138</u>	<u>1860</u>	137	1860	138	1850
454.calculix	48	226	1750	<u>228</u>	<u>1740</u>	229	1730	48	226	1750	<u>228</u>	<u>1740</u>	229	1730
459.GemsFDTD	48	<u>809</u>	<u>630</u>	809	630	810	629	24	430	592	430	592	<u>430</u>	<u>592</u>
465.tonto	48	395	1200	393	1200	<u>394</u>	<u>1200</u>	48	367	1290	370	1280	<u>367</u>	<u>1290</u>
470.lbm	48	<u>529</u>	<u>1250</u>	530	1250	529	1250	48	<u>529</u>	<u>1250</u>	530	1250	529	1250
481.wrf	48	<u>447</u>	<u>1200</u>	445	1200	448	1200	48	<u>447</u>	<u>1200</u>	445	1200	448	1200
482.sphinx3	48	885	1060	881	1060	<u>882</u>	<u>1060</u>	48	885	1060	881	1060	<u>882</u>	<u>1060</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Execute Disable Bit set to Disable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECfp\_rate2006 = 1160

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

### Platform Notes (Continued)

```

DCU Streamer Prefetcher set to Disable
SNC set to Enable
Intel Virtualization Technology set to Disable
LLC dead line alloc set to Disable
Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SN550 Tue Sep  5 17:40:52 2017

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 3 4 5 6 8 9 10 11 12 13
  physical 1: cores 0 1 2 4 5 6 8 9 10 11 13 14
cache size : 19712 KB

```

```

From /proc/meminfo
MemTotal:      792245152 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux SN550 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 5 17:40

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1160

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

## Platform Notes (Continued)

```

SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   687G  46G  642G   7% /home
Additional information from dmidecode:

```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

BIOS Lenovo -[IVE109A-1.00]- 04/27/2017
Memory:
 24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1160

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp\_rate2006 = 1160

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate2006 = 1160

SPECfp\_rate\_base2006 = 1130

CPU2006 license: 9017

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp\_rate2006 = 1160

SPECfp\_rate\_base2006 = 1130

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Sep-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Nov-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Oct 4 12:40:23 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 October 2017.