



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.10 GHz, Intel Xeon Platinum 8160)

**SPECfp®\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

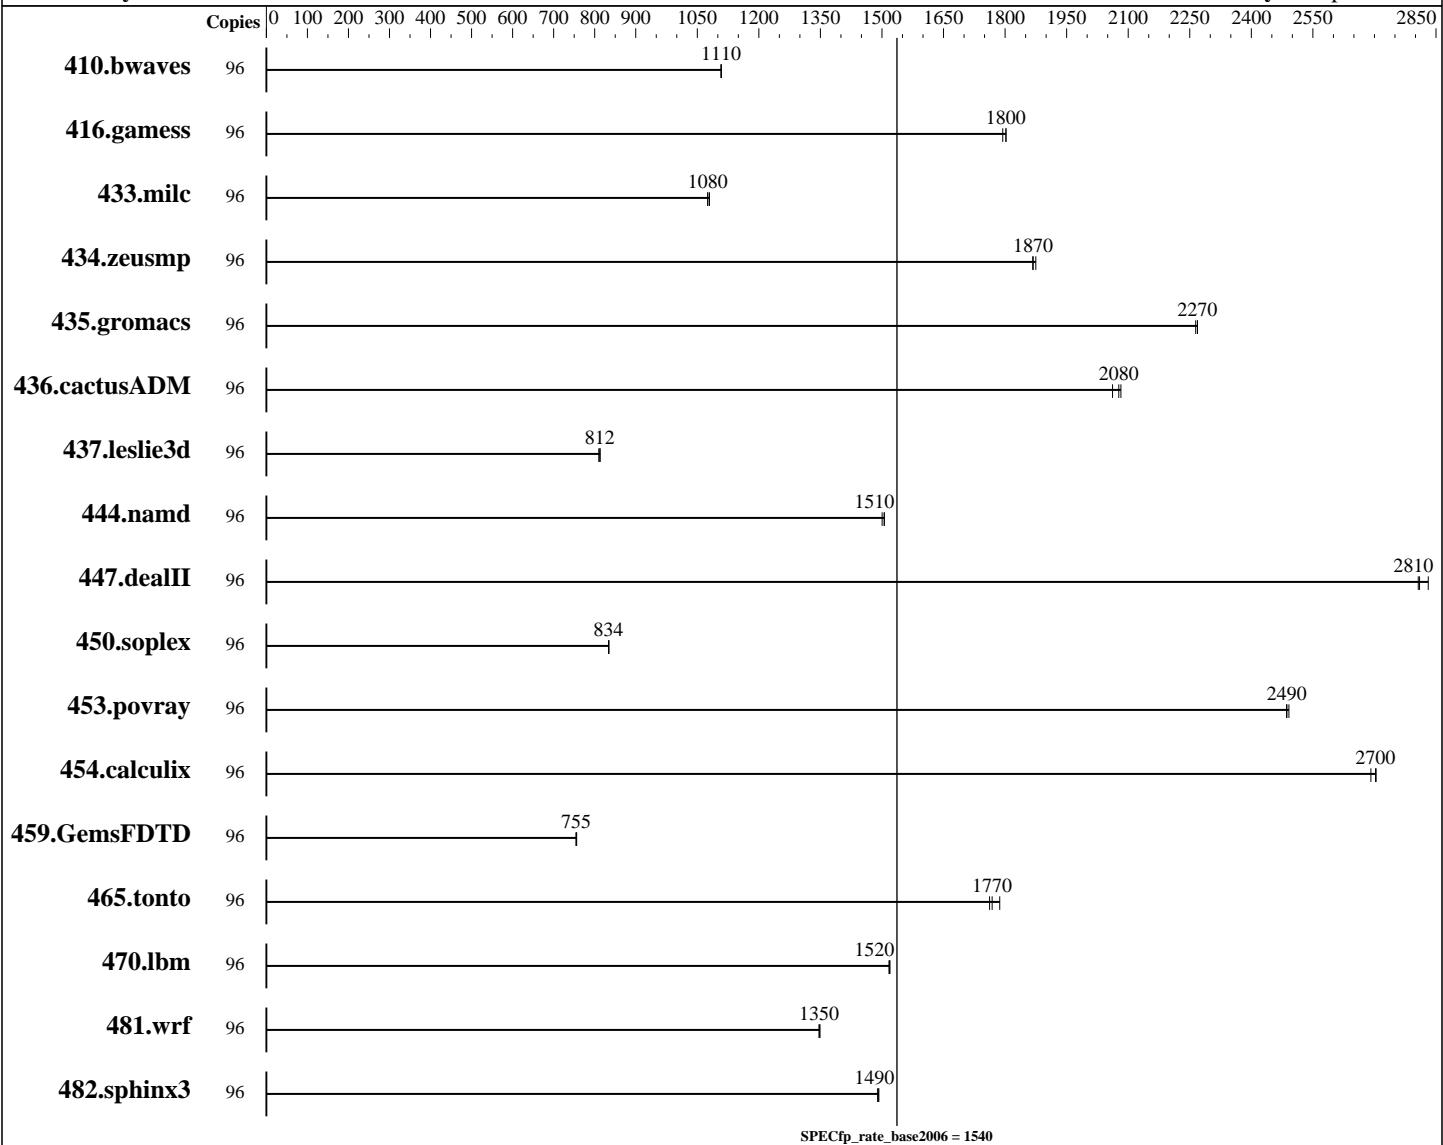

## Hardware

CPU Name: Intel Xeon Platinum 8160  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 48 cores, 2 chips, 24 cores/chip, 2 threads/core  
CPU(s) orderable: 1, 2 chip(s)  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
Compiler: Kernel 4.4.21-69-default  
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: No  
File System: btrfs  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

L3 Cache: 33 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	1177	1110	1177	1110	<b>1177</b>	<b>1110</b>							
416.gamess	96	1043	1800	1048	1790	<b>1043</b>	<b>1800</b>							
433.milc	96	819	1080	<b>819</b>	<b>1080</b>	816	1080							
434.zeusmp	96	466	1870	468	1870	<b>468</b>	<b>1870</b>							
435.gromacs	96	<b>302</b>	<b>2270</b>	303	2260	302	2270							
436.cactusADM	96	556	2060	<b>552</b>	<b>2080</b>	551	2080							
437.leslie3d	96	1109	813	1114	810	<b>1111</b>	<b>812</b>							
444.namd	96	511	1510	<b>511</b>	<b>1510</b>	513	1500							
447.dealII	96	391	2810	<b>391</b>	<b>2810</b>	388	2830							
450.soplex	96	960	834	959	835	<b>960</b>	<b>834</b>							
453.povray	96	205	2490	205	2490	<b>205</b>	<b>2490</b>							
454.calculix	96	294	2690	<b>293</b>	<b>2700</b>	293	2700							
459.GemsFDTD	96	1347	756	<b>1349</b>	<b>755</b>	1350	755							
465.tonto	96	529	1790	536	1760	<b>534</b>	<b>1770</b>							
470.lbm	96	868	1520	<b>869</b>	<b>1520</b>	869	1520							
481.wrf	96	795	1350	796	1350	<b>796</b>	<b>1350</b>							
482.sphinx3	96	1256	1490	1254	1490	<b>1255</b>	<b>1490</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Operating System Notes (Continued)

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa\_balancing"

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetcher set to Enabled  
LLC Dead Line Allocation set to Disabled  
Workload Pofile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on sys1-dl380-suse Sat Oct 7 05:00:46 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8160 CPU @ 2.10GHz
        2 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 24
        siblings : 48
        physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28
        29
        physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28
        29
cache size : 33792 KB
```

```
From /proc/meminfo
MemTotal:      197545204 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
# Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux sys1-dl380-suse 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 6 22:44

SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        btrfs 489G   21G  467G   5% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017
Memory:
 24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8160)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 1540**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 1 00:54:36 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 October 2017.