



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 2710**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

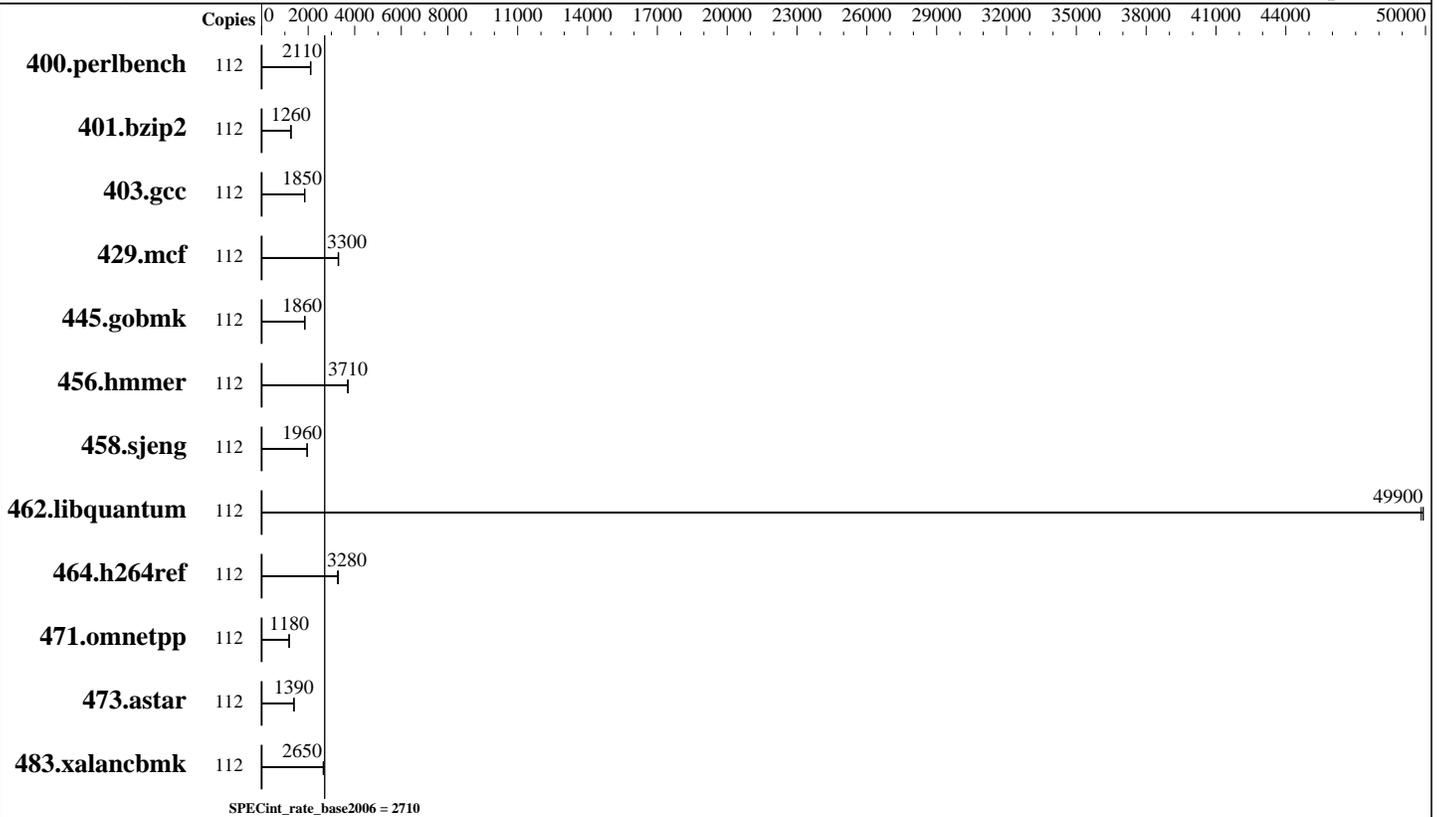

## Hardware

CPU Name: Intel Xeon Platinum 8180  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux  
 Auto Parallel: No  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: Not Applicable  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.50 GHz, Intel Xeon Platinum 8180)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2710

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	112	<u>519</u>	<u>2110</u>	522	2100	517	2120							
401.bzip2	112	863	1250	<u>857</u>	<u>1260</u>	851	1270							
403.gcc	112	<u>487</u>	<u>1850</u>	487	1850	487	1850							
429.mcf	112	<u>310</u>	<u>3300</u>	309	3310	311	3290							
445.gobmk	112	<u>633</u>	<u>1860</u>	633	1860	634	1850							
456.hammer	112	<u>282</u>	<u>3710</u>	281	3710	283	3700							
458.sjeng	112	<u>693</u>	<u>1960</u>	693	1960	692	1960							
462.libquantum	112	<u>46.5</u>	<u>49900</u>	46.5	49900	46.6	49800							
464.h264ref	112	751	3300	<u>756</u>	<u>3280</u>	759	3260							
471.omnetpp	112	<u>592</u>	<u>1180</u>	592	1180	592	1180							
473.astar	112	566	1390	<u>565</u>	<u>1390</u>	565	1390							
483.xalancbmk	112	<u>291</u>	<u>2650</u>	292	2650	291	2650							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
LLC Prefetcher set to Enabled  
LLC Dead Line Allocation set to Disabled  
Workload Pofile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C1E  
  
Sysinfo program /cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on local Fri Oct 13 09:07:23 2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2710

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 28
  siblings       : 56
  physical 0:    cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26
                  27 28 29 30
  physical 1:    cores 0 1 2 3 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26
                  27 28 29 30
cache size      : 39424 KB

```

From /proc/meminfo

```

MemTotal:        197528520 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux local 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016 (63cf368)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 11 21:37

SPEC is set to: /cpu2006

```

Filesystem      Type      Size  Used Avail Use% Mounted on

```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2710

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

/dev/sda3 btrfs 445G 248G 195G 57% /  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh10.2"

Binaries compiled on a system with 2x Intel Xeon Platinum 8180 CPU + 192GB RAM memory using SUSE Linux Enterprise Server 12 SP2

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2018.0.082/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2018.0.082/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.50 GHz, Intel Xeon Platinum 8180)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 2710**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

## Base Optimization Flags

C benchmarks:

`-xHOST -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3`

C++ benchmarks:

`-xHOST -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-Wl,-z,muldefs -L/cpu2006/sh10.2 -lsmartheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 1 00:54:47 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 October 2017.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5