



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10  
(2.20 GHz, AMD EPYC 7601)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 2210**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

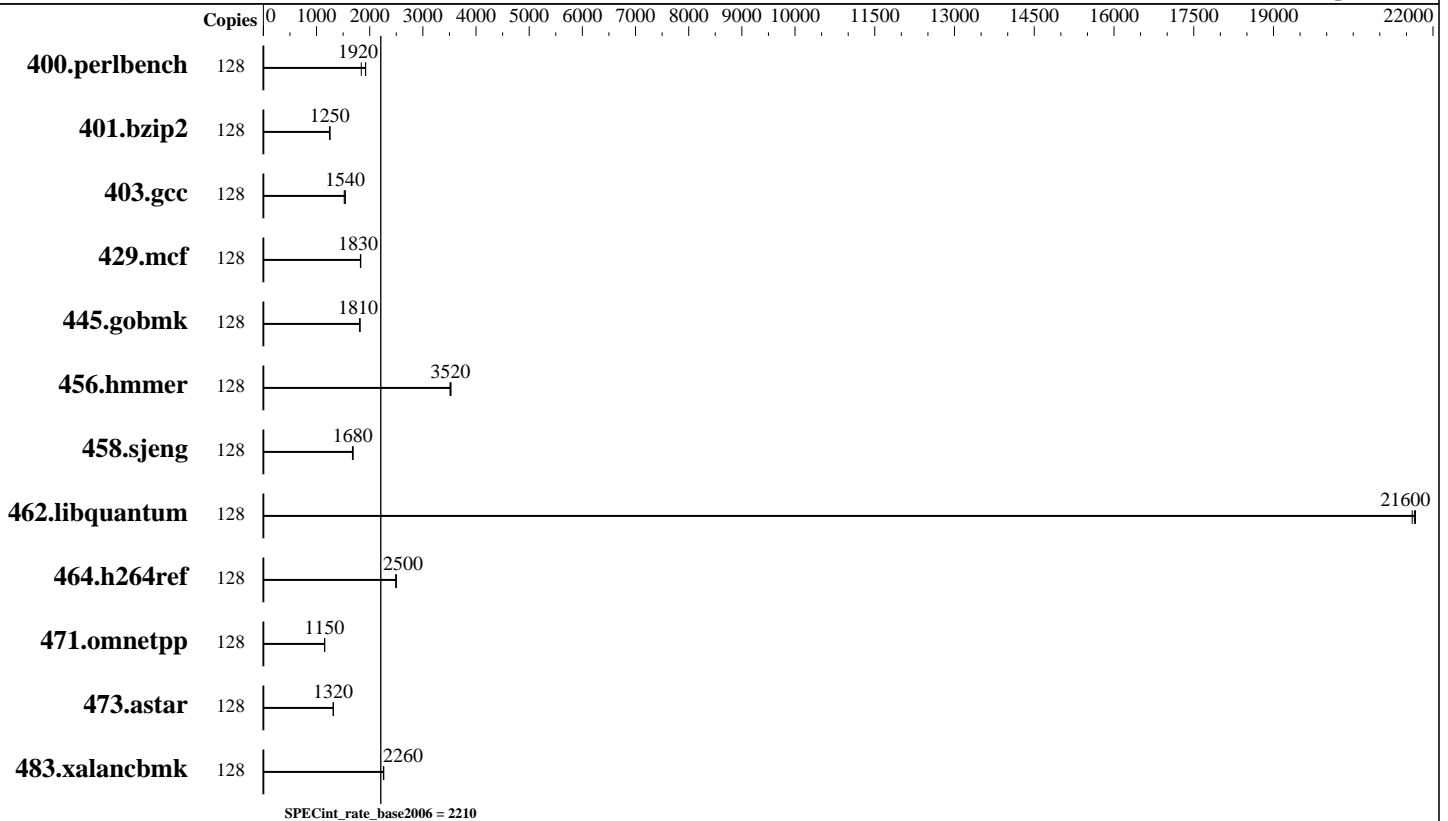

## Hardware

CPU Name: AMD EPYC 7601  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 2 chips, 32 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 64 KB I + 32 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
 Other Cache: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Disk Subsystem: 1 x 300 GB 15 K RPM SAS, RAID 0  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
 Compiler: C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: Not Applicable  
 Other Software: MicroQuill SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10  
(2.20 GHz, AMD EPYC 7601)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2210

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	679	1840	<b><u>650</u></b>	<b><u>1920</u></b>	650	1920							
401.bzip2	128	987	1250	<b><u>989</u></b>	<b><u>1250</u></b>	990	1250							
403.gcc	128	678	1520	668	1540	<b><u>671</u></b>	<b><u>1540</u></b>							
429.mcf	128	640	1830	638	1830	<b><u>638</u></b>	<b><u>1830</u></b>							
445.gobmk	128	739	1820	<b><u>740</u></b>	<b><u>1810</u></b>	741	1810							
456.hammer	128	338	3530	340	3510	<b><u>339</u></b>	<b><u>3520</u></b>							
458.sjeng	128	<b><u>921</u></b>	<b><u>1680</u></b>	918	1690	925	1680							
462.libquantum	128	122	21700	<b><u>123</u></b>	<b><u>21600</u></b>	123	21600							
464.h264ref	128	1137	2490	1133	2500	<b><u>1134</u></b>	<b><u>2500</u></b>							
471.omnetpp	128	<b><u>694</u></b>	<b><u>1150</u></b>	694	1150	696	1150							
473.astar	128	<b><u>683</u></b>	<b><u>1320</u></b>	683	1320	683	1320							
483.xalancbmk	128	<b><u>390</u></b>	<b><u>2260</u></b>	390	2260	391	2260							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"

Transparent huge pages were enabled for this run (OS default)

Set vm/nr\_hugepages=114688 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS Configuration:  
Thermal Configuration set to Maximum Cooling  
Performance Determinism set to Power Deterministic  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10  
(2.20 GHz, AMD EPYC 7601)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2210

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled  
Workload Pofile set to General Throughput Compute  
Minimum Processor Idle Power Core C-State set to C6 State

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/home/cpu2006/amd1603-rate-libs-revA/32:/home/cpu2006/amd1603-rate-libs-revA/64"

The binaries were built with the x86 Open64 Compiler Suite,  
which is only available from (and supported by) AMD at  
<http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10  
(2.20 GHz, AMD EPYC 7601)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 2210

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Nov 20 12:43:40 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2017.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 4