



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7601)

SPECfp_rate2006 = 1980

SPECfp_rate_base2006 = 1790

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

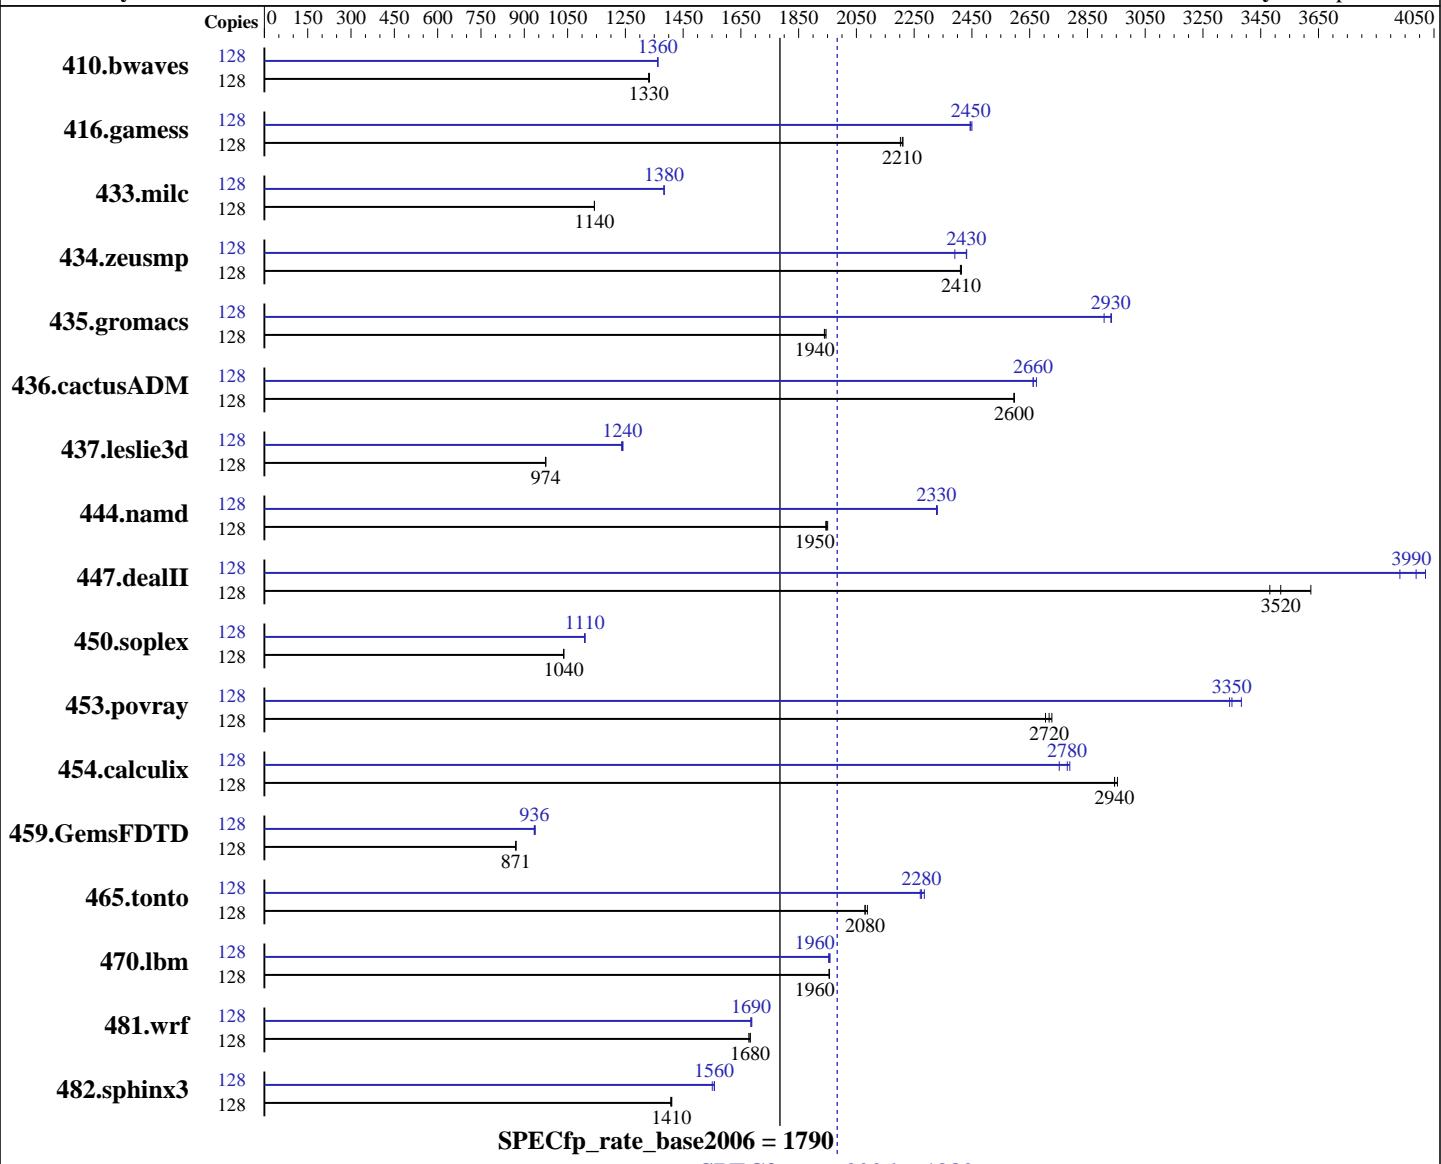

Hardware

CPU Name: AMD EPYC 7601
CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 64 cores, 2 chips, 32 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 64 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP3
Compiler: Kernel 4.4.73-5-default
Auto Parallel: C/C++/Fortran: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECfp_rate2006 = 1980

SPECfp_rate_base2006 = 1790

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Operating System Notes (Continued)

Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=114688 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Performance Determinism set to Power Deterministic
Processor Power and Utilization Monitoring set to Disabled
Workload Pofile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C6 State

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revA/32:/home/cpu2006/amd1603-rate-libs-revA/64"

The binaries were built with the x86 Open64 Compiler Suite,
which is only available from (and supported by) AMD at
<http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECfp_rate2006 = 1980

SPECfp_rate_base2006 = 1790

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
    -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs

```

C++ benchmarks:

```

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

Fortran benchmarks:

```

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

Benchmarks using both Fortran and C:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on
-OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

opencc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECfp_rate2006 = 1980

SPECfp_rate_base2006 = 1790

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Peak Compiler Invocation (Continued)

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
    -fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
    -IPA:plimit=7000 -IPA:callee_limit=1200
    -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
    -march=bdver1 -mno-fma4

```

```

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
    -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mno-fma4
    -mso

```

```

482.sphinx3: -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2
    -CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
    -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
    -mso -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECfp_rate2006 = 1980

SPECfp_rate_base2006 = 1790

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
           -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
           -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
           -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver2
           -mno-fma4 -WB, -mno-xop -mno-tbm
```

```
447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
             -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
             -OPT:unroll_times_max=8 -OPT:unroll_size=256
             -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
             -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
             -march=bdver1 -mno-fma4
```

```
450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
             -LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
             -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
             -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
             -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
             -march=bdver1
```

```
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
             -CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
             -OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
             -march=bdver2 -mno-fma4 -WB, -mno-xop -mno-tbm -Wl,
             -z,muldefs
```

Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
             -LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
             -LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
             -HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver2 -mno-fma4
```

```
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
             -OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
             -WOPT:sib=on -march=bdver1 -mno-fma4
```

```
434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
             -LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
             -HP:bdt=2m:heap=2m -march=bdver2 -mno-fma4
```

```
437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
               -HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7601)

SPECfp_rate2006 = 1980

SPECfp_rate_base2006 = 1790

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1 -mno-fma4

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver2 -WB, -mno-fma4 -mno-tbm
-mno-xop

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver2 -mno-fma4 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver2
-mno-fma4

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1 -mno-fma4

481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
-WOPT:sib=on -march=bdver1 -mno-fma4

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Nov 20 12:43:44 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2017.