



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECfp®_rate2006 = Not Run

SPECfp_rate_base2006 = 1220

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

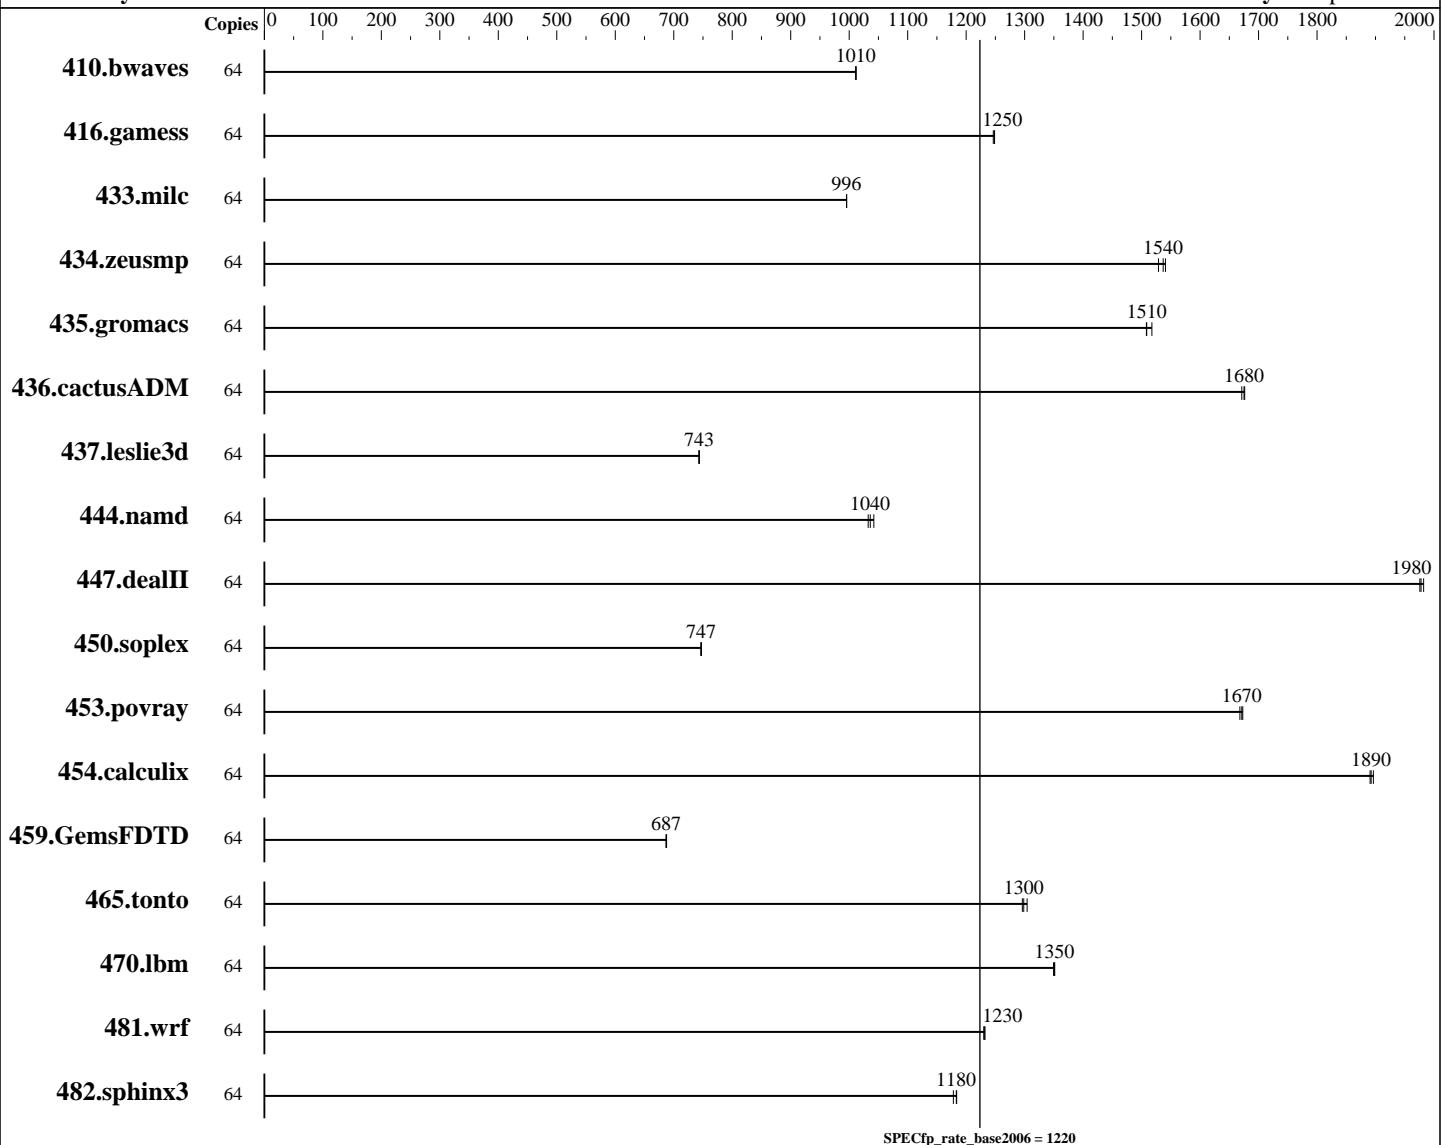

Hardware

CPU Name: Intel Xeon Gold 6130
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
Compiler: Kernel 4.4.21-69-default
C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.10 GHz, Intel Xeon Gold 6130)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1220

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

L3 Cache: 22 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	860	1010	860	1010	860	1010							
416.gamess	64	1004	1250	1004	1250	1005	1250							
433.milc	64	590	996	590	995	590	996							
434.zeusmp	64	381	1530	379	1540	378	1540							
435.gromacs	64	303	1510	303	1510	301	1520							
436.cactusADM	64	457	1680	458	1670	456	1680							
437.leslie3d	64	809	743	810	743	809	744							
444.namd	64	497	1030	493	1040	495	1040							
447.dealII	64	369	1980	370	1980	371	1980							
450.soplex	64	715	747	714	747	715	746							
453.povray	64	204	1670	204	1670	204	1670							
454.calculix	64	279	1890	278	1900	279	1890							
459.GemsFDTD	64	988	687	989	687	987	688							
465.tonto	64	485	1300	483	1300	486	1300							
470.lbm	64	652	1350	651	1350	651	1350							
481.wrf	64	580	1230	581	1230	581	1230							
482.sphinx3	64	1059	1180	1054	1180	1054	1180							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1220

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Operating System Notes (Continued)

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa_balancing"

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E
Sysinfo program /home/specuser/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-lvuc Tue Nov 14 06:12:07 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
    2 "physical id"s (chips)
    64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 16
    siblings : 32
    physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
    cache size : 22528 KB
```

```
From /proc/meminfo
    MemTotal:       197550456 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1220

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:  
Linux linux-lvuc 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016  
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 14 00:38
```

```
SPEC is set to: /home/specuser/cpu2006  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda4        xfs   405G  151G  254G  38%  /home  
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS HPE U32 09/29/2017
```

```
Memory:
```

```
24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz
```

```
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/specuser/cpu2006/lib/ia32:/home/specuser/cpu2006/lib/intel64:/home/specuser/cpu2006/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1220

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10

(2.10 GHz, Intel Xeon Gold 6130)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1220

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 12 17:06:53 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 December 2017.