



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7301)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1290

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

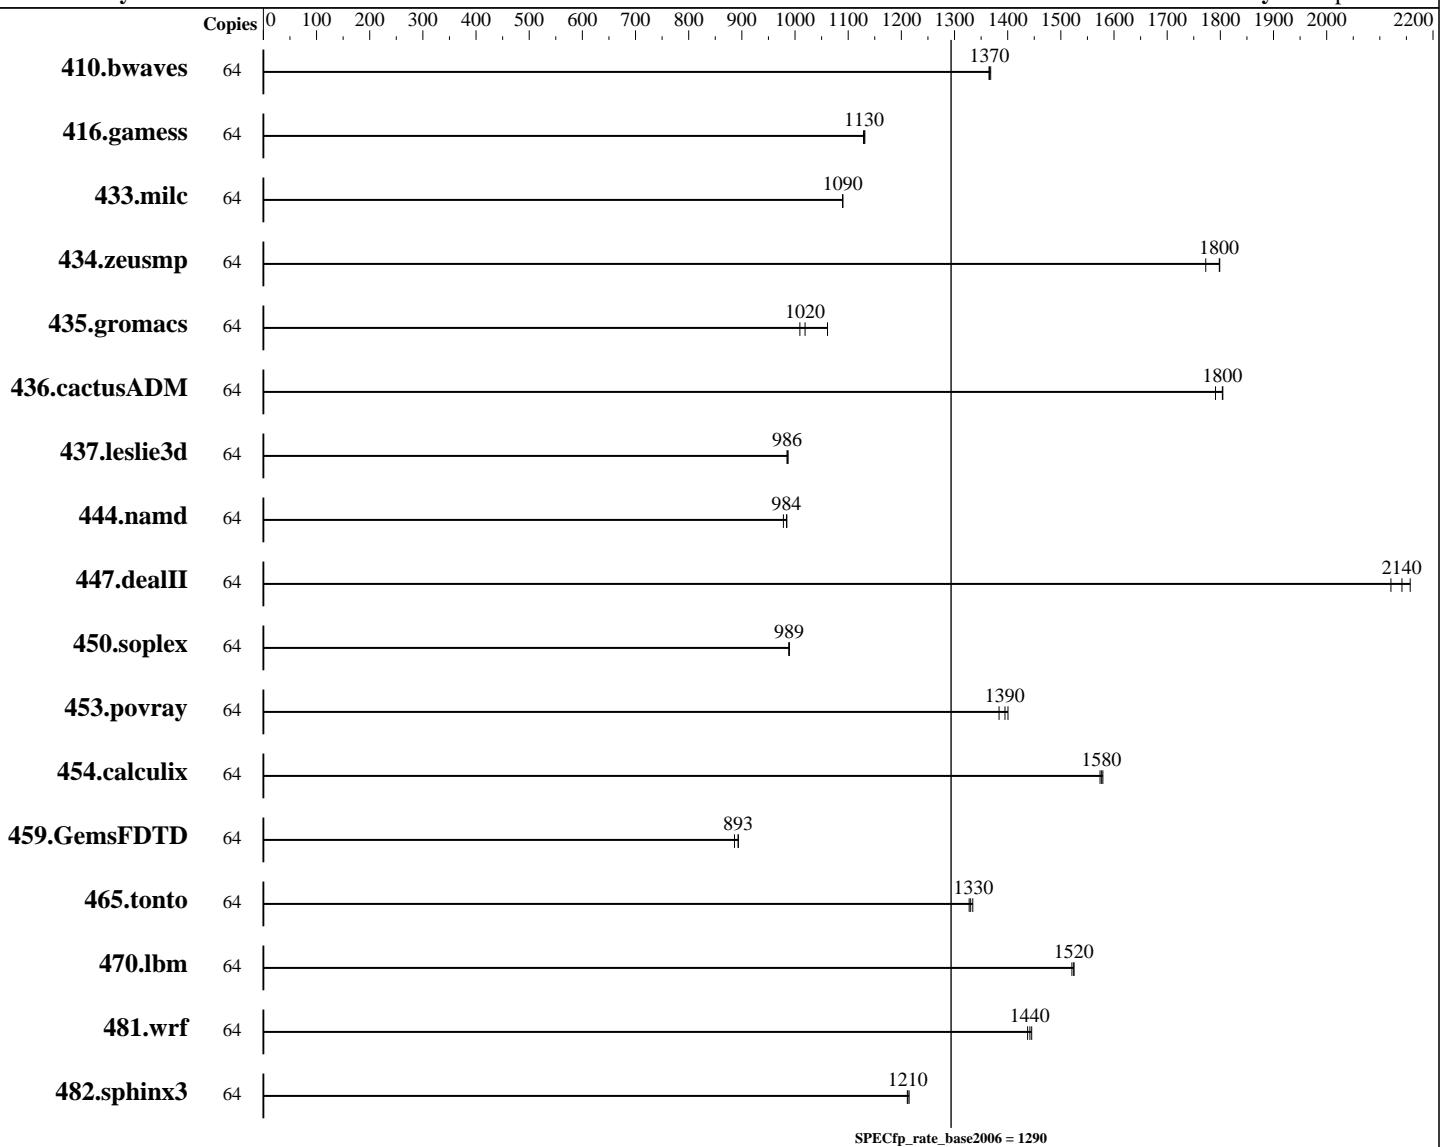

Hardware

CPU Name: AMD EPYC 7301
CPU Characteristics: AMD Turbo CORE technology up to 2.70 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 64 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP3
Compiler: Kernel 4.4.73-5-default
C/C++/Fortran: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7301)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other Cache: None
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	637	1360	637	1370	636	1370							
416.gamess	64	1109	1130	1108	1130	1110	1130							
433.milc	64	539	1090	539	1090	539	1090							
434.zeusmp	64	324	1800	324	1800	329	1770							
435.gromacs	64	431	1060	453	1010	448	1020							
436.cactusADM	64	427	1790	424	1800	424	1800							
437.leslie3d	64	611	985	610	987	610	986							
444.namd	64	525	978	522	984	521	985							
447.dealII	64	342	2140	339	2160	345	2120							
450.soplex	64	540	989	540	989	540	989							
453.povray	64	246	1380	244	1390	243	1400							
454.calculix	64	336	1570	335	1580	334	1580							
459.GemsFDTD	64	766	886	760	893	760	893							
465.tonto	64	472	1330	474	1330	473	1330							
470.lbm	64	578	1520	577	1520	577	1520							
481.wrf	64	496	1440	497	1440	495	1450							
482.sphinx3	64	1027	1210	1029	1210	1030	1210							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7301)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Operating System Notes (Continued)

Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"
Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
Workload Pofile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C6 State

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

The binaries were built with the x86 Open64 Compiler Suite,
which is only available from (and supported by) AMD at
<http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7301)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
          -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs

```

C++ benchmarks:

```

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

Fortran benchmarks:

```

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

Benchmarks using both Fortran and C:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on
-OPT:rsqrt=2 -OPT:unroll_size=256

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.20 GHz, AMD EPYC 7301)

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 12 17:06:53 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 December 2017.