



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8168,
2.70GHz

SPECfp®_rate2006 = Not Run
SPECfp_rate_base2006 = 6770

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

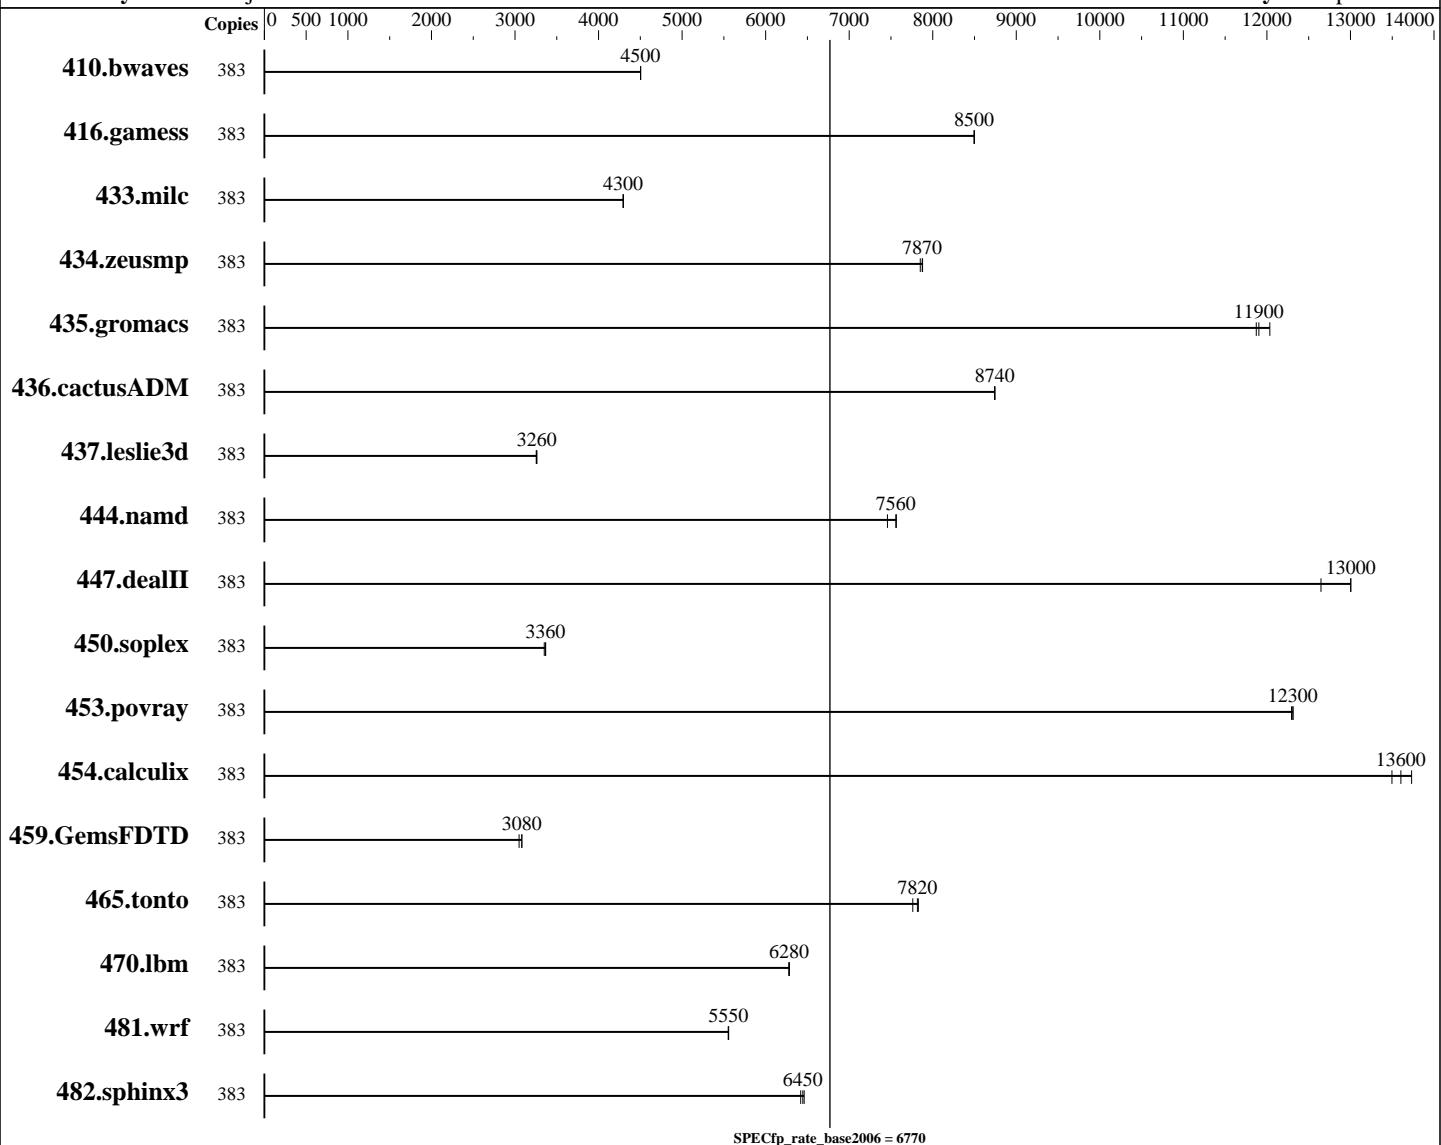

Hardware

CPU Name: Intel Xeon Platinum 8168
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 2700
FPU: Integrated
CPU(s) enabled: 192 cores, 8 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable: 2,4,6,8 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Auto Parallel: No
File System: tmpfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8168,
2.70GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6770

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

L3 Cache: 33 MB I+D on chip per chip
 Other Cache: None
 Memory: 1536 GB (96 x 16 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 768 GB tmpfs
 Other Hardware: 1 x SAS HDD, 600 GB, 10.5K RPM, used for swap

Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|------------|--------------|-------------|--------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 383 | 1156 | 4500 | 1156 | 4500 | 1156 | 4500 | | | | | | | |
| 416.gamess | 383 | 883 | 8500 | 882 | 8500 | 883 | 8500 | | | | | | | |
| 433.milc | 383 | 819 | 4300 | 818 | 4300 | 818 | 4300 | | | | | | | |
| 434.zeusmp | 383 | 443 | 7870 | 444 | 7850 | 442 | 7880 | | | | | | | |
| 435.gromacs | 383 | 227 | 12000 | 230 | 11900 | 230 | 11900 | | | | | | | |
| 436.cactusADM | 383 | 524 | 8740 | 524 | 8740 | 523 | 8740 | | | | | | | |
| 437.leslie3d | 383 | 1104 | 3260 | 1106 | 3250 | 1105 | 3260 | | | | | | | |
| 444.namd | 383 | 406 | 7560 | 406 | 7560 | 412 | 7460 | | | | | | | |
| 447.dealII | 383 | 337 | 13000 | 346 | 12600 | 337 | 13000 | | | | | | | |
| 450.soplex | 383 | 954 | 3350 | 949 | 3370 | 950 | 3360 | | | | | | | |
| 453.povray | 383 | 166 | 12300 | 165 | 12300 | 166 | 12300 | | | | | | | |
| 454.calculix | 383 | 230 | 13700 | 232 | 13600 | 234 | 13500 | | | | | | | |
| 459.GemsFDTD | 383 | 1333 | 3050 | 1319 | 3080 | 1319 | 3080 | | | | | | | |
| 465.tonto | 383 | 482 | 7820 | 481 | 7830 | 486 | 7760 | | | | | | | |
| 470.lbm | 383 | 838 | 6280 | 838 | 6280 | 838 | 6280 | | | | | | | |
| 481.wrf | 383 | 770 | 5560 | 770 | 5550 | 770 | 5550 | | | | | | | |
| 482.sphinx3 | 383 | 1158 | 6450 | 1163 | 6420 | 1155 | 6460 | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Set Kernel Boot Parameter : nohz_full=1-383 isolcpus=1-383
 Set CPU frequency governor to maximum performance with:
 cpupower -c all frequency-set -g performance
 Set tmpfs filesystem with:
 mkdir /home/memory
 mount -t tmpfs -o size=768g,rw tmpfs /home/memory
 Process tuning settings:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8168,
2.70GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6770

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
echo always > /sys/kernel/mm/transparent_hugepage/enabled
cpu idle state set with:
cpupower idle-set -d 2
cpupower idle-set -d 3
set affinity of rcu threads to the cpu0:
for i in `pgrep rcu` ; do taskset -pc 0 $i ; done
```

Platform Notes

BIOS configuration:

Intel Virtualization Technology = Disabled
HWPM Support = Disabled
DCU Streamer Prefetcher = Disabled
Stale AtoS = Enabled
LLC dead line alloc = Disabled
Sub NUMA Clustering = Enabled
Fan Control = Full
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-k55j Sat Nov 11 10:29:12 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
  8 "physical id"s (chips)
  384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 24
  siblings : 48
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
  physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
  physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
  physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
  physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
  physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
  27 28 29
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8168,
2.70GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6770

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
           27 28 29
cache size : 33792 KB

From /proc/meminfo
  MemTotal:       1583801256 kB
  HugePages_Total:      0
  Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-k55j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 11 02:33

SPEC is set to: /home/memory/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  768G   9.7G  759G    2% /home/memory
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU V1.0.0.0 R1.21.0 for D3858-Alx          09/15/2017
Memory:
 46x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
 50x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8168,
2.70GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6770

CPU2006 license: 19

Test date: Nov-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Sep-2017

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/memory/speccpu/icc2018lib/ia32:/home/memory/speccpu/icc2018lib/intel64"

LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/memory/speccpu/sh10.2"

Binaries compiled on a system with 2x Intel Xeon Platinum 8180 CPU + 384GB RAM
memory using SUSE Linux Enterprise Server 12 SP2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMEQUEST 3800B, Intel Xeon Platinum 8168,
2.70GHz

SPECfp_rate2006 = Not Run

SPECfp_rate_base2006 = 6770

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.html>
<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevC.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:06:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.